





VRL7380 Linear Profile Downlight

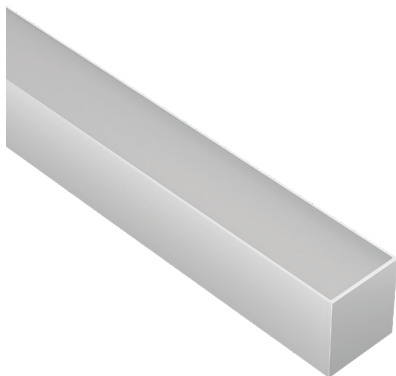

CODE	VRL7380F4	VRL7380F8
Dimension(mm)	1232x73x80mm	2451x73x80mm
System power (W)	34W	68W
Input Voltage(V)	AC 100-277V 50/60hz	
Light Source	SMD2835	
SDCM	<5	
CCT(K)	3000K/4000K standard. Different CCT upon request.	
Luminous (lm) ±5%	3349-3551lm	6698-7103lm
CRI	Ra>85	
Beam Angle (°)	96°	
LED Driver	Built-in Power supply	
Dimming Option	On-off / 1-10v / DAL / Triac	
IP Rating	IP20	
Product Colour	White /Black/ Silver	
Materials	Aluminum 6063-T5,	
Lifetime (hr)	50,000h	
Operating Temp.	-20°C~+45°C	

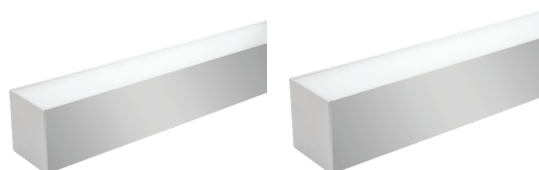

VRL7380F4

VRL7380F8

4ft Surface Mounted Code	VRL7380F4S	
	CCT	COLOR
VRL7380F4SC3WH	3000K	White
VRL7380F4SC4WH	4000K	White
VRL7380F4SC3BL	3000K	Black
VRL7380F4SC4BL	4000K	Black
VRL7380F4SC3SI	3000K	Silver
VRL7380F4SC4SI	4000K	Silver
4ft Pendant Code	VRL7380F4P	
	CCT	COLOR
VRL7380F4PC3WH	3000K	White
VRL7380F4PC4WH	4000K	White
VRL7380F4PC3BL	3000K	Black
VRL7380F4PC4BL	4000K	Black
VRL7380F4PC3SI	3000K	Silver
VRL7380F4PC4SI	4000K	Silver
8ft Surface Mounted Code	VRL7380F8S	
	CCT	COLOR
VRL7380F8SC3WH	3000K	White
VRL7380F8SC4WH	4000K	White
VRL7380F8SC3BL	3000K	Black
VRL7380F8SC4BL	4000K	Black
VRL7380F8SC3SI	3000K	Silver
VRL7380F8SC4SI	4000K	Silver
8ft Pendant Code	VRL7380F8P	
	CCT	COLOR
VRL7380F8PC3WH	3000K	White
VRL7380F8PC4WH	4000K	White
VRL7380F8PC3BL	3000K	Black
VRL7380F8PC4BL	4000K	Black
VRL7380F8PC3SI	3000K	Silver
VRL7380F8PC4SI	4000K	Silver

