

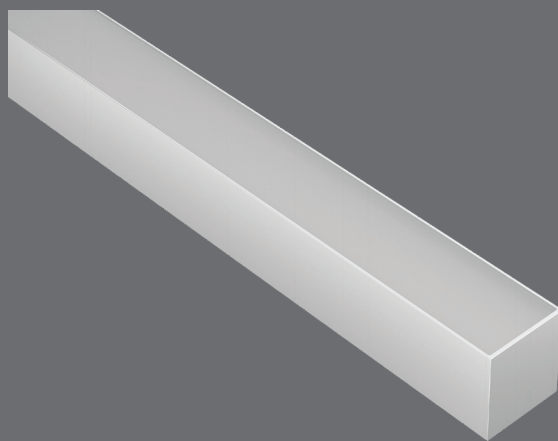



VRL7380



**Linear Profile
DOWNLIGHT**

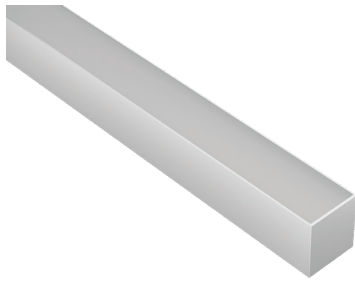



VRL7380F4

CODE	VRL7380F4
Dimension(mm)	1232x73x80mm
System power (W)	34W
Input Voltage(V)	AC 100-277V 50/60hz
Light Source	SMD2835
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	3349-3551lm
CRI	Ra>85
Beam Angle (°)	96°
LED Driver	Built-in Power supply
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White /Black/ Silver
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

4ft Surface Mounted Code	CCT	COLOR
VRL7380F4SC3WH	3000K	White
VRL7380F4SC4WH	4000K	White
VRL7380F4SC3BL	3000K	Black
VRL7380F4SC4BL	4000K	Black
VRL7380F4SC3SI	3000K	Silver
VRL7380F4SC4SI	4000K	Silver

4ft Pendant Code	CCT	COLOR
VRL7380F4PC3WH	3000K	White
VRL7380F4PC4WH	4000K	White
VRL7380F4PC3BL	3000K	Black
VRL7380F4PC4BL	4000K	Black
VRL7380F4PC3SI	3000K	Silver
VRL7380F4PC4SI	4000K	Silver



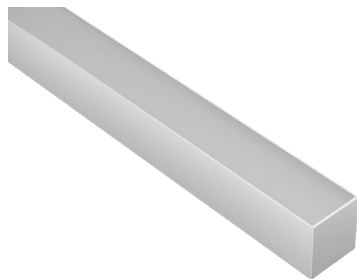

VRL7380F8

2451mm

CODE	VRL7380F8
Dimension(mm)	2451x73x80mm
System power (W)	68W
Input Voltage(V)	AC 100-277V 50/60hz
Light Source	SMD2835
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	6698-7103lm
CRI	Ra>85
Beam Angle (°)	96°
LED Driver	Built-in Power supply
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White /Black/ Silver
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

8ft Surface Mounted Code	CCT	COLOR
VRL7380F8SC3WH	3000K	White
VRL7380F8SC4WH	4000K	White
VRL7380F8SC3BL	3000K	Black
VRL7380F8SC4BL	4000K	Black
VRL7380F8SC3SI	3000K	Silver
VRL7380F8SC4SI	4000K	Silver

8ft Pendant Code	CCT	COLOR
VRL7380F8PC3WH	3000K	White
VRL7380F8PC4WH	4000K	White
VRL7380F8PC3BL	3000K	Black
VRL7380F8PC4BL	4000K	Black
VRL7380F8PC3SI	3000K	Silver
VRL7380F8PC4SI	4000K	Silver

