


VRLC






Tilttable
Recessed Downlight

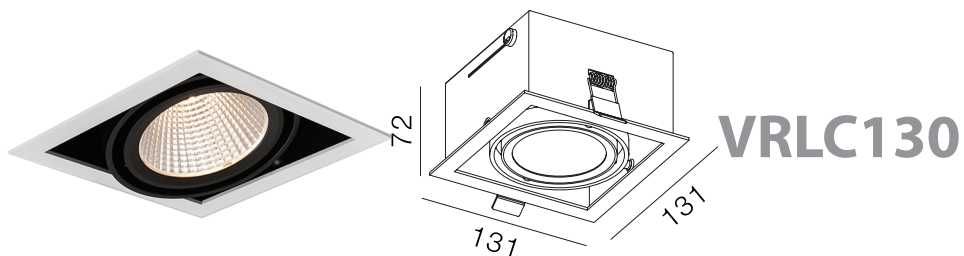

CODE	VRCL130
Dimension(mm)	131x131x72
Cutout (mm)	110x110
System power (W)	15W
Input Voltage(V)	DC 36V
Light Source	Bridgelux
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	1100lm
CRI	Ra>80
Beam Angle (°)	15°/ 24°/36°
LED Driver	External LED drivers
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Black / White
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~45°



Code	CCT	BEAM
VRCL130C3B15	3000K	15°
VRCL130C4B15	4000K	15°
VRCL130C3B24	3000K	24°
VRCL130C4B24	4000K	24°
VRCL130C3B36	3000K	36°
VRCL130C4B36	4000K	36°

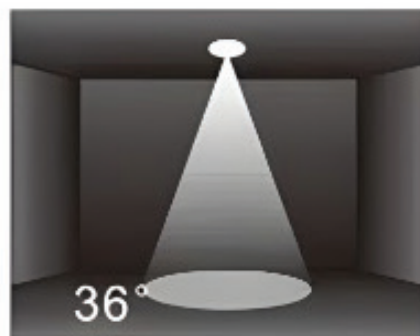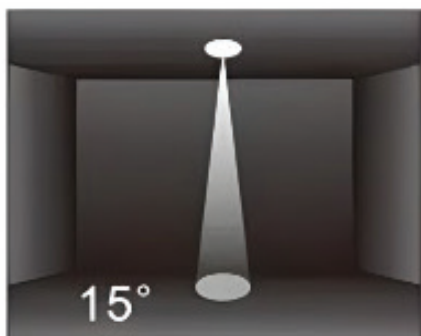


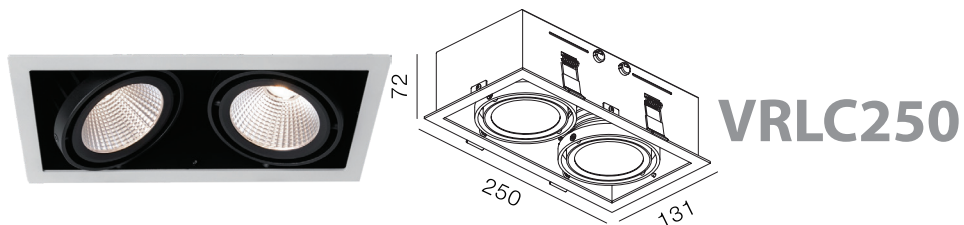

CODE	VRLC250
Dimension(mm)	250x131x72
Cutout (mm)	230x110
System power (W)	2x15W
Input Voltage(V)	DC 36V
Light Source	Bridgelux
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	2200lm
CRI	Ra>80
Beam Angle (°)	15°/ 24°/36°
LED Driver	External LED drivers
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Black / White
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~45°

Code	CCT	BEAM
VRLC250C3B15	3000K	15°
VRLC250C4B15	4000K	15°
VRLC250C3B24	3000K	24°
VRLC250C4B24	4000K	24°
VRLC250C3B36	3000K	36°
VRLC250C4B36	4000K	36°

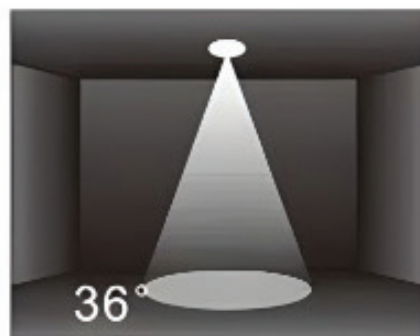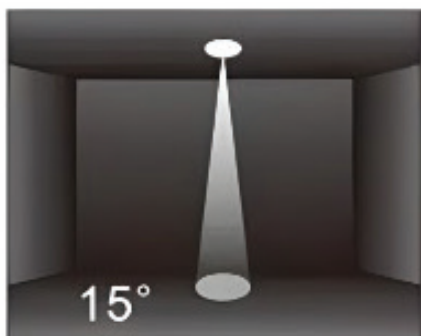

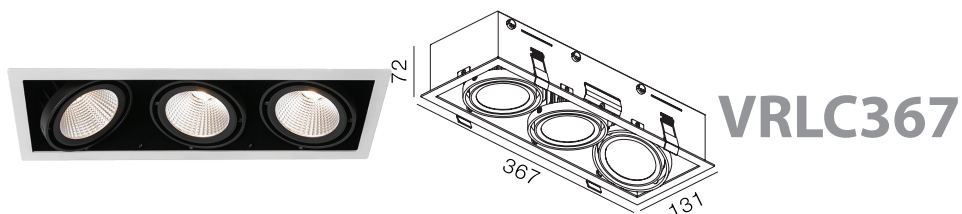

CODE	VRCLC367
Dimension(mm)	367x131x72
Cutout (mm)	345x110
System power (W)	3x15W
Input Voltage(V)	DC 36V
Light Source	Bridgelux
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	3100lm
CRI	Ra>80
Beam Angle (°)	aa
LED Driver	External LED drivers
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Black / White
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~45°

Code	CCT	BEAM
VRCLC367C3B15	3000K	15°
VRCLC367C4B15	4000K	15°
VRCLC367C3B24	3000K	24°
VRCLC367C4B24	4000K	24°
VRCLC367C3B36	3000K	36°
VRCLC367C4B36	4000K	36°

