


VRMB





Mini Recessed Downlight




VRMB6W

CODE	VRMB6W
Dimension(mm)	Ø40*H75
Cutout (mm)	Ø35
System power (W)	6W
Input Voltage(V)	DC 12V
Light Source	CREE
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	15°/ 24°/36°
LED Driver	External LED drivers: constant-current
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

	CCT	BEAM
VRMB6WC3B15	3000K	15°
VRMB6WC4B15	4000K	15°
VRMB6WC3B24	3000K	24°
VRMB6WC4B24	4000K	24°
VRMB6WC3B36	3000K	36°
VRMB6WC4B36	4000K	36°


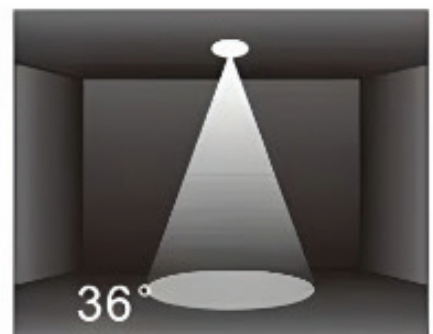
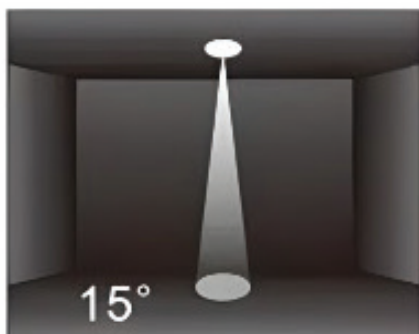





VRMB8W

CODE	VRMB8W
Dimension(mm)	Ø53*H80
Cutout (mm)	Ø50
System power (W)	8W
Input Voltage(V)	DC 32V
Light Source	CITIZEN
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	15°/ 24°/36°
LED Driver	External LED drivers: constant-current
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

	CCT	BEAM
VRMB8WC3B15	3000K	15°
VRMB8WC4B15	4000K	15°
VRMB8WC3B24	3000K	24°
VRMB8WC4B24	4000K	24°
VRMB8WC3B36	3000K	36°
VRMB8WC4B36	4000K	36°

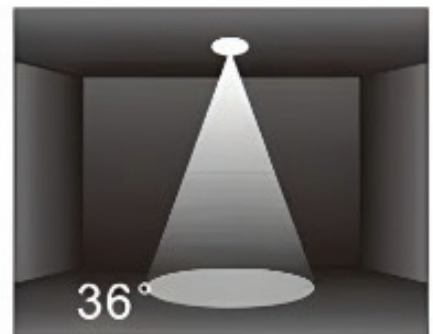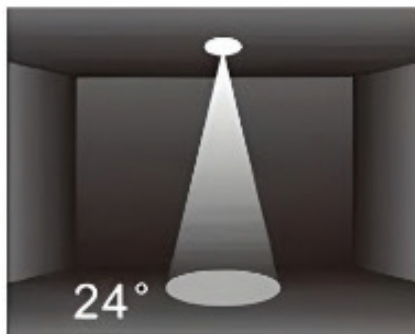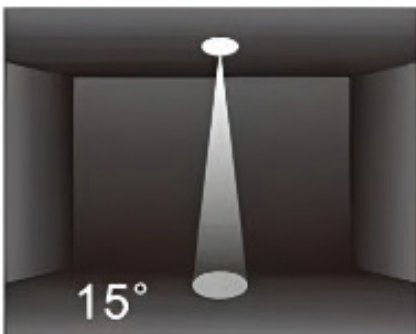



VRMB10W

CODE	VRMB10W
Dimension(mm)	Ø53*H80
Cutout (mm)	Ø50
System power (W)	10W
Input Voltage(V)	DC 32V
Light Source	CITIZEN
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	15°/ 24°/36°
LED Driver	External LED drivers: constant-current
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

	CCT	BEAM
VRMB10WC3B15	3000K	15°
VRMB10WC4B15	4000K	15°
VRMB10WC3B24	3000K	24°
VRMB10WC4B24	4000K	24°
VRMB10WC3B36	3000K	36°
VRMB10WC4B36	4000K	36°

