


VRSL

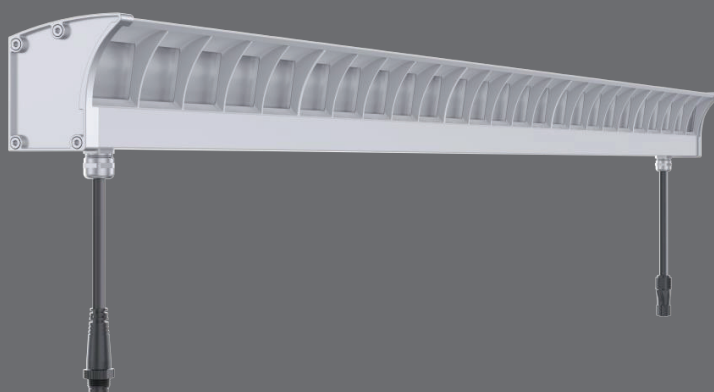

Industrial light **Linear Sport Light**


IP65

 HOURS
50000

CRI ≥ 80

RoHS


CE

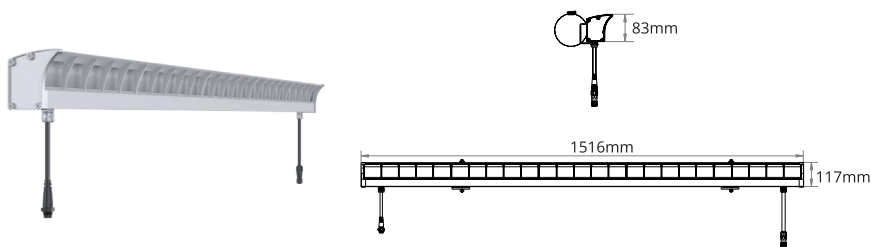


VRSL30

CODE	VRSL30
Dimension(mm)	1511x117x83mm
System power (W)	30W
Input Voltage(V)	AC220-240V, 50/60Hz
Light Source	Philips
SDCM	<5
CCT(K)	3000K/4000K/6500K
Luminous (lm) ±5%	150lm/W
CRI	Ra>70
Beam Angle (°)	P70°
LED Driver	Osram
Dimming Option	On-off
IP Rating	IP65
Materials	Pure Aluminum body
Lifetime (hr)	50,000h
Operating Temp.	-40~50°C

VRSL30	CCT
VRSL30C3	3000K
VRSL30C4	4000K
VRSL30C65	6500K

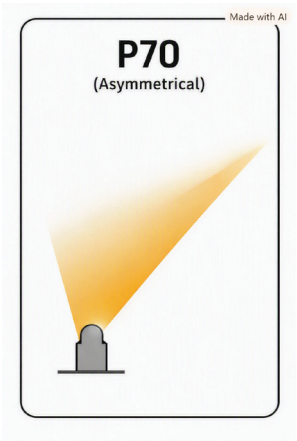


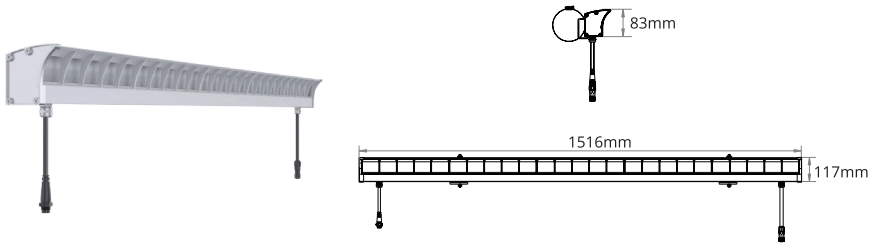


VRSL40

CODE	VRSL40
Dimension(mm)	1511x117x83mm
System power (W)	43W
Input Voltage(V)	AC220-240V, 50/60Hz
Light Source	Philips
SDCM	<5
CCT(K)	3000K/4000K/6500K
Luminous (lm) ±5%	150lm/W
CRI	Ra>70
Beam Angle (°)	P70°
LED Driver	Osram
Dimming Option	On-off
IP Rating	IP65
Materials	Pure Aluminum body
Lifetime (hr)	50,000h
Operating Temp.	-40~50°C

VRSL40	CCT
VRSL40C3	3000K
VRSL40C4	4000K
VRSL40C65	6500K

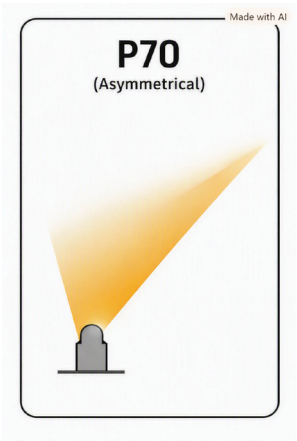


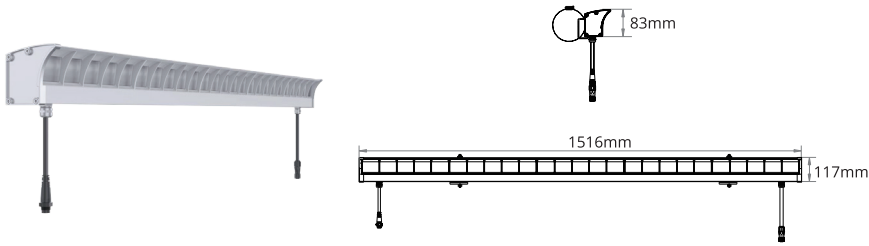


VRSL60

CODE	VRSL60
Dimension(mm)	1511x117x83mm
System power (W)	60W
Input Voltage(V)	AC220-240V, 50/60Hz
Light Source	Philips
SDCM	<5
CCT(K)	3000K/4000K/6500K
Luminous (lm) ±5%	150lm/W
CRI	Ra>70
Beam Angle (°)	P70°
LED Driver	Osram
Dimming Option	On-off
IP Rating	IP65
Materials	Pure Aluminum body
Lifetime (hr)	50,000h
Operating Temp.	-40~50°C

VRSL60	CCT
VRSL60C3	3000K
VRSL60C4	4000K
VRSL60C65	6500K

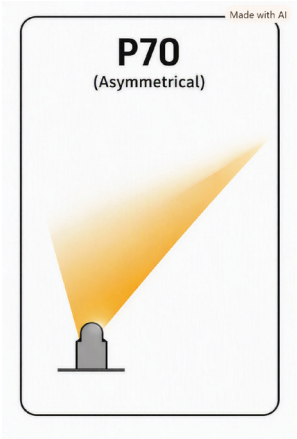

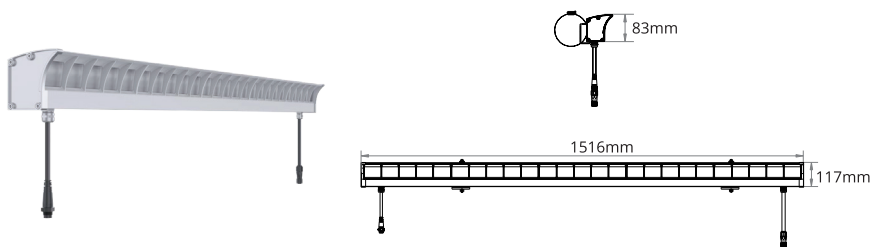

VRSL80

CODE	VRSL80
Dimension(mm)	1511x117x83mm
System power (W)	80W
Input Voltage(V)	AC220-240V, 50/60Hz
Light Source	Philips
SDCM	<5
CCT(K)	3000K/4000K/6500K
Luminous (lm) ±5%	150lm/W
CRI	Ra>70
Beam Angle (°)	P70°
LED Driver	Osram
Dimming Option	On-off
IP Rating	IP65
Materials	Pure Aluminum body
Lifetime (hr)	50,000h
Operating Temp.	-40~50°C

VRSL80	CCT
VRSL80C3	3000K
VRSL80C4	4000K
VRSL80C65	6500K

