



VRT390

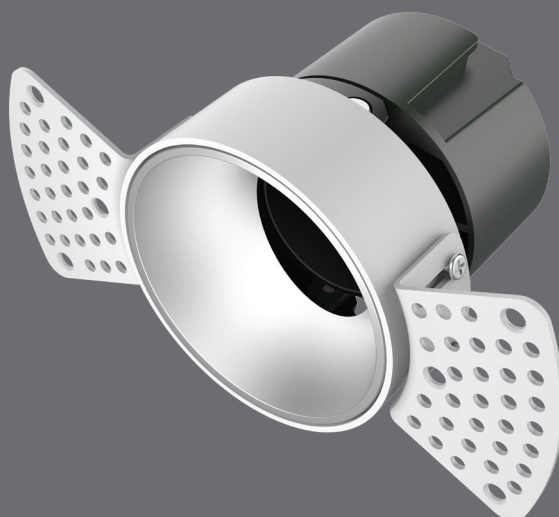




Tilttable **TRIMLESS DOWNLIGHT**




VRT390S5W

CODE	VRT390S5W
Dimension(mm)	Φ110x70mm
Cutout (mm)	Φ65mm
System power (W)	5W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	8°/15°/24°/38°/55°
LED Driver	External LED driver
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

Code	CCT	BEAM
VRT390S5WC3B8	3000K	8°
VRT390S5WC4B8	4000K	8°
VRT390S5WC3B15	3000K	15°
VRT390S5WC4B15	4000K	15°
VRT390S5WC3B24	3000K	24°
VRT390S5WC4B24	4000K	24°
VRT390S5WC3B38	3000K	38°
VRT390S5WC4B38	4000K	38°
VRT390S5WC3B55	3000K	55°
VRT390S5WC4B55	4000K	55°









VRT390S8W

CODE	VRT390S8W
Dimension(mm)	Ø110x70mm
Cutout (mm)	Ø65mm
System power (W)	8W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	8°/15°/24°/38°/55°
LED Driver	External LED driver
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

Code	CCT	BEAM
VRT390S8WC3B8	3000K	8°
VRT390S8WC4B8	4000K	8°
VRT390S8WC3B15	3000K	15°
VRT390S8WC4B15	4000K	15°
VRT390S8WC3B24	3000K	24°
VRT390S8WC4B24	4000K	24°
VRT390S8WC3B38	3000K	38°
VRT390S8WC4B38	4000K	38°
VRT390S8WC3B55	3000K	55°
VRT390S8WC4B55	4000K	55°









VRT390M10W

CODE	VRT390M10W
Dimension(mm)	Φ145x80mm
Cutout (mm)	Φ85mm
System power (W)	10W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	8°/15°/24°/38°/55°
LED Driver	External LED driver
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

Code	CCT	BEAM
VRT390M10WC3B8	3000K	8°
VRT390M10WC4B8	4000K	8°
VRT390M10WC3B15	3000K	15°
VRT390M10WC4B15	4000K	15°
VRT390M10WC3B24	3000K	24°
VRT390M10WC4B24	4000K	24°
VRT390M10WC3B38	3000K	38°
VRT390M10WC4B38	4000K	38°
VRT390M10WC3B55	3000K	55°
VRT390M10WC4B55	4000K	55°










VRT390M18W

CODE	VRT390M18W
Dimension(mm)	Φ145x80mm
Cutout (mm)	Φ85mm
System power (W)	18W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	8°/15°/24°/38°/55°
LED Driver	External LED driver
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

Code	CCT	BEAM
VRT390M18WC3B8	3000K	8°
VRT390M18WC4B8	4000K	8°
VRT390M18WC3B15	3000K	15°
VRT390M18WC4B15	4000K	15°
VRT390M18WC3B24	3000K	24°
VRT390M18WC4B24	4000K	24°
VRT390M18WC3B38	3000K	38°
VRT390M18WC4B38	4000K	38°
VRT390M18WC3B55	3000K	55°
VRT390M18WC4B55	4000K	55°






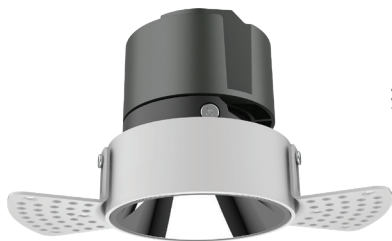


VRT390L18W

CODE	VRT390L18W
Dimension(mm)	Φ172X100mm
Cutout (mm)	Φ105mm
System power (W)	18W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	8°/15°/24°/38°/55°
LED Driver	External LED driver
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

Code	CCT	BEAM
VRT390L18WC3B8	3000K	8°
VRT390L18WC4B8	4000K	8°
VRT390L18WC3B15	3000K	15°
VRT390L18WC4B15	4000K	15°
VRT390L18WC3B24	3000K	24°
VRT390L18WC4B24	4000K	24°
VRT390L18WC3B38	3000K	38°
VRT390L18WC4B38	4000K	38°
VRT390L18WC3B55	3000K	55°
VRT390L18WC4B55	4000K	55°





VRT390L24W

CODE	VRT390L24W
Dimension(mm)	Φ172X100mm
Cutout (mm)	Φ105mm
System power (W)	24.5W
Input Voltage(V)	220-240VAC 50/60Hz
Light Source	Osram COB
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	140 lm/W
CRI	Ra>80
Beam Angle (°)	8°/15°/24°/38°/55°
LED Driver	External LED driver
Dimming Option	On-off / 1-10v / Triac / Dali
UGR	<19
IP Rating	IP20
Product Colour	Black
Front Ring Colour	Matt Black / Matt White / Silver
Materials	Aluminum Die-casting
Lifetime (hr)	50,000h
Operating Temp.	-20°~50°

Code	CCT	BEAM
VRT390L24WC3B8	3000K	8°
VRT390L24WC4B8	4000K	8°
VRT390L24WC3B15	3000K	15°
VRT390L24WC4B15	4000K	15°
VRT390L24WC3B24	3000K	24°
VRT390L24WC4B24	4000K	24°
VRT390L24WC3B38	3000K	38°
VRT390L24WC4B38	4000K	38°
VRT390L24WC3B55	3000K	55°
VRT390L24WC4B55	4000K	55°

