

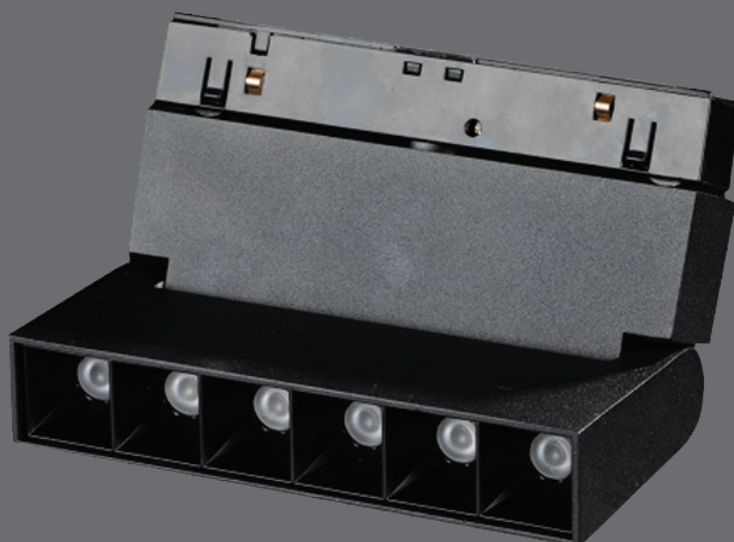


VRXMTG




Grille Light X Series Magnetic Track




VRXMTG06

CODE	VRXMTG06
Dimension(mm)	120x22x85mm
System power (W)	6W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	24°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White ,Silver, Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	COLOR
VRXMTG06C3WH	3000K	White
VRXMTG06C4WH	4000K	White
VRXMTG06C3BL	3000K	Black
VRXMTG06C4BL	4000K	Black

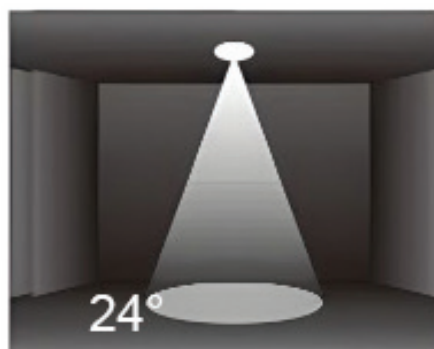




VRXMTG12

CODE	VRXMTG12
Dimension(mm)	231x22xH85mm
System power (W)	12W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	24°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White ,Silver, Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C


Code	CCT	COLOR
VRXMTG12C3WH	3000K	White
VRXMTG12C4WH	4000K	White
VRXMTG12C3BL	3000K	Black
VRXMTG12C4BL	4000K	Black

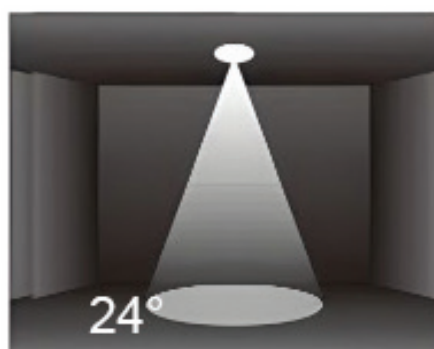

VRXMTDG




Grille Light X Series Magnetic Track




VRXMTDG06

CODE	VRXMTDG06
Dimension(mm)	120x22x45mm
System power (W)	6W
Input Voltage(V)	DC 24V/48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	24°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White , Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	COLOR
VRXMTDG06C3WH	3000K	White
VRXMTDG06C4WH	4000K	White
VRXMTDG06C3BL	3000K	Black
VRXMTDG06C4BL	4000K	Black

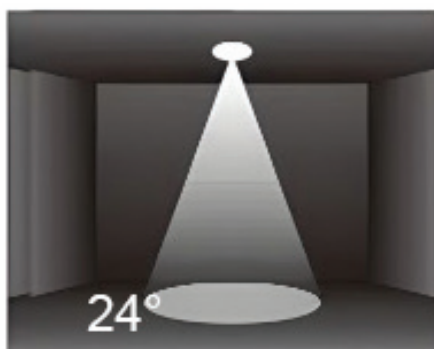



VRXMTDG12

CODE	VRXMTDG12
Dimension(mm)	220x20x45mm
System power (W)	12W
Input Voltage(V)	DC 24V/48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	24°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White , Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	COLOR
VRXMTDG12C3WH	3000K	White
VRXMTDG12C4WH	4000K	White
VRXMTDG12C3BL	3000K	Black
VRXMTDG12C4BL	4000K	Black

