


VRXMT





Spot Light X Series Magnetic Track




VRXMTS3W

CODE	VRXMTS3W
Dimension(mm)	Φ35x55mm
System power (W)	3W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	15°/24°/38°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White , Black
Materials	Aluminum
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	Beam A.	COLOR
VRXMTS3WC3B15WH	3000K	15°	White
VRXMTS3WC4B15WH	4000K	15°	White
VRXMTS3WC3B15BL	3000K	15°	Black
VRXMTS3WC4B15BL	4000K	15°	Black
VRXMTS3WC3B24WH	3000K	24°	White
VRXMTS3WC4B24WH	4000K	24°	White
VRXMTS3WC3B24BL	3000K	24°	Black
VRXMTS3WC4B24BL	4000K	24°	Black
VRXMTS3WC3B38WH	3000K	38°	White
VRXMTS3WC4B38WH	4000K	38°	White
VRXMTS3WC3B38BL	3000K	38°	Black
VRXMTS3WC4B38BL	4000K	38°	Black

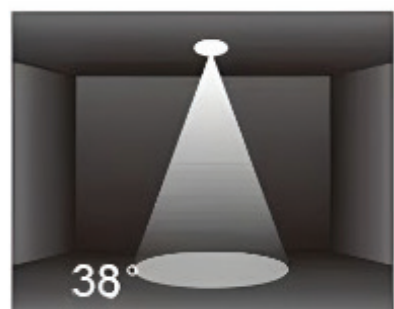
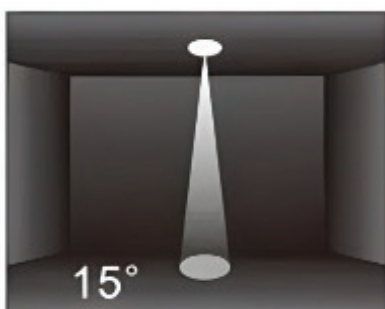





VRXMTS5W

CODE	VRXMTS5W
Dimension(mm)	Φ35x68mm
System power (W)	5W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	15°/24°/38°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White , Black
Materials	Aluminum
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	Beam A.	COLOR
VRXMTS5WC3B15WH	3000K	15°	White
VRXMTS5WC4B15WH	4000K	15°	White
VRXMTS5WC3B15BL	3000K	15°	Black
VRXMTS5WC4B15BL	4000K	15°	Black
VRXMTS5WC3B24WH	3000K	24°	White
VRXMTS5WC4B24WH	4000K	24°	White
VRXMTS5WC3B24BL	3000K	24°	Black
VRXMTS5WC4B24BL	4000K	24°	Black
VRXMTS5WC3B38WH	3000K	38°	White
VRXMTS5WC4B38WH	4000K	38°	White
VRXMTS5WC3B38BL	3000K	38°	Black
VRXMTS5WC4B38BL	4000K	38°	Black

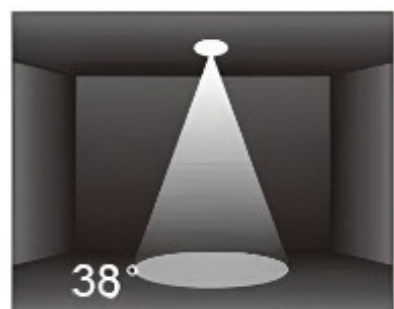
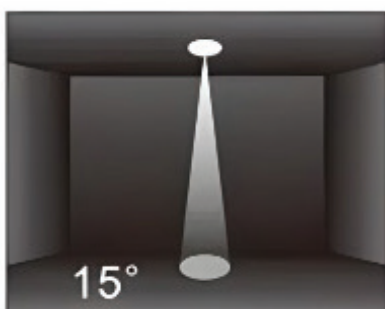





VRXMTS7W

CODE	VRXMTS7W
Dimension(mm)	Φ45x82mm
System power (W)	7W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	15°/24°/38°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White , Black
Materials	Aluminum
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	Beam A.	COLOR
VRXMTS7WC3B15WH	3000K	15°	White
VRXMTS7WC4B15WH	4000K	15°	White
VRXMTS7WC3B15BL	3000K	15°	Black
VRXMTS7WC4B15BL	4000K	15°	Black
VRXMTS7WC3B24WH	3000K	24°	White
VRXMTS7WC4B24WH	4000K	24°	White
VRXMTS7WC3B24BL	3000K	24°	Black
VRXMTS7WC4B24BL	4000K	24°	Black
VRXMTS7WC3B38WH	3000K	38°	White
VRXMTS7WC4B38WH	4000K	38°	White
VRXMTS7WC3B38BL	3000K	38°	Black
VRXMTS7WC4B38BL	4000K	38°	Black

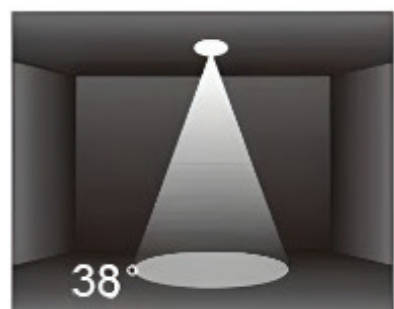
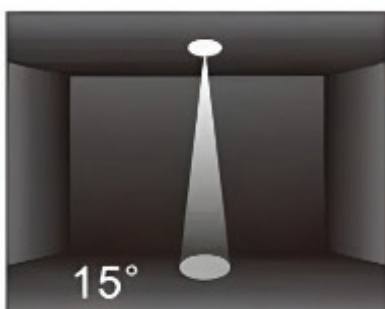





VRXMTS12W

CODE	VRXMTS12W
Dimension(mm)	Ø55x140mm
System power (W)	12W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	15°/24°/38°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White , Black
Materials	Aluminum
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	Beam A.	COLOR
VRXMTS12WC3B15WH	3000K	15°	White
VRXMTS12WC4B15WH	4000K	15°	White
VRXMTS12WC3B15BL	3000K	15°	Black
VRXMTS12WC4B15BL	4000K	15°	Black
VRXMTS12WC3B24WH	3000K	24°	White
VRXMTS12WC4B24WH	4000K	24°	White
VRXMTS12WC3B24BL	3000K	24°	Black
VRXMTS12WC4B24BL	4000K	24°	Black
VRXMTS12WC3B38WH	3000K	38°	White
VRXMTS12WC4B38WH	4000K	38°	White
VRXMTS12WC3B38BL	3000K	38°	Black
VRXMTS12WC4B38BL	4000K	38°	Black

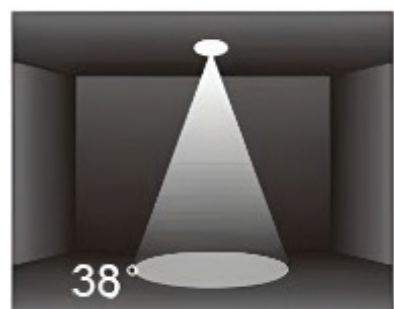
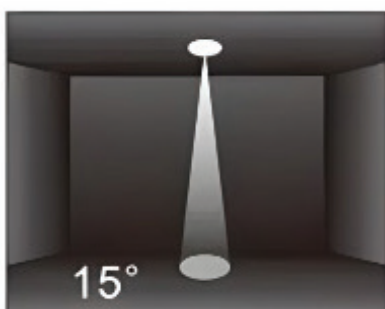





VRXMTS15W

CODE	VRXMTS15W
Dimension(mm)	Ø55x140mm
System power (W)	15W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	15°/24°/38°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White , Black
Materials	Aluminum
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	Beam A.	COLOR
VRXMTS15WC3B15WH	3000K	15°	White
VRXMTS15WC4B15WH	4000K	15°	White
VRXMTS15WC3B15BL	3000K	15°	Black
VRXMTS15WC4B15BL	4000K	15°	Black
VRXMTS15WC3B24WH	3000K	24°	White
VRXMTS15WC4B24WH	4000K	24°	White
VRXMTS15WC3B24BL	3000K	24°	Black
VRXMTS15WC4B24BL	4000K	24°	Black
VRXMTS15WC3B38WH	3000K	38°	White
VRXMTS15WC4B38WH	4000K	38°	White
VRXMTS15WC3B38BL	3000K	38°	Black
VRXMTS15WC4B38BL	4000K	38°	Black

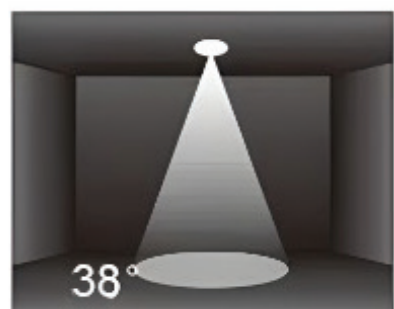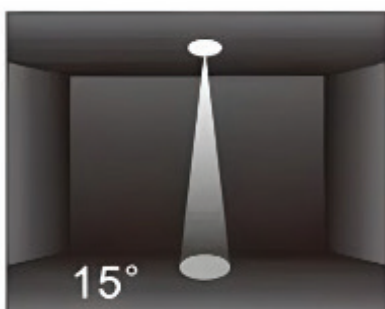



VRXMTS20W

CODE	VRXMTS20W
Dimension(mm)	Ø75x145mm
System power (W)	20W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	15°/24°/38°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White , Black
Materials	Aluminum
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	Beam A.	COLOR
VRXMTS20WC3B15WH	3000K	15°	White
VRXMTS20WC4B15WH	4000K	15°	White
VRXMTS20WC3B15BL	3000K	15°	Black
VRXMTS20WC4B15BL	4000K	15°	Black
VRXMTS20WC3B24WH	3000K	24°	White
VRXMTS20WC4B24WH	4000K	24°	White
VRXMTS20WC3B24BL	3000K	24°	Black
VRXMTS20WC4B24BL	4000K	24°	Black
VRXMTS20WC3B38WH	3000K	38°	White
VRXMTS20WC4B38WH	4000K	38°	White
VRXMTS20WC3B38BL	3000K	38°	Black
VRXMTS20WC4B38BL	4000K	38°	Black

