


VRXMTF




Flood Light **X Series Magnetic Track**




VRXMTF10

CODE	VRXMTF10
Dimension(mm)	300x20x25mm
System power (W)	10W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	120°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White ,Silver, Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	COLOR
VRXMTF10C3WH	3000K	White
VRXMTF10C4WH	4000K	White
VRXMTF10C3BL	3000K	Black
VRXMTF10C4BL	4000K	Black

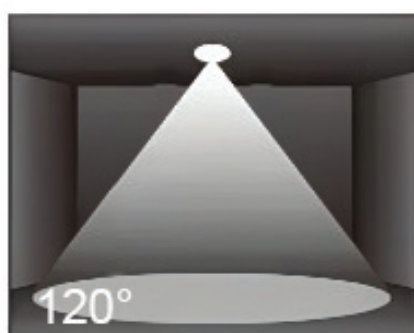


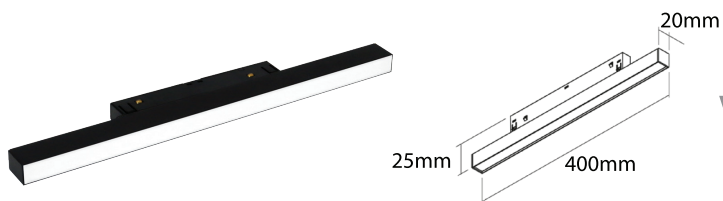

VRXMTF12

CODE	VRXMTF12
Dimension(mm)	400x20x25mm
System power (W)	12W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	120°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White ,Silver, Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	COLOR
VRXMTF12C3WH	3000K	White
VRXMTF12C4WH	4000K	White
VRXMTF12C3BL	3000K	Black
VRXMTF12C4BL	4000K	Black

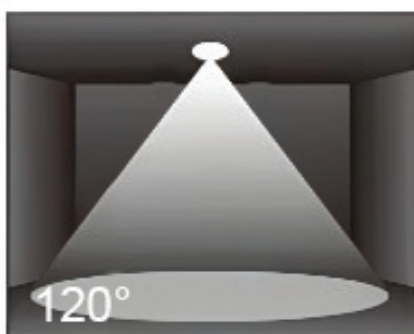



VRXMTF18

CODE	VRXMTF18
Dimension(mm)	600x20*x25mm
System power (W)	18W
Input Voltage(V)	DC 48V
Light Source	Osram
SDCM	<5
CCT(K)	3000K/4000K standard. Different CCT upon request.
Luminous (lm) ±5%	85lm/w
CRI	Ra≥85
Beam Angle (°)	120°
LED Driver	External
Dimming Option	On-off / 1-10v / DAL / Triac
IP Rating	IP20
Product Colour	White ,Silver, Black
Materials	Aluminum 6063-T5,
Lifetime (hr)	50,000h
Operating Temp.	-20°C~+45°C

Code	CCT	COLOR
VRXMTF18C3WH	3000K	White
VRXMTF18C4WH	4000K	White
VRXMTF18C3BL	3000K	Black
VRXMTF18C4BL	4000K	Black

