Prati



MADE IN USA

Prati

COLORS & SIZES

RECTIFIED COLOR BODY PORCELAIN TILE

DOLOMITE

24″ x 48″
Matte 1103931
Polished 1103948

12″ x 24″
Matte 1103989
Polished 1103997

12″ x 12″
(36 DOT) Mosaic
Matte 1105322
Polished 1105326

12″ x 12″
Hexagon Mosaic
Matte 1105417
Polished 1105421

3″ x 12″
Bullnose
Matte 1105425
Polished 1105429

BORGHINI WARM



24″ x 48″
Matte 1103926
Polished 1103943


12″ x 24″
Matte 1103984
Polished 1103992

12″ x 12″
(36 DOT) Mosaic
Matte 1105321
Polished 1105325

12″ x 12″
Hexagon Mosaic
Matte 1105416
Polished 1105420

3″ x 12″
Bullnose
Matte 1105424
Polished 1105428

MACCHIA VECCHIA

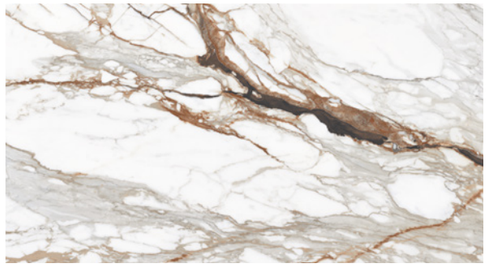

24″ x 48″
Matte 1103925
Polished 1103941


12″ x 24″
Matte 1103982
Polished 1103991

12″ x 12″
(36 DOT) Mosaic
Matte 1105320
Polished 1105324

12″ x 12″
Hexagon Mosaic
Matte 1105415
Polished 1105419

3″ x 12″
Bullnose
Matte 1105423
Polished 1105427

BRECCIA GREY

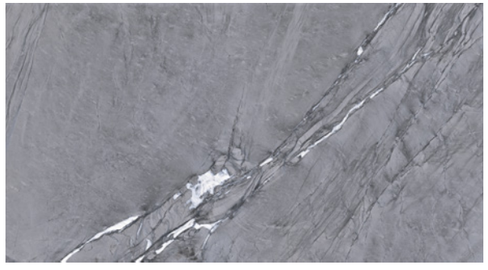

24″ x 48″
Matte 1103932
Polished 1103949

12″ x 24″
Matte 1103990
Polished 1103998

12″ x 12″
(36 DOT) Mosaic
Matte 1105323
Polished 1105329

12″ x 12″
Hexagon Mosaic
Matte 1105418
Polished 1105422

3″ x 12″
Bullnose
Matte 1105426
Polished 1105430

Green Memberships & Accreditations

Red List Free Declare. | hpd VERSION 2.0 | EPD® THE INTERNATIONAL EPD® SYSTEM | G2 GREEN SQUARED | GREENGUARD GOLD | bsi ISO 9001 Quality Management Systems CERTIFIED ISO 14001 Environmental Management CERTIFIED | TENNESSEE RECYCLING COALITION

POST - Consumer Recycled Content | PRE - Consumer Recycled Content | INTERNATIONAL LIVING FUTURE INSTITUTE | U.S. GREEN BUILDING COUNCIL MEMBER | TCNA TILE COUNCIL OF NORTH AMERICA, INC. | BENEFIT CORPORATION

Routine Care Instructions:

Colors shown may vary from actual product.
Final selection should be made from actual product samples.
Note: Sizes listed are nominal.



Prati Dolomite 24″x48″ Matte



Wall: Prati Dolomite 12″x24″ Polished
Floor: Prati Colomite 24″x48″ Matte

Prati Borghini Warm 24″x48″ Matte

Wall: Prati Borghini Warm 12″x24″ Polished
Backsplash: Prati Borghini Warm 24″x48″ Matte



Prati Borghini Warm 24″x48″ Matte



Wall: Prati Macchia Vecchia 24″x48″ Matte
Floor: Prati Macchia Vecchia 12″x24″ Matte

Backsplash: Prati Breccia Grey 24″x48″ Matte
Floor: Prati Brecchia Grey 24″x48″ Matte

Wall: Prati Breccia Grey 24″x48″ Matte
Floor: Prati Breccia Grey 24″x48″ Matte




Wall: Prati Breccia Grey 12″x24″ Polished
Sink Cabinets: Prati Breccia Grey 24″x48″ Matte

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1 & A137.3.

	SPECS	TEST METHOD	INDUSTRY STANDARD	OUR VALUES
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET
			OUTDOOR >0.55 WET	>0.55 WET 2CM & GRIP
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recordedpost cleaning.	NOT AFFECTED
	BREAKING STRENGTH GAUGED PORCELAIN	ASTM C1505	≥175 lbf	≥200 lbf
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes offreezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40% Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40% Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25% Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50% Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50% Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50% Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficent of friction may vary within and between product runs.

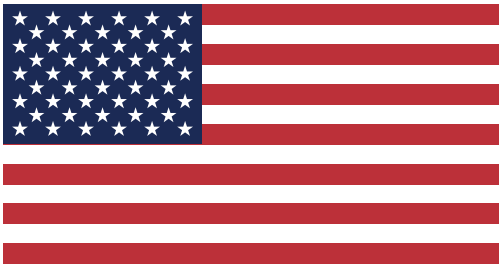

MADE IN USA

v. 01/25