

# METEOR

IMPACT SOCKETS LTD

hard hitting quality and service



Product Catalogue

2026

[www.meteorimpactsockets.com](http://www.meteorimpactsockets.com)



## **METEOR THE HIGH QUALITY IMPACT SOCKET SUPPLIER**

Meteor Impact Sockets Ltd is a UK family business founded in 2014, specialising in high-quality impact sockets and workshop consumables. Drawing on over 25 year's experience in the tyre and compressed air market sectors, the company supplies wholesalers and distributors across the UK and Europe offering a reliable and professional service.

Meteor Impact Sockets maintains a substantial stock of neutral-brand products in our UK logistics warehouse facility for fast order fulfilment. It can also offer private labelling and broker direct supply options if required. The company prides itself on product quality, responsive customer support, efficient logistics, flexible branding, and a dependable and consistent quality product supply, combining a professional reliability with the personal service and strong customer relationships of a family enterprise.



Hello I'm Jill, I take care of all the administration, customer service and finance, I work closely with our warehouse and logistic support team to make sure you're purchasing experience with Meteor is smooth, friendly and efficient and your order requirements arrive correctly and on time.

Jill McCall, Director



Hello I'm Pete, I look after all the sales, marketing and purchasing, I have over 25 year's management experience working in the tyre and compressed air consumable distribution markets. I endeavour to provide our customers with all the required quality products and competitive price support to suit their business. I am always happy to discuss how we can support your potential product and pricing requirements.

Peter McCall, Director

Telephone: +44 (0)1572 756387

Email: [sales@meteorimpactsockets.com](mailto:sales@meteorimpactsockets.com)

[info@meteorimpactsockets.com](mailto:info@meteorimpactsockets.com)

[www.meteorimpactsockets.com](http://www.meteorimpactsockets.com)



## CONTENTS:

### 1/2" DRIVE IMPACT SOCKETS (P4 - 5)

Regular Length - Deep Drive - Thin Wall - Alloy Wheel - Half Size Flip  
Special Profile - (Hub Nut P8)



### 3/4" DRIVE IMPACT SOCKETS (P6)

Regular Length - Deep Drive



### 1" DRIVE IMPACT SOCKETS (P7 - 9)

Regular Length - Deep Drive - Thin Wall - Disc-Lock - Square & Dual Budd  
Hub Nut/Truck



### IMPACT SOCKETS ACCESSORIES (P10 - 11)

Extension Bars - Adaptors - Reducers - Universal Joints  
Torque Wrench Adaptors - Breaker Bars



### IMPACT SOCKETS SETS (P12 - 14)

1/2" Deep Drive - Flip - Alloy Wheel - 1" Deep Drive



### AIR TREATMENT PRODUCTS (P16 - 18)

**dropout** Water Separator - Filter/Reg Lubricator (FRL)



### WORKSHOP AIRLINE PRODUCTS (P18 - 22)



Quick Release Couplings - Safety Couplings - Blow Gun - Hose  
Assemblies - Air Hose - Tyre Connectors - Hose Reels





# 1/2" DRIVE IMPACT SOCKETS

CR-MO WITH PHOSPHATE FINISH

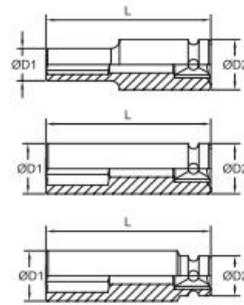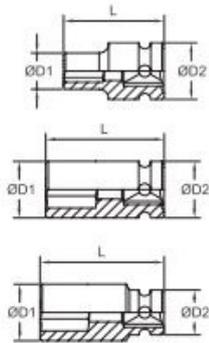

Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Weight (g)
RL01210	10	38	17.5	24	64
RL01211	11	38	18.5	24	65
RL01212	12	38	19.5	24	65
RL01213	13	38	20.5	24	67
RL01214	14	38	22	24	69
RL01215	15	38	24	24	75
RL01216	16	38	24	24	71
RL01217	17	38	26	26	90
RL01218	18	38	28	28	110
RL01219	19	38	28	28	100
RL01220	20	38	30	30	121
RL01221	21	38	30	30	117
RL01222	22	38	32	30	129
RL01223	23	38	34	30	141
RL01224	24	38	34	30	135
RL01226	26	38	36	30	142
RL01227	27	42	38	30	166
RL01228	28	42	40	30	191
RL01230	30	42	42	30	192
RL01232	32	44	44	30	213
RL01234	34	44	46	30	232
RL01236	36	48	49	30	275
RL01240	40	48	54	30	306
RL01241	41	48	56	30	327
RL01246	46	48	62	30	587

Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Weight (g)
DD01208	8	78	15	24	132
DD01209	9	78	16	24	137
DD01210	10	78	17	24	131
DD01211	11	78	18	24	132
DD01212	12	78	19	24	150
DD01213	13	78	20	24	143
DD01214	14	78	21	24	150
DD01215	15	78	24	24	157
DD01216	16	78	24	24	153
DD01217	17	78	26	26	182
DD01218	18	78	28	28	229
DD01219	19	78	28	28	220
DD01220	20	78	30	30	256
DD01221	21	78	30	30	246
DD01222	22	78	32	30	270
DD01223	23	78	34	30	318
DD01224	24	78	34	30	302
DD01225	25	78	36	30	329
DD01226	26	78	36	30	320
DD01227	27	78	38	30	358
DD01228	28	78	40	30	395
DD01229	29	78	42	30	434
DD01230	30	78	42	30	421
DD01232	32	78	44	30	458
DD01233	33	78	46	30	438
DD01234	34	78	46	30	436
DD01235	35	78	48	30	460
DD01236	36	78	49	30	480
DD01238	38	78	52	30	548
DD01246	46	100	62	44	845



## 1/2" DRIVE SPECIAL IMPACT SOCKETS


**1/2"**  
THIN WALL  
DEEP



6PT

For use only where width access restricted

CR-MO with phosphate finish



Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Weight (g)
TW01217	17	78	24	24	130
TW01219	19	78	26	26	164
TW01221	21	78	28	28	178

**1/2"**  
HALF-SIZE  
FLIP SOCKET




6PT

Double sided socket for use on Ford, Range Rover and Jaguar chrome plated wheel nuts

Short extension bar required for tool connection

CR-MO with phosphate finish



Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Weight (g)
FS185195	18.5/19.5	76	26	28	172
FS215225	21.5/22.5	76	30	32	235


**1/2"**  
ALLOY WHEEL  
DEEP



6PT

With nylon sleeve and insert to protect alloy wheel and nut

CR-MO Colour coded

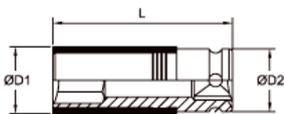

Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Weight (g)	Colour
IW01215	15	85	25	30	194	Dark Green
IW01217	17	85	27	30	214	Blue
IW01219	19	85	29	30	234	Gold
IW01221	21	85	31	30	254	Red
IW01222	22	85	33	32	289	Green

**1/2"**  
ALLOY WHEEL  
DEEP




SPECIAL PROFILE

Special profile for Mercedes, Maybach (MSP)

Kia & Hyundai (KSP) vehicles

CR-MO with nylon sleeve and insert


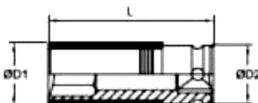


Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Weight (g)
MSP01217	17	84.5	27	30	220
KSP01221	21	84.5	31	30	230



## 3/4" DRIVE IMPACT SOCKETS

CR-MO WITH PHOSPHATE FINISH

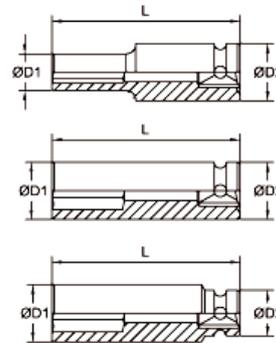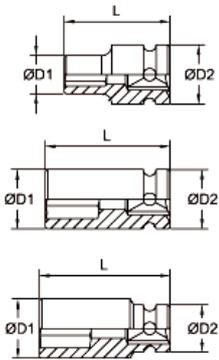



Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Weight (g)
RL03417	17	38	17	24	77
RL03419	19	38	19	24	80
RL03420	20	38	20	24	79
RL03421	21	38	21	24	81
RL03422	22	38	24	24	124
RL03424	24	38	26	26	125
RL03426	26	38	28	28	119
RL03427	27	38	30	30	119
RL03428	28	38	30	30	117
RL03430	30	38	34	34	138
RL03432	32	57	48	44	434
RL03433	33	57	50	44	482
RL03434	34	42	38	38	169
RL03435	35	42	42	38	179
RL03436	36	44	44	38	218
RL03438	38	57	56	44	542
RL03441	41	46	44	38	261
RL03445	45	38	24	24	125
RL03446	46	38	26	26	125
RL03450	50	38	30	30	117
RL03455	55	42	42	38	179

Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Weight (g)
DD03417	17	90	30	38	411
DD03418	18	90	31	38	404
DD03419	19	90	32	38	407
DD03420	20	90	33	40	453
DD03421	21	90	35	40	483
DD03422	22	90	40	40	596
DD03424	24	90	40	40	558
DD03425	25	90	41	41	558
DD03426	26	90	41	41	519
DD03427	27	90	41	41	503
DD03428	28	90	44	44	661
DD03429	29	90	46	44	699
DD03430	30	90	46	44	629
DD03432	32	90	48	44	705
DD03433	33	90	50	44	766
DD03434	34	90	52	44	810
DD03436	36	90	54	44	804
DD03438	38	90	56	44	846
DD03441	41	90	60	44	931
DD03445	45	90	66	44	1095
DD03446	46	90	66	44	1076
DD03450	50	90	71	54	1334



# 1" DRIVE IMPACT SOCKETS

CR-MO WITH PHOSPHATE FINISH

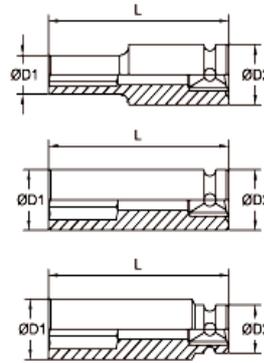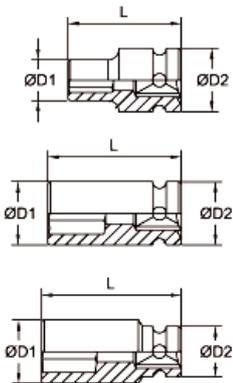


Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Weight (g)
RL10017	17	58	34	50	474
RL10019	19	58	36	50	476
RL10021	21	58	41	50	521
RL10022	22	58	41	50	507
RL10023	23	58	41	50	505
RL10024	24	58	41	50	498
RL10027	27	58	46	50	525
RL10028	28	62	46	50	457
RL10030	30	62	52	54	653
RL10032	32	62	52	54	622
RL10033	33	62	52	54	619
RL10034	34	62	52	54	599
RL10036	36	65	56	54	720
RL10038	38	65	58	54	738
RL10041	41	68	61	54	819
RL10046	46	72	68	54	990
RL10050	50	75	74	54	1166
RL10055	55	83	80	54	1412
RL10060	60	87	86	54	1688
RL10065	65	90	92	54	1933
RL10070	70	93	97	54	2089
RL10080	80	95	112	86	3608
RL10085	85	100	115	86	3810
RL10090	90	105	124	86	4296
RL10095	95	105	130	86	4933
RL100100	100	105	135	86	4407
RL100105	105	105	141	95	5500
RL100110	110	105	145	95	5400
RL100115	115	105	150	95	5550

Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Weight (g)
DD10019	19	90	36	50	679
DD10021	21	90	41	50	721
DD10022	22	90	41	50	754
DD10024	24	90	41	50	710
DD10026	26	90	43	50	723
DD10027	27	90	46	50	795
DD10028	28	90	46	50	765
DD10029	29	90	46	50	740
DD10030	30	90	52	52	956
DD10032	32	90	52	52	901
DD10033	33	90	52	52	886
DD10034	34	90	52	52	875
DD10035	35	90	52	52	838
DD10036	36	90	56	54	999
DD10038	38	95	58	54	1051
DD10040	40	95	60	54	1065
DD10041	41	95	61	54	1116
DD10042	42	95	64	54	1216
DD10046	46	95	68	54	1367
DD10048	48	100	70	54	1450
DD10050	50	100	74	54	1569
DD10052	52	100	75	54	1562
DD10054	54	100	78	54	1715
DD10056	56	100	81	54	1884
DD10058	58	100	84	54	2028




## HUB NUT & TRUCK IMPACT SOCKETS

CR-MO WITH PHOSPHATE FINISH



Part No	Size (mm)	L (mm)	D 1 (mm)	D 2 (mm)	Typical Application
DD01224	24	78	34	30	Volkswagen/Audi
DD01229	29	78	42	30	Hub Nuts & Axles
DD01230	30	78	42	30	Volkswagen/Audi
DD01232	32	78	44	30	DPW Drums/Volkswagen/Audi
DD01233	33	78	46	30	Hub Nuts various models
DD01235	35	78	48	30	Renault Hub Nuts
DD01236	36	78	49	30	BMW, Ford, Nissan, Porsche, Seat, Volkswagen
DD01238	38	78	52	30	Fiat 500 - Ford Ka







Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Typical Application
RL10080	80	95	112	86	For Scania front hub axle
RL10085	85	100	115	86	Commercial/SAF trailers
RL10090	90	105	124	86	Commercial various
RL10095	95	105	130	86	Merc, Discos, axle nut 10 wheel Scania cab
RL100100	100	105	135	86	Rear hub nut for Scania
RL100105	105	105	141	95	For DAF, Volvo
RL100110	110	105	145	95	Commercial/BPW trailers
RL100115	115	105	150	95	For wheel shaft cover Volvo



# 1" SPECIAL IMPACT SOCKETS

CR-MO WITH PHOSPHATE FINISH

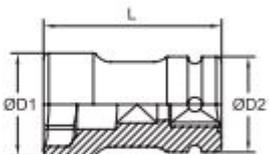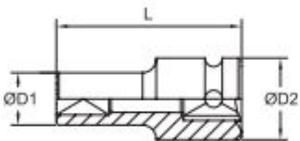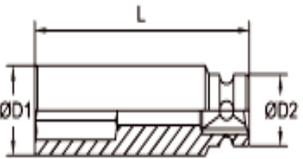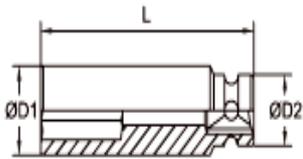

**1"**  
THIN WALL  
DEEP

**6PT**

Recommended for use only where width access restricted

Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Weight (g)
TW10024/1	24	90	38	54	639
TW10027/1	27	90	42.5	54	716
TW10028/1	28	90	42.5	54	689
TW10030/1	30	90	45	54	824
TW10032/1	32	90	47	54	813
TW10033/1	33	90	49	54	852
TW10034/1	34	90	50	54	780
TW10036/1	36	90	52	54	899
TW10038/1	38	90	54	54	900
TW10041/1	41	90	58	54	1005
TW10042/1	42	90	61	54	1022

**1"**  
DISC-LOCK  
T/W DEEP

**6PT**

These non-chamfered /flat faced sockets provide a positive connection to commercial disc lock wheel nuts

Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Weight (g)
DLK10034	34	90	54	54	784
DLK10038	38	90	58	54	905

**1"**  
BUDD WHEEL  
DEEP

**4PT**

Part No	Size	L (mm)	D1 (mm)	D2 (mm)	Weight (g)
BW10017	17mm	100	40	54	874
BW10019	19mm	100	42	54	906
BW10021	21mm	100	44	54	901
BW10022	22mm	100	44	54	952
BW10013/16	13/16"	100	44	54	945

**1"**  
DUAL BUDD  
DEEP

Part No	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	Weight (g)
DB1004121	41 x 21mm	96	58	54	1063



## IMPACT SOCKET ACCESSORIES

CR-MO WITH PHOSPHATE FINISH

1/2" - 3/4" - 1"

EXTENSION  
BARS



SPRING STEEL BALL TYPE




Part No	Size (drive)	Length (mm)	Width (mm)	Weight (g)
E012075	1/2"	75 (3")	24	142
E012125	1/2"	125 (5")	24	226
E012150	1/2"	150 (6")	24	266
E012250	1/2"	250 (10")	24	430
E012300	1/2"	300 (12")	24	510
E034150	3/4"	150 (6")	44	773
E034250	3/4"	250 (10")	44	1161
E034300	3/4"	300 (12")	44	1336
E034400	3/4"	400 (16")	44	1701
E100150	1"	150 (6")	54	1347
E100200	1"	200 (8")	54	1687
E100250	1"	250 (10")	54	2050
E100300	1"	300 (12")	54	2399
E100400	1"	400 (16")	54	3122

3/8" - 1/2" - 3/4" - 1"

ADAPTORS



SPRING STEEL BALL TYPE




Part No	Size (drive)	Length (mm)	Width (mm)	Weight (g)
A038012	3/8" f x 1/2" m	36	22	62
A012038	1/2" f x 3/8" m	38	25	61
A012034	1/2" f x 3/4" m	48	30	156
A012100	1/2" f x 1" m	50	30	257
A034012	3/4" f x 1/2" m	58	44	338
A034100	3/4" f x 1" m	63	44	437
A100012	1" f x 1/2" m	70	54	529
A100034	1" f x 3/4" m	70	54	528

1/2" - 3/4" - 1"

UNIVERSAL  
JOINTS



SPRING STEEL BALL TYPE



Part No	Size (drive)	Length (mm)	Width (mm)	Weight (g)
U012000	1/2"	63	30	157
U034000	3/4"	90	44	600
U100000	1"	115	54	1093



## METEOR WORKSHOP ACCESSORIES

1/2" - 3/4" - 1"

MALE TORQUE  
WRENCH ADAPTORS



SPRING STEEL BALL TYPE



Part No	Size (drive)	Length (mm)	Width (mm)	Weight (g)
AM012012	1/2"m X 1/2"m	40	22	98
AM034034	3/4"m X 3/4"m		19	
AM034100	3/4"m X 1"m	75	40	373

1/2"

HEAVY DUTY  
BREAKER BAR



WITH REPLACEMENT HEAD



Part No	Size (drive)	Length (mm)	Width (mm)	Weight (g)
FH012600	1/2"	600 (24")	33	1385

1/2"

REPLACEMENT  
HEAD



FOR FH012600



Part No	Size (drive)	Length (mm)	Width (mm)	Weight (g)
RK012FH	1/2"	55	33	165

At Meteor we endeavour to provide and support our customers with all the associated product requirements. If there are any products or sizes you would like us to add to our range please let us know and we will do our best to accommodate your request.



## 1/2" ALLOY WHEEL IMPACT SOCKET SETS

All Meteor Alloy Wheel Impact Sockets are manufactured using the best quality Chrome Molybdenum Steel (CR- MO).

Colour coded with nylon inserts and sleeve to help protect the alloy wheel and wheel nut .



### 1/2" 3PC SOCKET SET

ALLOY WHEEL  
DEEP



Part No	Contents
S012PW03	17mm, 19mm & 21mm



### 1/2" 4PC SOCKET SET

ALLOY WHEEL  
DEEP



Part No	Contents
S012PW04	15mm, 17mm, 19mm & 21mm.



### 1/2" 5PC SOCKET SET

ALLOY WHEEL  
DEEP



Part No	Contents
S012PW05	15mm, 17mm, 19mm, 21mm & 22mm



### 1" 7PC SOCKET SET

ALLOY WHEEL  
DEEP



Part No	Contents
S012PW07	15mm, 17mm, 19mm, 21mm, 22mm & 2 x Special profile sockets for Mercedes, Maybach, Kia & Hyundai vehicles



## 1/2" DEEP DRIVE IMPACT SOCKET SETS

CR-MO WITH PHOSPHATE FINISH



### 1/2" 3PC HALF SIZE SOCKET SET

For use on Ford, Range Rover and Jaguar chrome plated wheel nuts

FLIP SOCKETS  
DEEP



Supplied in blow moulded case

Part No	Contents
FSSET03	1 x 18.5/19.5 - 1 x 21.5/22.5 Flip socket & 1 x 3" Extension bar



### 1/2" 10PC SOCKET SET

DEEP



Part No	Contents
S012DD10/10-27	10mm, 11mm, 13mm, 14mm, 17mm, 19mm, 21mm, 22mm, 24mm & 27mm
S012DD10/11-24	11mm, 12mm, 13mm, 14mm, 16mm, 17mm, 19mm, 21mm, 22mm & 24mm



### 1/2" 15PC SOCKET SET

DEEP



Part No	Contents
S012DD15	10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 22mm, 24mm & 27mm + 1/2f x 3/8m & 3/8f x 1/2m adaptor

Meteor Impact Sockets are able to supply or prepare specific socket set option requirements on request.

Note: some options may be subject to minimum volume requirements and manufacturing lead times.

[www.meteorimpactsockets.com](http://www.meteorimpactsockets.com)



# 1" DEEP DRIVE IMPACT SOCKET SETS

CR-MO WITH PHOSPHATE FINISH



## 1" 4PC SOCKET SET

DEEP



Part No	Contents
S100DD04	27mm, 30mm, 32mm & 33mm
S100DD0436	27mm, 32mm, 33mm & 36mm



## 1" 5PC SOCKET SET

DEEP



Part No	Contents
S100DD05	24mm, 27mm, 30mm, 32mm & 33mm



## 1" 8PC SOCKET SET

DEEP



Part No	Contents
S100DD08	24mm, 27mm, 29mm, 30mm, 32mm, 33mm, 36mm & 38mm



## METEOR IMPACT SOCKETS

### Meteor supply sockets individually

Our sockets are however boxed in convenient sturdy corrugated boxes ideal for shelf storage. (1/2" sockets are boxed in 10's and 3/4" and 1" sockets are boxed in 6's)



### Meteor impact sockets are supplied neutral branded and size stamped.

The neutral branding helps the distributor with customer retention

The size stamping maintains the socket identification for the life of the product.



#### WHAT IS THE DIFFERENCE BETWEEN IMPACT SOCKETS AND STANDARD HAND TOOL SOCKETS

Regular hand tool sockets and some lower quality 1/2" drive impact sockets are usually made from chrome vanadium steel, (CR-V) which is structurally strong but generally more brittle, and therefore can be prone to breaking or shattering when exposed to shock and vibration.

**All Meteor Impact Sockets are manufactured for the professional using the highest quality chrome molybdenum steel (CR-MO), a ductile elasticity material that allows the socket to bend or stretch rather than shatter this also helps to avoid unusual deformation or damage to the tool's anvil and also helps to ensure safety in the workplace.**

Impact sockets can be recognised because of their black finish which is also designed to help protect against corrosion, generally electro plated on lower spec chrome vanadium products and phosphate/magnesium on the more professional and Meteor Chrome Molybdenum products.

The wall of an impact socket is also up to 50% thicker than that of a regular hand tool socket, making it suitable for use with pneumatic impact tools because the more mass the socket has, the more of an impact it will make against the fastener. In other words: **More mass = Greater impact**

## DROPOUT AIR TREATMENT WATER SEPARATOR

Dropout offers a unique patent protected in-line protection solution for your air supply where moisture free air at the point of use is required or essential.

Recommended for where there is a high concentration of water in the air supply.


Can be used as an effective lower cost alternative to dryers.

**Guaranteed to remove 99.9999% liquid (water & oil)**

**99% Solid particulate removal**

**Particulate removal to 1 Micron**

**Low maintenance, no replacement filter elements required**

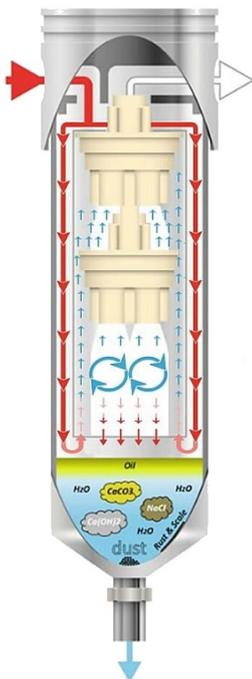

### HOW IT WORKS:

Dirty air enters the inlet port and is directed through our primary chamber where directional changes cause the air to spin removing heaviest content.

The air then passes through a small annulus causing the air to expand rapidly and cool.

The air then passes through the DCC (Dropout Clarification Chambers) where precision engineered venturis deflect the air causing particle coalescence.

Liquid then falls to the base of the unit where it is collected and drained.



NYLON



ALUMINIUM



STAINLESS

Part No	Material description	Port size	Outlet	CFM	LPM
DO300PA	Nylon	1/2"	Auto	11	300
DO300A	Aluminium	1/2"	Manual	11	300
DO600A	Aluminium	3/4"	Manual	21	600
DO900A	Aluminium	3/4"	Manual	32	900
DO2000A	Aluminium	1"	Manual	71	2000
DO4000A	Aluminium	1"	Manual	141	4000
DO300A/AD	Aluminium	1/2"	Auto	11	300
DO600A/AD	Aluminium	3/4"	Auto	21	600
DO900A/AD	Aluminium	3/4"	Auto	32	900
DO2000A/AD	Aluminium	1"	Auto	71	2000
DO4000A/AD	Aluminium	1"	Auto	141	4000
DO60S	304 Stainless steel	1/4"	Manual	2	60
DO150S	304 Stainless steel	1/4"	Manual	4	100
DO300S	304 Stainless steel	1/2"	Manual	11	300
DO600S	304 Stainless steel	3/4"	Manual	21	600
DO900S	304 Stainless steel	3/4"	Manual	32	900
DO1500S	304 Stainless steel	1"	Manual	64	1800
DO2000S	304 Stainless steel	1"	Manual	71	2000
DO4000S	304 Stainless steel	1"	Manual	141	4000

- 316 Stainless steel models also available

### AUTO DRAIN ATTACHMENTS

Part No	Material	Inlet
DOAD128	Aluminium	1/2"
DOAD228304	Stainless	1/2"





## METEOR WORKSHOP PRODUCTS

### METEOR FILTER/REGULATOR & LUBRICATOR

A metal bodied Air Treatment product offering good quality performance and filtration, providing clean compressed air at the point of use to help protect your air tool and inflation products.

Complete with wall bracket and pressure gauge

1/2" threaded inlet/outlet ports

Bayonet bowl release mechanism for easy clean

Locking pressure knob device

Pressure regulator range 0.5-0.85bar/7-12psi

Semi-automatic drain

5 micron filter

Max inlet pressure 14bar/210psi

Temp 5–60c



Part No	Inlet Port	Description
MFR-4000	1/2"	Filter/regulator with gauge
MFRL-4000	1/2"	Filter/regulator with lubricator and gauge

### METEOR SAFETY COUPLINGS

Push button 2 stage safety release mechanism for use with UK profile fittings

Push 1 to release compressed air, push 2 to safely release adaptor

Composite and steel alloy construction

Conforms to ISO4414

Max inlet pressure 15bar (225psi)

Interchangeable: PCL Airflow/Vertex/Safety, Rectus 19.



Meteor part no	Type	Material	Profile	thread size	thread type
MSFY-UK14F	Safety	Alloy/Comp	UK (PCL)	1/4"	Female Rp
MSFY-UK14M	Safety	Alloy/Comp	UK (PCL)	1/4"	Male R



## METEOR QUICK RELEASE COUPLINGS

### METEOR STANDARD COUPLING

Single handed application designed for fixed compressed air applications with UK profile fittings

Robust and hard wearing steel construction with stainless steel ball bearings and corrosive resistant zinc plated finish

Max airflow 43cfm @ 100psi - Max working pressure 200psi (14bar)

Interchangeable: PCL Airflow/Vertex, Rectus 19.



Meteor Part No	Coupling Type	Profile	Thread size	Thread type
MSTD-UK14F	Standard	UK (PCL)	1/4"	Female Rp
MSTD-UK14M	Standard	UK (PCL)	1/4"	Male R


### METEOR TRAILING HOSE COUPLING

Designed to prevent accidental disconnection and dirt penetration on trailing hose applications with UK profile fittings

Robust and hard wearing steel construction with stainless steel ball bearings and corrosive resistant zinc plated finish

Max airflow 43cfm @ 100psi - Max working pressure 200psi (14bar)

Interchangeable: PCL Airflow/Vertex, Rectus 19.

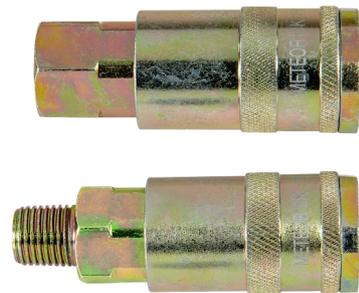

Meteor part no	Coupling Type	Profile	Thread size	Thread type
MTHS-UK14F	Trailing Hose	UK (PCL)	1/4"	Female Rp
MTHS-UK14M	Trailing Hose	UK (PCL)	1/4"	Male R
MTHS-UK10H	Trailing Hose	UK (PCL)	3/8" (10mm)	Hose tail

### METEOR UK PROFILE ADAPTOR PLUG

Suitable for all UK profile designed couplings

Hardened steel construction with zinc plating for corrosion protection.



Meteor part no	Type	Profile	Thread size	Thread type
MPA-UK14F	Adaptor/Plug	UK (PCL)	1/4"	Female Rp
MPA-UK14M	Adaptor/Plug	UK (PCL)	1/4"	Male R
MPA-UK10H	Adaptor/Plug	UK (PCL)	3/8" (10mm)	Hose tail



## METEOR WORKSHOP PRODUCTS

### METEOR AIR BLOW GUN

A ergonomically designed pistol grip blowgun with 10cm (4") conical nozzle

Supplied on Meteor branded presentation blister card

Manufactured with 1/4" male brass threaded inlet and brass valve

Lever controls variable air flow

Max working pressure 12bar (175psi)



Meteor part no	Type	Material	Nozzle	N/Length	Inlet thread
MPBG-02	Pistol Grip	Plastic	Conical	100mm (4")	1/4" Brass

### METEOR TWIN HOLD ON TYRE CONNECTORS

Suitable for the inflation of single or twin tyres

Supplied on a Meteor blister card

Open end connectors (Black handle) for use with hand held inflators and equipment with air trigger/lever

Closed end connectors (Red handle) for use with fixed/preset inflation machines and/or direct air supply options



Meteor part no	Type	Material	Valve size	Handle	Inlet thread
MTTC-01B	Open end	Steel/Brass	6.35	Black	1/4" Steel
MTTC-02R	Closed end	Steel/Brass	6.35	Red	1/4" Steel

Meteor have over 25 year's experience in the tyre and compressed air distribution markets with a network of world wide sourcing contacts we endeavour to provide our customers with the quality products and competitive price support to suit their business . We are always happy to discuss how we can support your potential product requirements.



## METEOR AIR HOSE PRODUCTS

Meteor air hose is a universal performer, UK manufactured in fully flexible alloy compound for use with compressors and air tools in the professional garage, tyre and workshop environment.

### METEOR STANDARD HOSE ASSEMBLIES

Professionally crimped with Meteor adaptor and THS coupling to prevent dirt ingress and accidental disconnection

Coloured strip insert offers better visual awareness

20 bar (300psi) Rubber alloy hose



Part No	Material	Hose length	Hose ID	Hose OD	Bar rating
MHAC1010	Rubber Alloy	10mtrs	10mm (3/8)	16mm	20 bar
MHAC1015	Rubber Alloy	15mtrs	10mm (3/8)	16mm	20 bar
MHAC1020	Rubber Alloy	20mtrs	10mm (3/8)	16mm	20 bar

Meteor manufacture additional compressed air hose assemblies to customers specifications, available in hose sizes up to 13mm ID and lengths up to 20mtrs with various coupling and fitting options.

### METEOR RUBBER ALLOY AIR HOSE

A black & yellow 20bar (300psi) working pressure rubber-alloy compressed air hose. Using a specially developed TPE compound, which offers all the benefits of traditional all-rubber hose.

Light in weight, so easier to handle.

Exceptional resistance to UV & ozone

Superb abrasion resistance

Reinforced synthetic textile

Oil mist resistant liner

BS EN ISO 5774 compliant



Available in 6mm (1/4"), 8mm (5/16"), 10mm (3/8") and 13mm (1/2") ID hose and lengths up to 100mtrs




## METEOR HOSE REELS

### WORKSHOP HOSE REEL

Our workshop reels are ideal for general air tool and tyre inflation applications, the workshop range includes two excellent hose reels at competitive prices

- Hard Wearing Polypropylene Case
- 180 Degree Pivoting Wall Bracket
- Hose Layering System on the MEHR-1510
- Black PVC hose
- Supplied complete with feed hose
- Brass Swivel Assembly
- Auto Lock

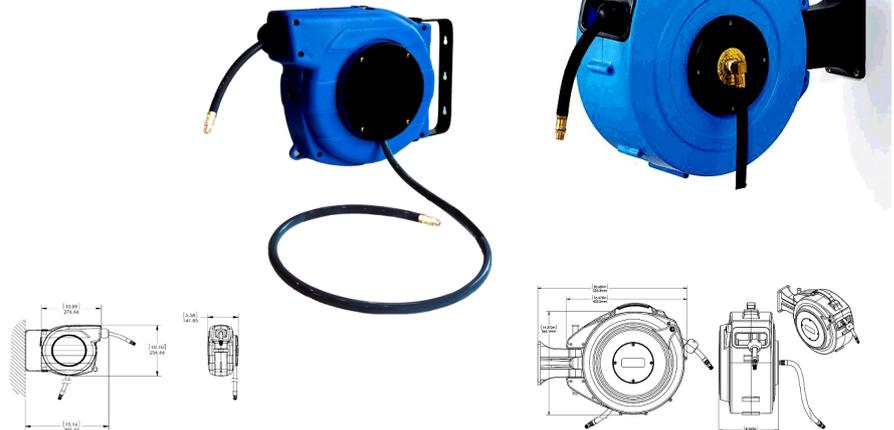

Part No	Description
MEHR-0908	Hose Air Reel with 9mtr of 8mm ID hose and 1/4" m end fitting
MEHR-1510	Hose Air Reel with 15mtr of 10mm ID hose and 1/4" m end fitting

### PREMIUM HEAVY DUTY HOSE REEL

Premium Heavy Duty UPVC Hose Reel for air or water applications and is ideal for tyre shops, general automotive and engineering applications and is also available in Hi-Vis versions for additional workshop safety.

- Premium Heavy Duty Polypropylene Case
- Pivoting Wall Bracket
- Black rubber 300psi (20bar) hose
- Supplied complete with feed hose
- High quality spring mechanism
- Brass swivel assembly with nitrile seals
- Auto Lock



Part No	Description
MPHR-2010	Air /water Hose Reel with 20mtr of 10mm ID hose and 3/8" m end fitting
MPHR-1512	Air /water Hose Reel with 15mtr of 12.5mm ID hose and 1/2" m end fitting



## Impact Socket Quick Reference Size Availability

Thin Wall (TW) versions available highlighted

Socket Size (mm)	1/2" Regular	1/2" Deep	3/4" Regular	3/4" Deep	1" Regular	1" Deep
8		DD01208				
9		DD01209				
10	RL01210	DD01210				
11	RL01211	DD01211				
12	RL01212	DD01212				
13	RL01213	DD01213				
14	RL01214	DD01214				
15	RL01215	DD01215				
16	RL01216	DD01216				
17	RL01217	DD01217	RL03417	DD03417	RL10017	
18	RL01218	DD01218		DD03418		
19	RL01219	DD01219	RL03419	DD03419	RL10019	DD10019
20	RL01220	DD01220	RL03420	DD03420		
21	RL01221	DD01221	RL03421	DD03421	RL10021	DD10021
22	RL01222	DD01222	RL03422	DD03422	RL10022	DD10022
23	RL01223	DD01223			RL10023	
24	RL01224	DD01224	RL03424	DD03424	RL10024	DD10024
25		DD01225		DD03425		
26	RL01226	DD01226	RL03426	DD03426		DD10026
27	RL01227	DD01227	RL03427	DD03427	RL10027	DD10027
28	RL01228	DD01228	RL03428	DD03428	RL10028	DD10028
29		DD01229		DD03429		DD10029
30	RL01230	DD01230	RL03430	DD03430	RL10030	DD10030
32	RL01232	DD01232	RL03432	DD03432	RL10032	DD10032
33		DD01233	RL03433	DD03433	RL10033	DD10033
34	RL01234	DD01234	RL03434	DD03434	RL10034	DD10034
35		DD01235	RL03435			DD10035
36	RL01236	DD01236	RL03436	DD03436	RL10036	DD10036
38		DD01238	RL03438	DD03438	RL10038	DD10038
40	RL01240					DD10040
41	RL01241		RL03441	DD03441	RL10041	DD10041
42						DD10042
45			RL03445	DD03445		
46	RL01246	DD01246	RL03446	DD03446	RL10046	DD10046
48						DD10048
50			RL03450	DD03450	RL10050	DD10050
52						DD10052
54						DD10054
55			RL03455		RL10055	
56						DD10056
58						DD10058
60					RL10060	
65					RL10065	
70					RL10070	
80					RL10080	
85					RL10085	
90					RL10090	
95					RL10095	
100					RL100100	
105					RL100105	
110					RL100110	
115					RL100115	

Meteor are constantly striving to meet our customer requirements so if there is any sizes or products you would like us to add to our range please let us know and we will do our best to accommodate your requests.

[www.meteorimpactsockets.com](http://www.meteorimpactsockets.com)



**METEOR IMPACT SOCKETS LTD**

**Tel: +44 (0)1572 756387**

**Email: [sales@meteorimpactsockets.com](mailto:sales@meteorimpactsockets.com)**

**[www.meteorimpactsockets.com](http://www.meteorimpactsockets.com)**



**hard hitting quality and service**

We reserve the right to amend or revise the specification of our products without prior notice.

Published March 2026. E. & O.E.