



IT'S WATER. REFRESHED.

# ZIP HYDROTAP G4

## THE ENVIRONMENTALLY RESPONSIBLE CHOICE

### World class air cooled technology

The following document provides information on the various options for the provision of adequate air circulation within the cupboard space

Providing correct air flow results in the following:

- Optimal performance
- Up to 53% reduction in energy consumption\*
- Reduced wear and tear on components
- Reduced maintenance
- Extended product life
- Reduced running costs




\*energy reduction compared with previous generation of products, refer to Sustainability Brochure for further details.



# HYDROTAP G4 CROSS-FLOW


## RECOMMENDED INSTALLATION

Proper air circulation must be provided for commercial HydroTap models that have chilled or chilled sparkling functionality. The HydroTaps unique Cross-Flow kit is supplied with the product and is designed to ensure optimum efficiency using forced air flow. If this kit cannot be fitted one of the other available options will need to be installed.

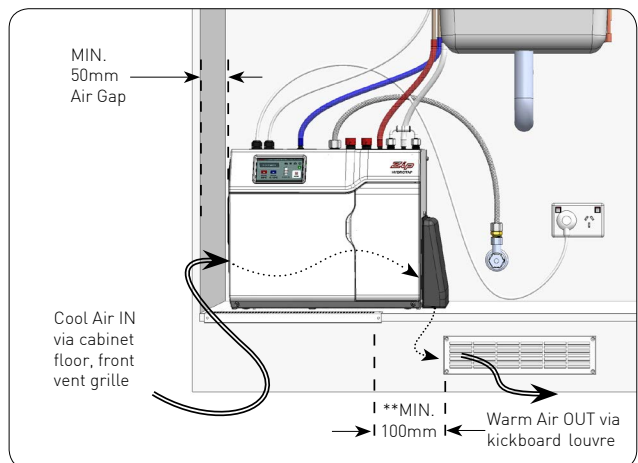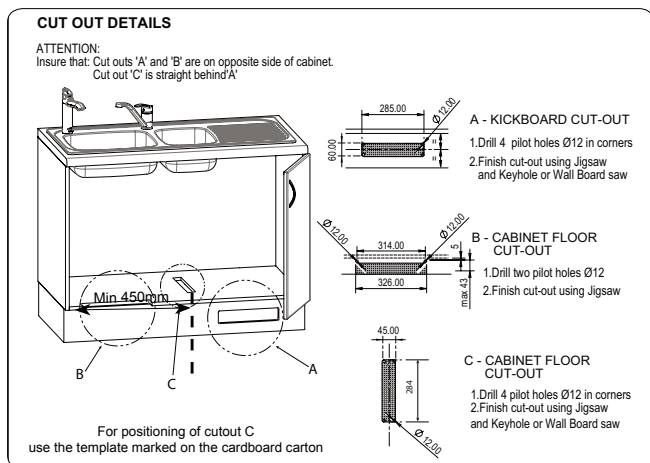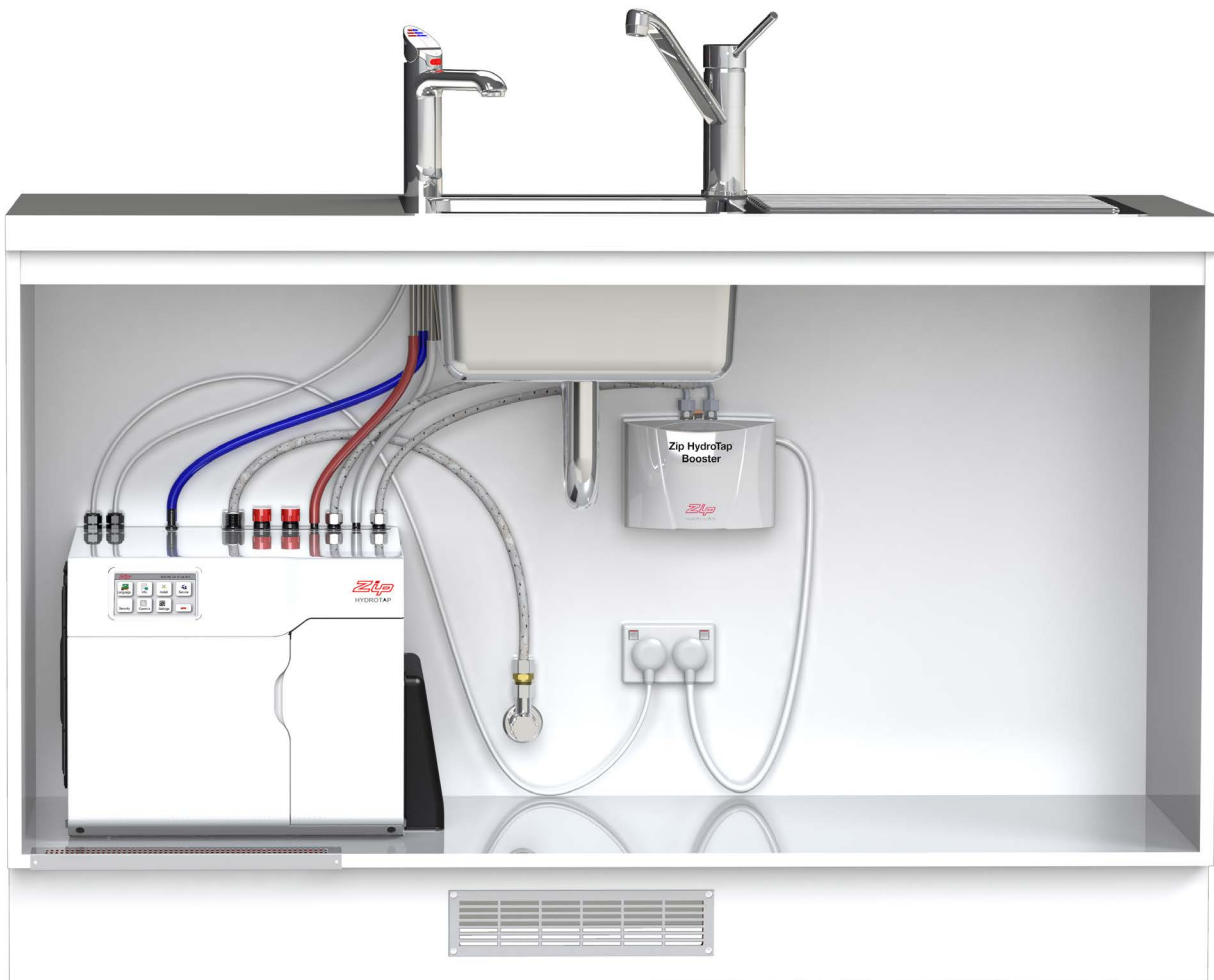


# HYDROTAP G4 CROSS-FLOW

## CHILLED SPARKLING

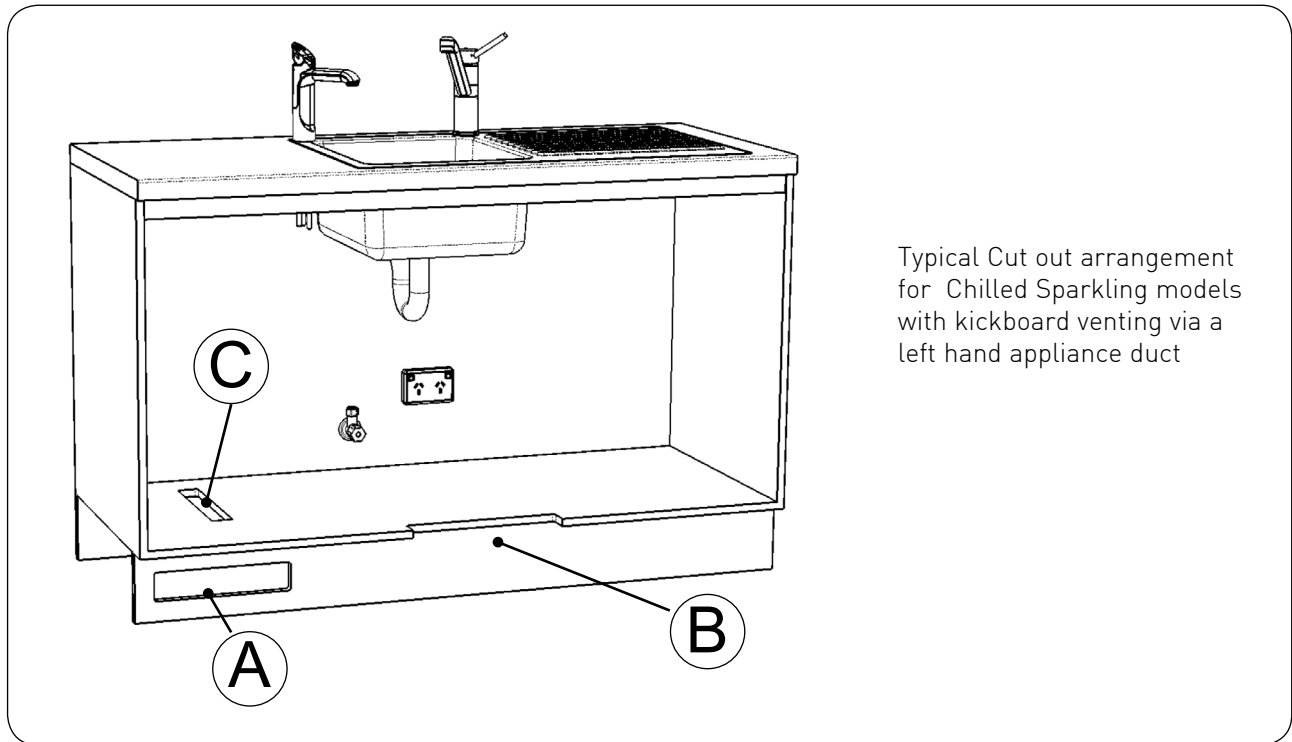

## BOILING CHILLED SPARKLING


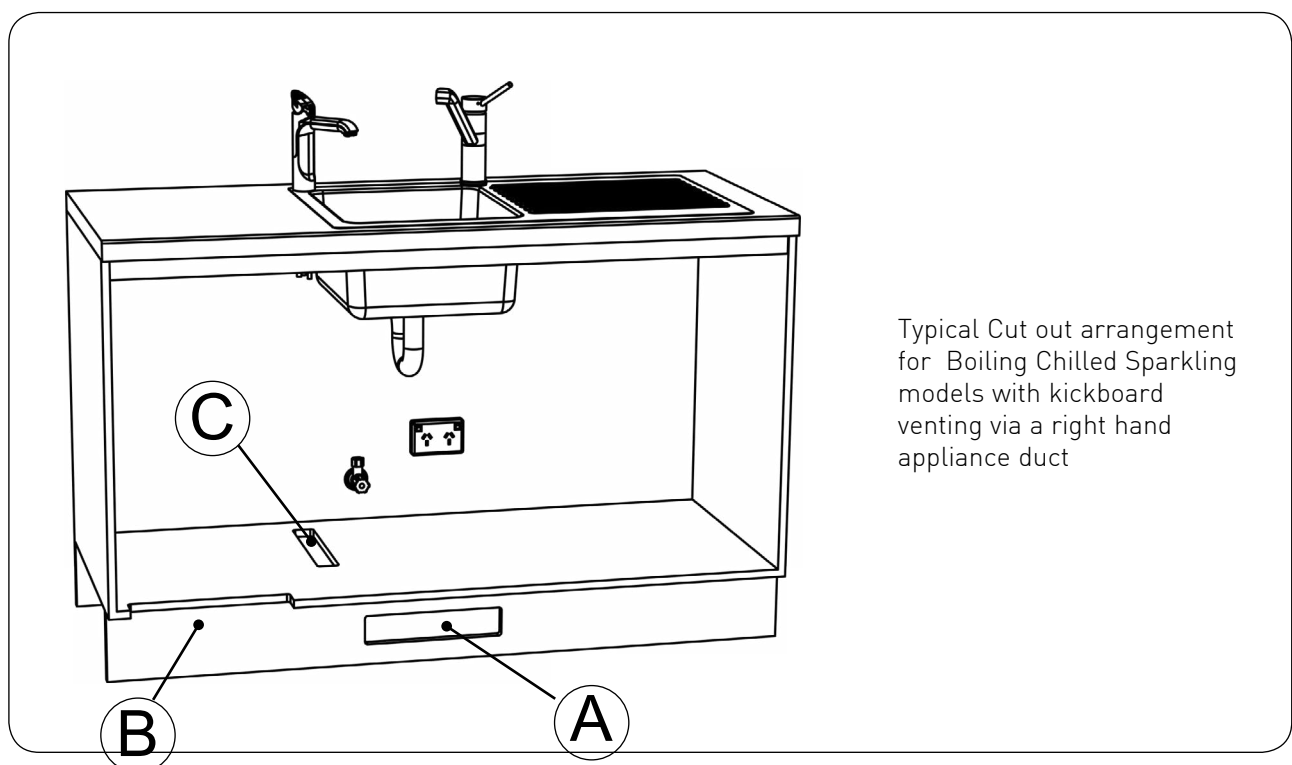


# HYDROTAP G4 VENT TRAY KIT

## INSTALLATION OPTION 1


**Installation showing the correct Air Flow using the vent tray.**

The Vent Tray Kit should be used to provide proper air circulation when the Cross-Flow kit which is supplied with commercial HydroTap models that have chilled or chilled sparkling functionality cannot be fitted. The HydroTap will only operate at its optimum efficiency if the recommended air flow is achieved.

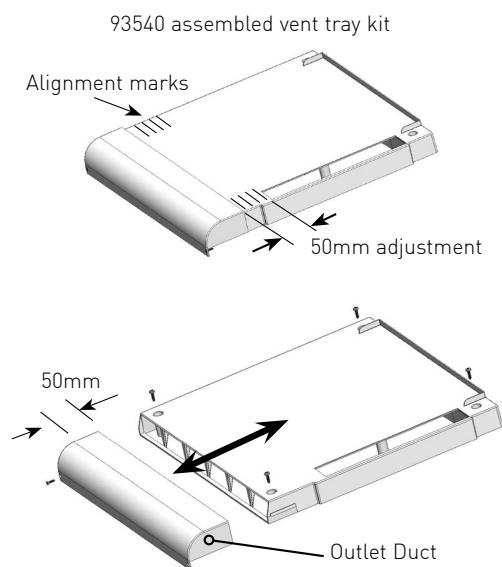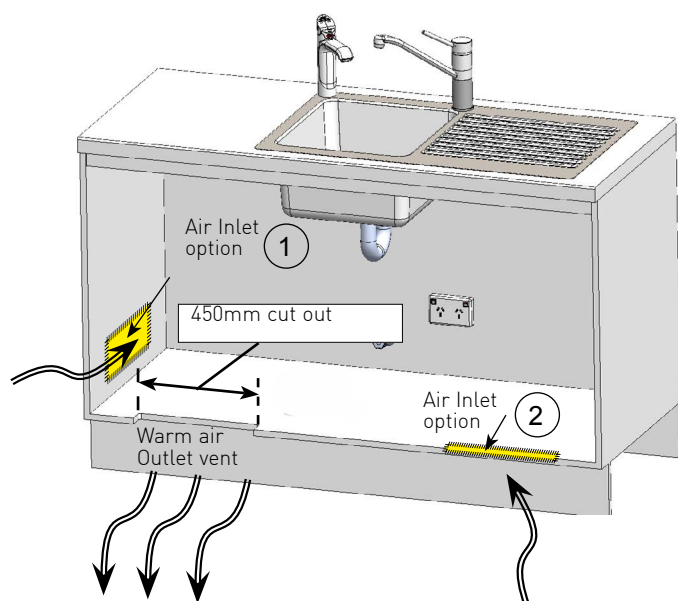


# HYDROTAP G4 VENT TRAY KIT



Vent Tray Kit for BC and BCS Commercial Models, part #93450 93540

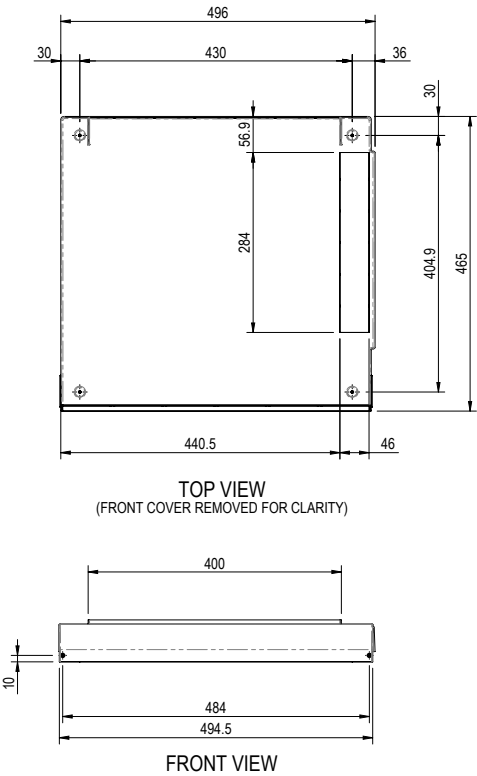


RHS VIEW

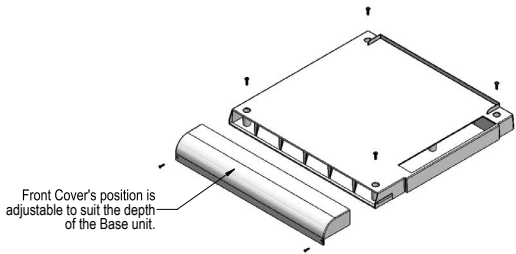

Vent Tray Kit for C and CS Commercial Models, Part #93541

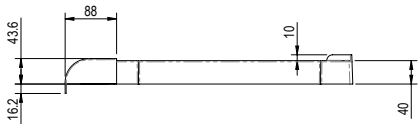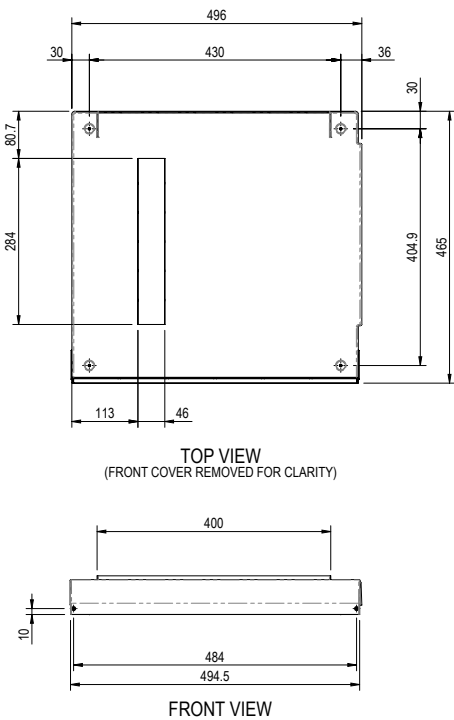

RHS VIEW

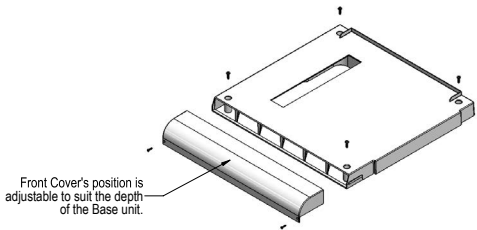



# HYDROTAP G4 DUAL EXHAUST FAN KIT

## INSTALLATION OPTION 2

Installation showing the correct Air Flow using the Dual exhaust Fan kit.

The Dual Exhaust Fan Kit should be used to provide proper air circulation when the Cross-Flow kit which is supplied with commercial HydroTap models that have chilled or chilled sparkling functionality cannot be fitted. The HydroTap will only operate at its optimum efficiency if the recommended air flow is achieved.

### Typical installation for BC and BCS models

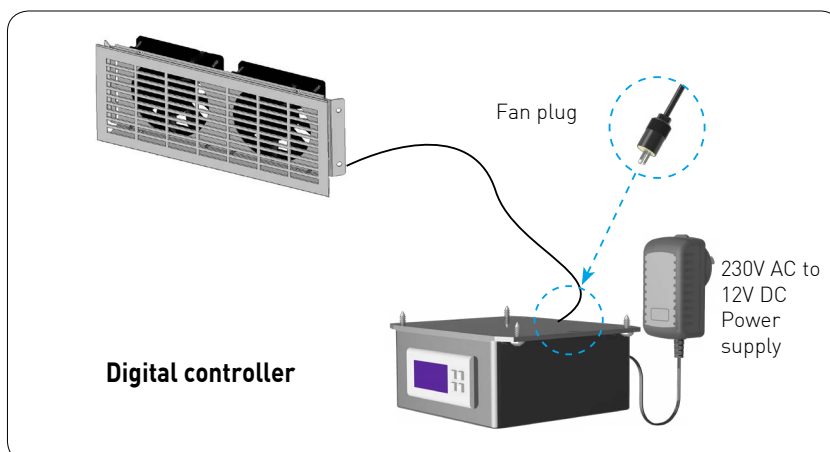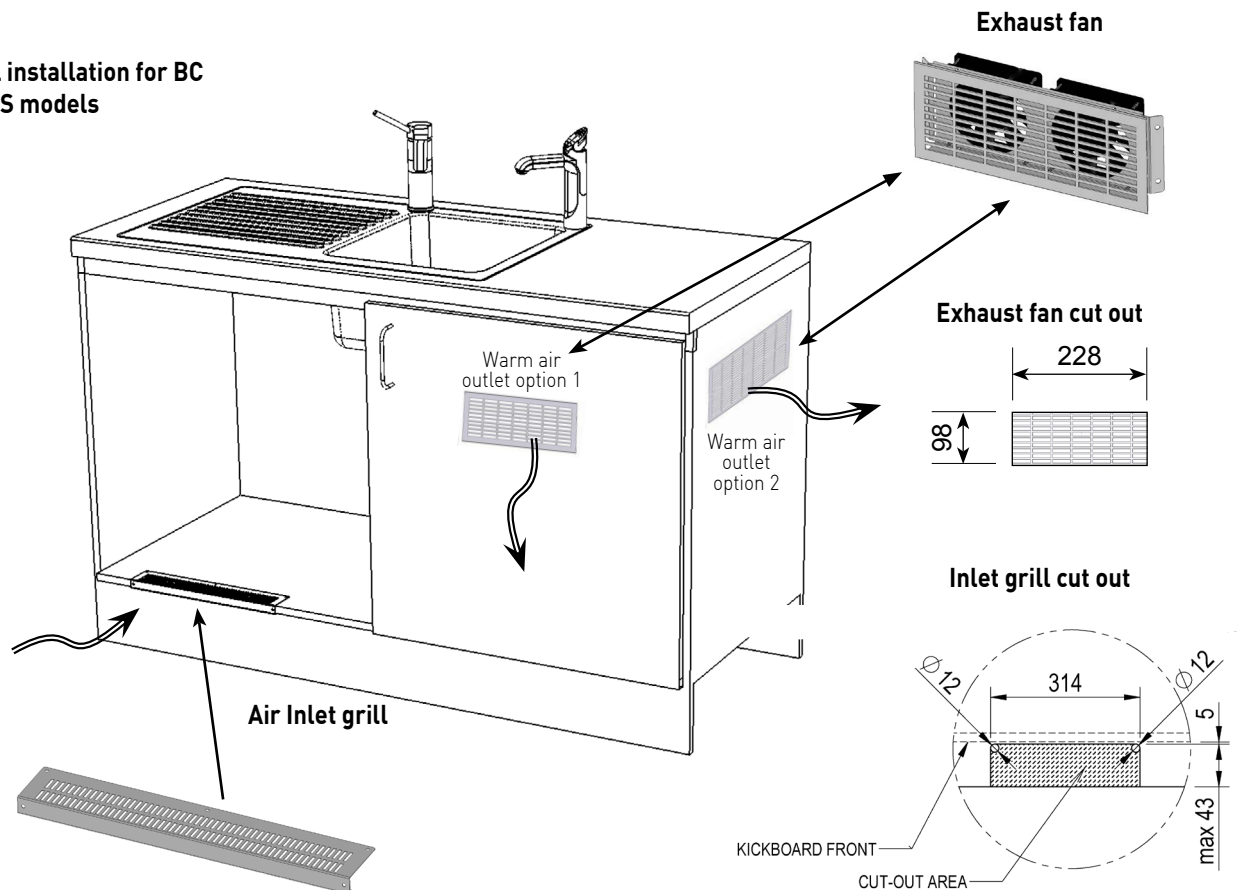

### Zip Accessories

Dual exhaust Fan kit, part #93156  
Dual exhaust fan kit with digital cupboard temperature controller, part 93159\*

\*some HydroTap models do not have the 2 pin DIN plug required to run the dual exhaust fan, in these instances you will require the digital temperature controller to operate the fan kit.





IT'S WATER. REFRESHED.

# ZIP HYDROTAP G4 BIM LIBRARY

Zip's BIM files deliver a range of benefits to help Architects, Contractors and Facilities Managers speed up the design and management of buildings wherever Zip products are specified.

**BIM library now available at <http://www.zipwater.com/products/specification-library>**

IT'S WATER. REFRESHED.

THE ZIP EFFECTPRODUCTSSPECIFYSUPPORT

Back to Product Selector
Print this pageShare via email

**PRODUCT SPECIFICATION VIEW**  
**ZIP HYDROTAP BCS 160/175**  
Boiling | Chilled | Sparkling  
Order Code: HT1762  

Zip HydroTap Boiling, Chilled, Sparkling, Filtered water appliance featuring a single under bench command centre including full colour interactive touch screen display with pin code protection, 2 boiling water safety modes, 3 energy saving modes including sensor activated "sleep when its dark", 0.2 micron water filtration and a refillable CO2 cylinder.

Go to Store

**SPECIFICATION REQUIREMENTS**

Tap	Zip HydroTap CLASSIC Tap (Chrome)
Capacity	160 Boiling cups and 175 combined Chilled Still or Sparkling Glasses per hour
Water Pressure	Min 172kPa - Max 500kPa
Water connection	12.7mm BSP
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Filter	Internal Zip GlobalPlus™ 0.2 micron filter
HydroTap Power Rating	2.3kW 220-240V 50Hz
Power Supply	1 x 10Amp GPD
CO2 Cylinder	1 x 2.6Kg CO2 cylinder (minimum room space required 100m³)
Product approvals	WaterMark, CE, ARC
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

**DOWNLOADS**

INSTRUCTION MANUALSPEC SHEET

QUICK GUIDEUSER MANUAL

BROCHURE

**FILTER PERFORMANCE:**

SPEC DETAIL FRONTSPEC DETAIL BACK

**2D FILES:**

DWGDXF

**3D FILES:**

3DSMAXOBJSKP

GSM

**DISCLAIMER**

1). Must be installed by a suitably qualified person in accordance with manufacturers instructions and with all relevant plumbing and electrical regulations.

2). In some hard water areas where mineral scale accumulation can become a problem, consideration should be given to the maintenance required. All Zip CommandCentre units come with an internal bypass to simplify the connection of an added high capacity filtration or water softening system.