

Optima 60





REIMAGINING RESIDENTIAL DOOR STANDARDS

Pioneer are the UK's exclusive distributors of the Gerda residential door range, delivering style and performance in equal abundance. Pound for pound, Gerda categorically outclass and outperform any other door. Choose the doors forged with strength, resilience and durability.

TABLE OF CONTENTS

INTRODUCTION	2
GERDA® OPTIMA 60	4
DOOR DESIGNS	6
HARDWARE CONFIGURATIONS	10
COLOUR OPTIONS	11
LOCK CYLINDER CONFIGURATIONS	12
LETTERPLATE OPTIONS	12
tedee POWERED BY GERDA®	13
INSPIRATIONAL IMAGERY	14



TEMPO · SNUB MILANO 4 B · WINCHESTER · INSERT BLACK · MONTREAL · BLOKTW200

ALUTHERM 60 DOOR FRAME


SOLID / GLAZED DOOR

U_D = 1.0 / 1.3 W/m²K

RC2 / RC3*

GERDA®

OPTIMA 60




Anti-burglary vertical bolt driven by the main lock




3 hinge guards



Hinges adjustable in two planes with caps matching fitting's colour



Adjustable keep enables smooth adjustment of the contact force of door and seals



ALUTHERM 60 aluminium frame



DOOR THICKNESS



3-bolt class 6 additional GERDA ZW 500 lock




3-bolt class 7 main GERDA ZW 2000 lock



Single key, AB system Class 6 lock cylinders




2-bolt auxiliary lock driven by the main lock



Low aluminium threshold



3 sides rebated



Cill, 4 sizes available: 120 mm, 150 mm, 180 mm, 230 mm




tedee smartlock + bridge

DIMENSIONS

WIDTH (MIN-MAX)**	840 mm - 1130 mm
HEIGHT (MIN-MAX)**	1950 mm - 2200 mm

* RC grade 2 or 3 according to EN1627 standard, depends on door size and design.
 ** Height dimensions shown above exclude sill (27 mm) & extensions but include a low threshold as standard.
 Optima widths and heights come in increments of 10 mm. Width and height range depends on design and colour of the door.



ALUTHERM 60 aluminium frame



NS1 MILANO 8



NS1B MILANO 8 B



NS2 MILANO 9



NS3 MILANO 10



NS4 MILANO 11



NS9 MILANO 12



NS9B MILANO 12 B




NS5 HANOVER 5



NS5B HANOVER 5 B



NS6 HANOVER 6

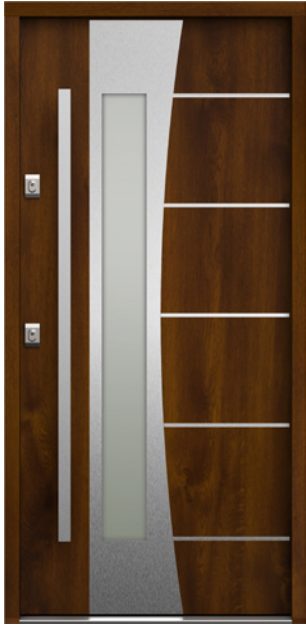

NS7 INNSBRUCK



W00 PLAIN



W00 PLAIN



W00 PLAIN



SNU MILANO 4



SNUA MILANO 4 A




SNUB MILANO 4 B



NT1 TURYN 1



NT2 TURYN 2

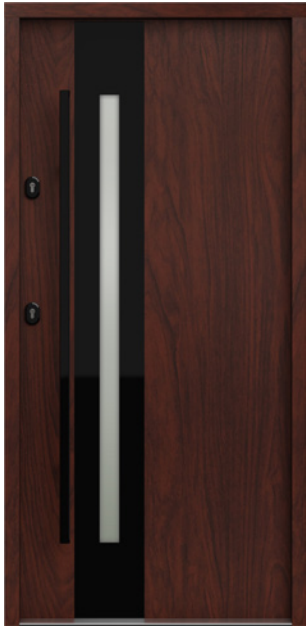

NT1B TURYN 1 B



NT2B TURYN 2 B



SOJ BERGAMO 2



SJ9 NICEA 9



SBE BERLIN 4



ST4 UPPSALA 1



ST4A UPPSALA 1 A



ST5 UPPSALA 2



ST5A UPPSALA 2 A



TML TOKIO 1



TMLA TOKIO 1 A



TMM TOKIO 2



TMMA TOKIO 2 A



ST8 RYGA



ST9 LUND



WBA ASPEN 1



TN7 ASPEN 2



TN7B ASPEN 2 B



SR3 TROMSO



SR4 TROMSO 1



SR5 TROMSO 2



WJ1 NICEA 5



W91 WERONA



W54 BARCELONA



W23 OLYMPIA



W9N WENECJA



W24 LIZBONA

DOOR COLOURS		MAX HEIGHT*
FSB	WHITE	2200 mm
FKZ	STEEL GREY	2100 mm
FKG	ANTHRACITE	2200 mm
FKF	DARK ANTHRACITE	2200 mm
FKC	BLACK	2100 mm
FRR	ALPINE WALNUT	2100 mm
FMA	MAHOGANY	2087 mm
FRB	BRAZILIAN WALNUT	2100 mm
FRP	LIGHT WALNUT	2200 mm
FDE	GOLDEN OAK	2200 mm
FDW	WINCHESTER	2200 mm
FDT	TURNER OAK	2087 mm
FEJ	LIGHT WENGÉ	2100 mm
DOOR RANGE		HEIGHT*
		WIDTH
TEMPO**	840 – 1130 mm	1950 – 2200 mm*
CLASSIC**	920 – 1030 mm	1950 – 2100 mm*

* Certain conditions apply.
** TEMPO and CLASSIC door series double-sided design as standard.

HARDWARE OPTIONS

HANDLE-HANDLE

BLOK TW200

BERGEN TW300

BERGEN TD200

MONTREAL
to combine with BLOK

AMSTERDAM
to combine with BERGEN

KNOB-HANDLE

BLOK TW200

BERGEN TW300

BERGEN TD200

BERGEN TW300
& BERGEN TD200

BLOK TW200
& BLOK TW200

HANDRAIL-HANDLE

MONTREAL

AMSTERDAM

HANDRAIL SIZES

1000 mm

1500 mm

1700 mm

1800 mm

Door height 2076 mm

HARDWARE COLOURS

PLATINUM ANODA

SILVER ANODA

BLACK ANODA

BRUSHED INOX
ONLY HANDRAILS

CILL OPTIONS

Cills with thermal compensation available in door colour.

27 mm

120 mm

27 mm

150 mm

27 mm

180 mm

27 mm

230 mm

DOOR COLOURS

WHITE
FSB

STEEL GREY
FKZ

ANTHRACITE
FKG

DARK ANTHRACITE
FKF

BLACK
FKC

ALPINE WALNUT
FRR

MAHOGANY
FMA

BRAZILIAN WALNUT
FRB

LIGHT WALNUT
FRP

GOLDEN OAK
FDE

WINCHESTER
FDW

TURNER OAK
FDT

LIGHT WENGÉ
FEJ

ANY COLOUR
EXTERNAL
ANY COLOUR
INTERNAL

INSERT COLOURS

BLACK RAL 9005

BRUSHED INOX

GLASS COLOURS

CLEAR

MATTE

MATTE
WITH CLEAR
STRIPES

REFLEX BROWN

REFLEX GRAPHITE

MIRA STAR MIRROR

LOCK CYLINDERS

PRO SYSTEM X



MAIN LOCK CYLINDER
KEY-KEY
CLASS 6
GEAR
ANTI SNAP



ADDITIONAL LOCK CYLINDER
KEY-THUMB TURN
CLASS 6
CAM
ANTI SNAP



CYLINDER COLOURS



AB KEY SYSTEM

A





2 x INSTALLER'S KEY
SINGLE KEY SYSTEM – ONE KEY OPERATES MAIN AND ADDITIONAL LOCK.
INSTALLER'S KEY „A“ OPERATES THE CYLINDER UNTIL „B“ KEY IS USED BY END USER.

B



5 x END USER'S KEYS
SINGLE KEY SYSTEM – ONE KEY OPERATES MAIN AND ADDITIONAL LOCK.
USE OF „B“ KEY DEACTIVATES INSTALLER'S KEYS. A SEALED OPAQUE BAG INCLUDES SET OF „B“ KEYS AND CODE CARD.

LETTERPLATE OPTIONS

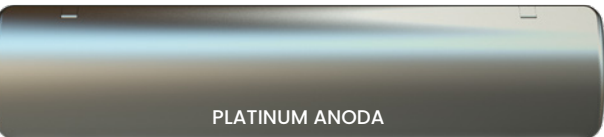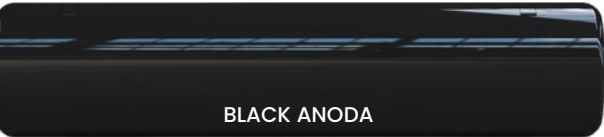

SIDE & TOP LIGHTS



SIDE LIGHT

WIDTH	300 - 900 mm
HEIGHT	1950 - 2200 mm

TOP LIGHT

WIDTH	840 - 2950 mm
HEIGHT	300-500 mm

Widths and heights come in increments of 10 mm.



TURN YOUR SMARTPHONE INTO A SMART DOOR LOCK

OPEN DOORS WITH YOUR SMARTPHONE

Open and close doors and monitor door lock status from any place around the world. With the automatic opening feature, you don't need to take your phone out from your purse or pocket. The lock will detect your presence and let you in. The self-locking feature works based on the same principle.

HIGH-PERFORMANCE BATTERY

Gerda engineers, in collaboration with the South Korean Research Institute, have developed a small dedicated high-performance battery. It powers the mechanism for six months of operation. And when in need of recharging, the lock will let you know an you can charge the battery overnight.

SAFETY WARRANTY

The lock actuating mechanism is an innovative, patented design developed by Gerda engineers. The software was created by Tedee IoT experts. An intuitive app lets you keep track of who and when has locked or unlocked the door. It also offers a virtual key allocation feature.

FEATURES & BENEFITS



CLASS 6 LOCK CYLINDERS INCLUDED

ANTI-BURGLARY TUMBLER LOCK INSERT. NEW LOCK INSERT DESIGN SECURED AGAINST 'LOCK BUMPING', WITH EFFECTIVE DRILL OPENING PROTECTION.

INSTALL A TEDEE LOCK

SLIDE THE LOCK ONTO A GERDA INSERT, ADJUST THE LOCK POSITION AND SECURE IT WITH ONE BOLT. INSTALLATION TAKES NO MORE THAN TWO MINUTES. INSPECT TO SEE WHETHER THE BOLTS SLIDE UPON TURNING THE KNOB.

INSTALL THE SMARTPHONE APP

DOWNLOAD THE TEDEE APP FROM APPLE STORE OR GOOGLE PLAY. SIGN UP AND ACTIVATE YOUR BLUETOOTH, LOCATION SERVICE AND INTERNET ACCESS. ADD YOUR LOCK AND ENTER THE ACTIVATION CODE.

CONNECT THE BRIDGE

FIND A FREE POWER SOCKET NEXT TO THE TEDEE LOCK AND PLUG THE BRIDGE IN. THIS WILL ENABLE YOU TO CONTROL THE LOCK OVER THE INTERNET FROM WHEREVER YOU ARE.



TEMPO · NS9 MILANO 12 · STEEL GREY · INSERT INOX · AMSTERDAM · BERGEN TW300



TEMPO · NTI TURYN 1 · GOLDEN OAK · INSERT INOX · MONTREAL · BLOK TW200



TEMPO · NS6B HANOVER 6 B · WHITE · INSERT BLACK · AMSTERDAM · BERGEN TW300



TEMPO · SBE BERLIN 4 · WINCHESTER · INSERT INOX · MONTREAL · BLOK TW200 · SIDE LIGHT P MATTE



TEMPO · SOJ BERGAMO 2 · DARK ANTHRACITE · INSERT INOX · MONTREAL · BLOK TW200 · SIDE LIGHT P MATTE

GERDA®

SUPERBLY ENGINEERED DOORS

PIONEER

DISTRIBUTORS OF GERDA® RESIDENTIAL DOORS



TEMPO · TN7 ASPEN 2 · DARK ANTHRACITE · INSERT INOX · MONTREAL · BLOK TW200

www.gerdadoors.co.uk

sales@gerdadoors.co.uk

Distributor

--