

SWE 18UF

MINI-SIZED EXCAVATOR



SUNWARD INTELLIGENT EQUIPMENT CO.,LTD.

Add: Sunward Industrial Park, No. 1335 Liangtang Road (E), Xingsha, Changsha, Hunan, China

E-mail: international@sunward.cc

Web: www.sunward.com.cn

SUNWARD EUROPE HEAVY INDUSTRY N.V

Add: Nijverheidsark 3,3580

Beringen,Belgium

Tel: (0032-011)434666

E_mail: eu@sunward.cc

Please read the manual book and maintenance book before operation, changes are periodically added to the information, and Sunward may change the products or services described in this book at any time without announcement. All rights of this manual book reserve to Sunward. SUNWARD Internal Use Only

SWE 2021

Engine netpower: 14kW

Machine weight: 1880kg



Zero tail swing




KUBOTA Engine

Conforming to the highest emission standards Stage5 (Europe) a TF4 (North America), preferred by compact type equipment. With low noise and vibration, it is popular among compact equipment and it is easy to maintain the main components



Hydraulic pilot traveling control


Breaker and boom swing are independently controlled by side pedals. Pedal control is added to reduce the labor intensity of the driver.

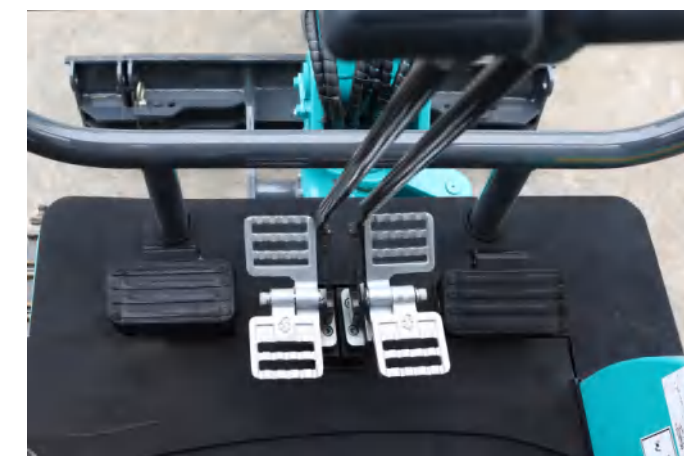

Configuration	Standard	Optional
Canopy	●	
Breaker pipes	●	
Auxiliary pipes	●	
Hydraulic quick hitch pipes	●	
Track	●	

Telescopic chassis

A simple single lever controls the width of chassis to as narrow as 990mm, allowing for smooth access to most openings and to as wide as 1320mm to enhance operation stability.

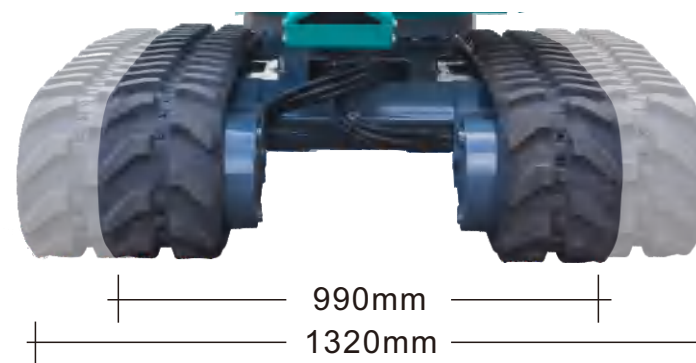

Easy to transport





Comfortable and safety operation

FOPS- and TOPS-certified canopy assembly protects the driver from falling objects/tip-over.




Advanced monitor



The rare high-end LED intelligent instrument not only displays the date, working hours, oil level and water temperature, but also integrates the functions of dual traveling speed switching, switch control of work lights and partial fault display.

■ List of Items Displayed

- Coolant temperature
- Working hours
- Oil pressure warning
- Charging indication
- Traveling mode
- Operating light
- Overheat warning
- Various indicator of the engine
- Fuel level
- Monitor working indicator
- Time

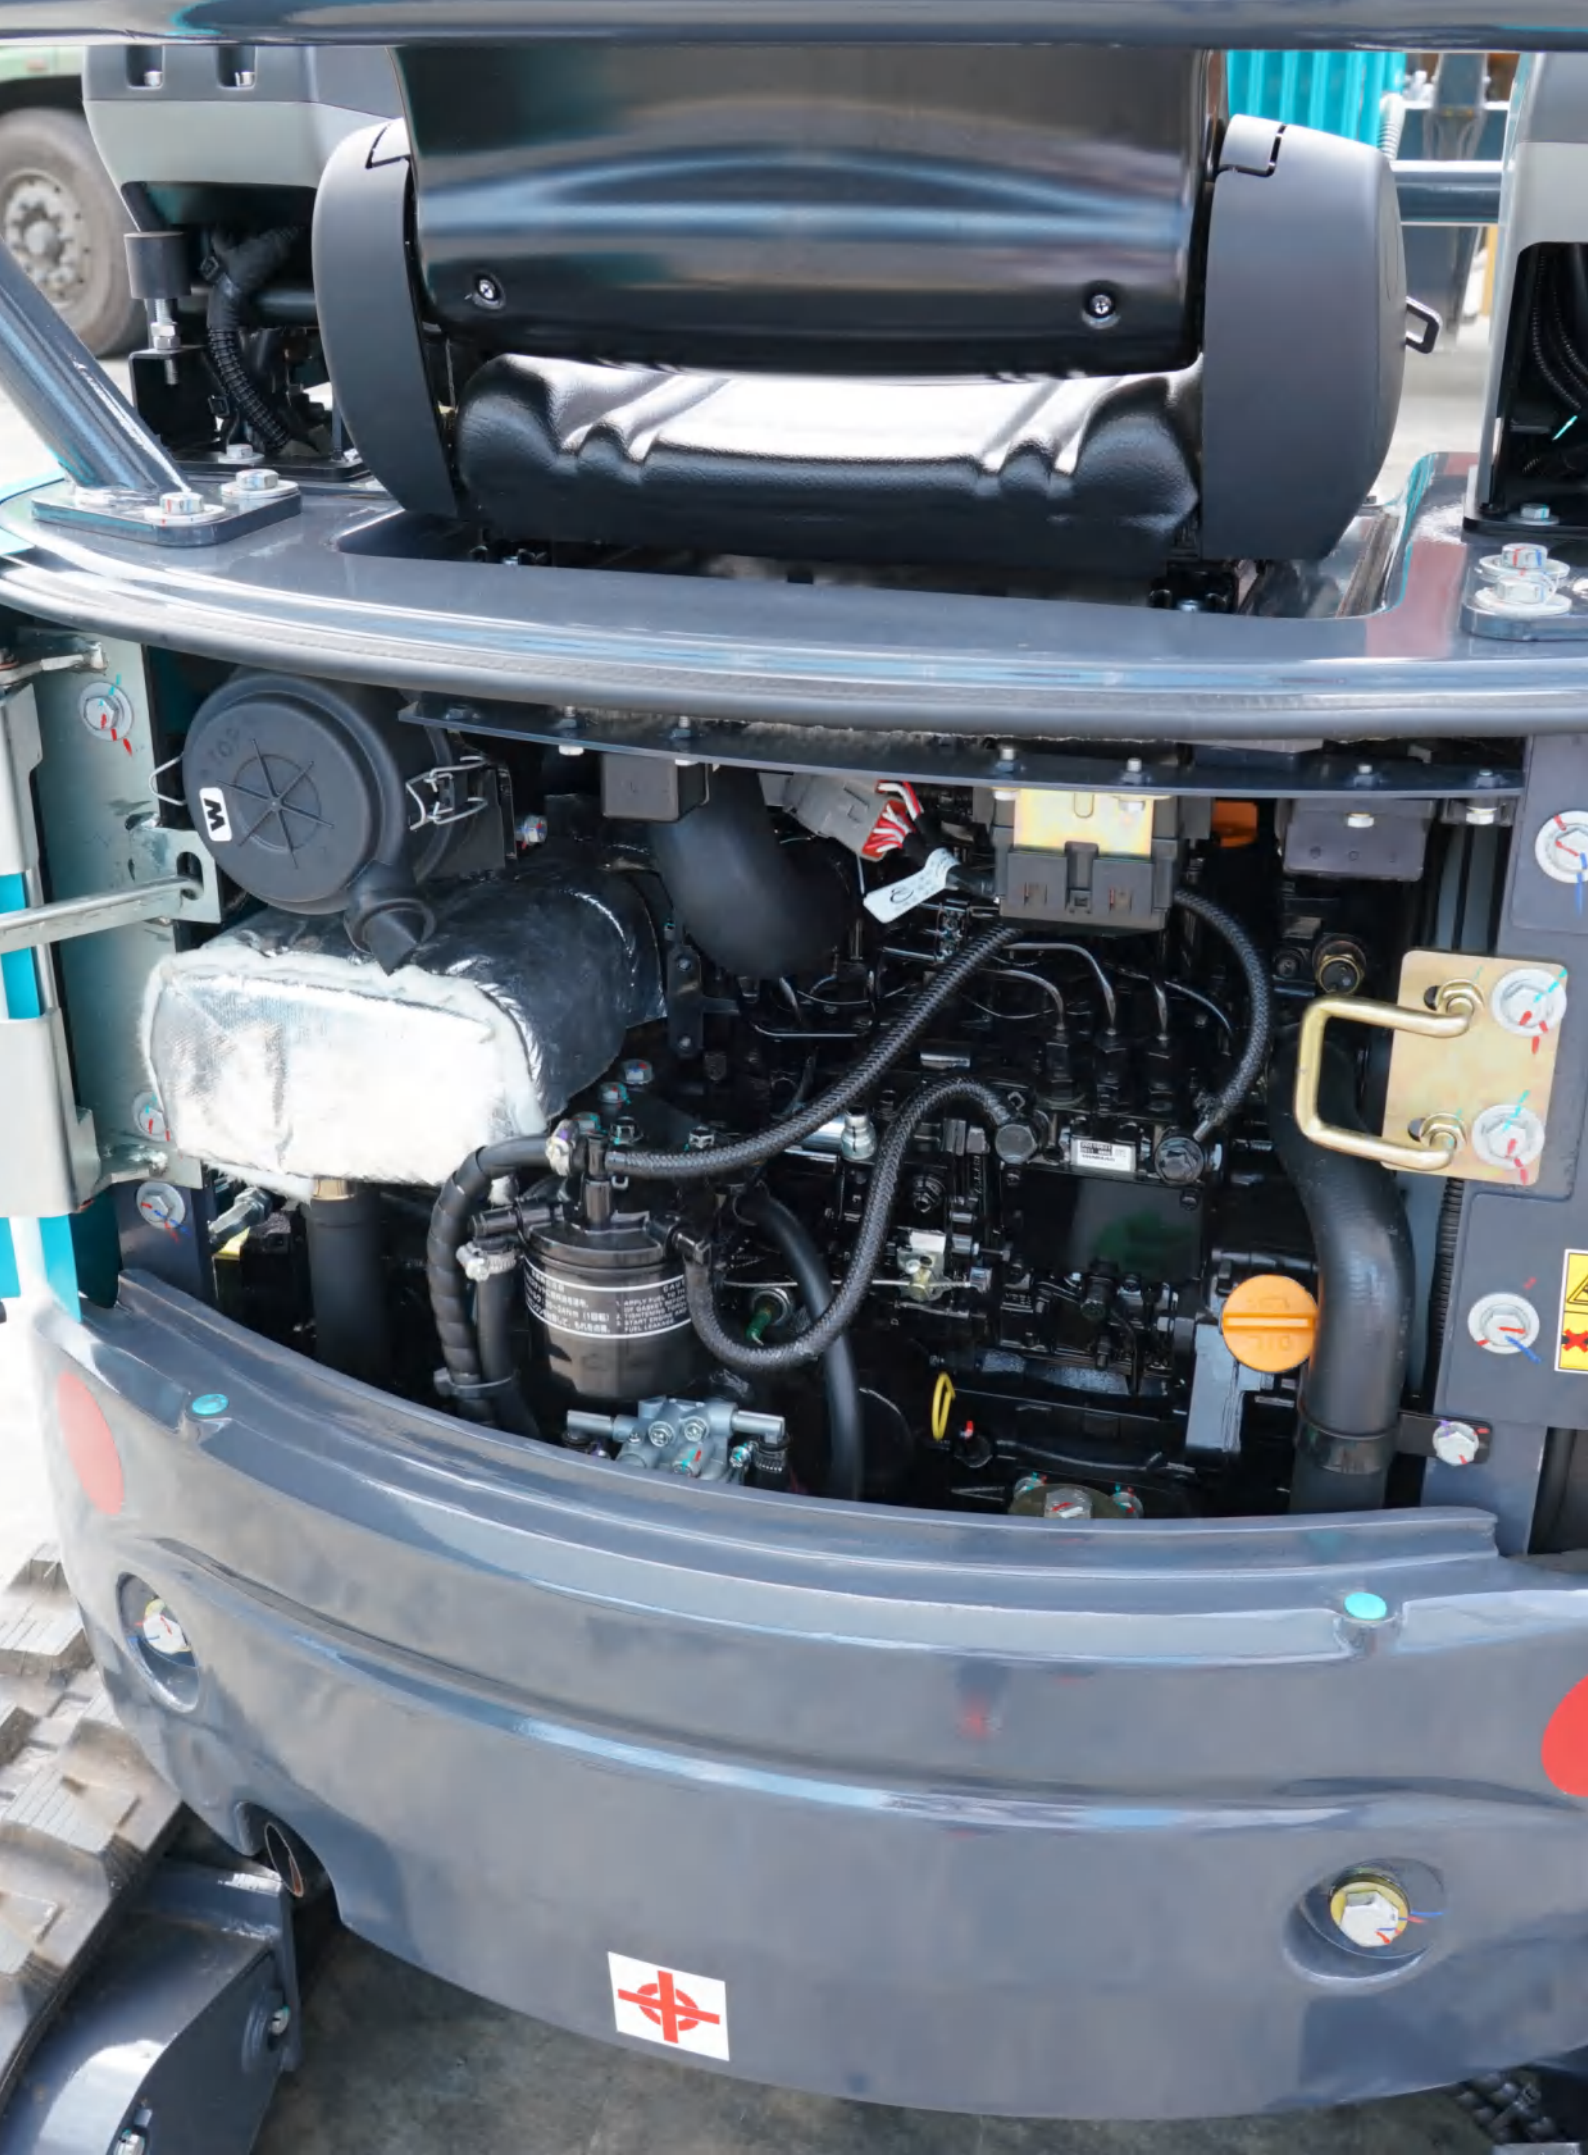

Easy service

Air filter element, engine oil filter element, oil-water separator, fuel filter and auxiliary water tank are easily accessible. The centralized lubrication system is easy and simple to maintain.



- | | | |
|------------------------------|---------------------------------------|---------------------------|
| A Air filter | B Auxiliary tank | C Oil-water filter |
| D Fuel filter | E Fuel feed pump | F Oil filter |
| G Engine oil tank cap | H Central electric control box | |




LED working light



**Safety switch of
pilot control**

**Steel protection
cover**

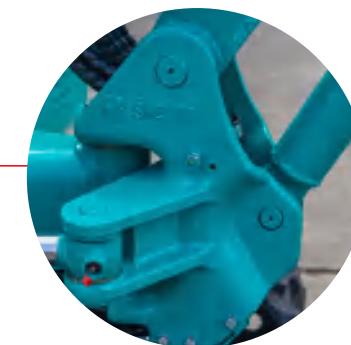

Cast slew connector



**Auxiliary pipes(Standard)
Hydraulic quick hitch pipes(Standard)**



Foldable dozer blade






Equipment

The standard and optional equipment varies from country to country. For more information, please contact with us.

Engine		Cab	
Oil filter	●	FOPS/TOPS Canopy	●
Fuel filter	●	Engine safety start system	●
Oil-water separator	●	Safety belt	●
Air filter	●	Suspension seat	○
Radiator	●		
Alternator	●	Working devices	
Auxiliary water tank	●	260 mm bucket	○
Electronic fuel feed pump	●	380mm bucket	●
Muffler	●	600 mm bucket	○
Hydraulic pilot control joystick	●	1000 mm bucket	○
Slewing parking brake system	●	Breaker pipeline	●
Traveling parking brake system	●	Auxiliary pipeline	●
Dual-speed traveling system	●	Hydraulic quick hitch pipeline	●
Auto traveling gear shifting system	●		
Light		Track	
Boom light	●	230mm steel track	○
Canopy light	●	230mm rubber track	●


● Standard equipment ○ Optional equipment

SWE18UF Technical Parameters				
Type of cab		Canopy		
Bucket capacity,std.	m³	0.04		
Bucket width	mm	380		
Machine weight	kg	1880		
Dimensions	Overall length	mm	3582	
	Overall height	mm	2350	
	Overall width	mm	990	
	Ground clearance	mm	160	
Engine	Brand		KUBOTA	
	Model		D1105	
	Displacement	L	1.1	
	Output	kW/rpm	14/2200	
Working ranges	Arm length	mm	950	1150
	Max cutting height	mm	3460	3525
	Max loading height	mm	2430	2500
	Max digging depth	mm	2210	2410
	Max vertical wall digging depth	mm	1550	1675
	Max digging reach	mm	3940	4120
	Boom swing angle(left/right)	°	71/49	
	Front swing radius	mm	1710	1745
	Tail swing radius	mm	680	
	Max digging force(Arm)	kN	11.24	9.83
	Max digging force(Bucket)	kN	22.7	
Track	Type	mm	Rubber track/steel track	
	Track Width	mm	230	
	Track Length	mm	1538	
Undercarrige	Length to center of Rollers	mm	1210	
	Lenhth to center of track	mm	760/ 1090	
	Travelling speed(High/Low)	km/h	3.5/2	
	Gradeability	°	30	
Swing speed		rpm	10	
Dozer size	Width	mm	990/1320	
	Height	mm	267	
	Lifting capacity(Height/Depth)	mm	216/270	
Hydraulic pumps			2 variable plunger pumps (2x21L/min) + 1 gear pump (13L/min) + 1 pilot gear pump (6L/min)	
Fuel tank capacity		L	24.6	
Hydraulic oil tank capacity		L	18.6	

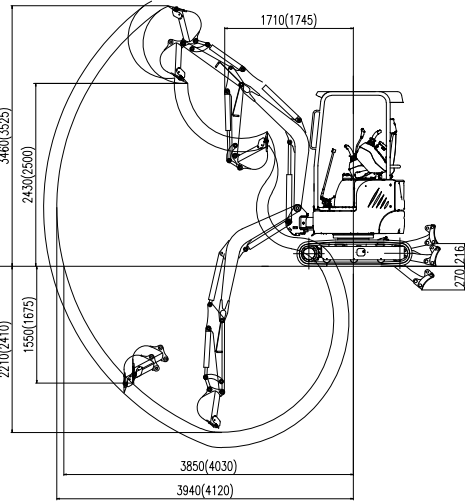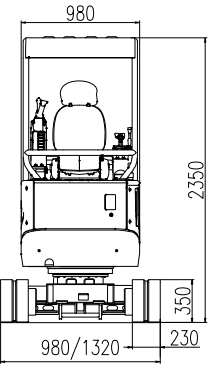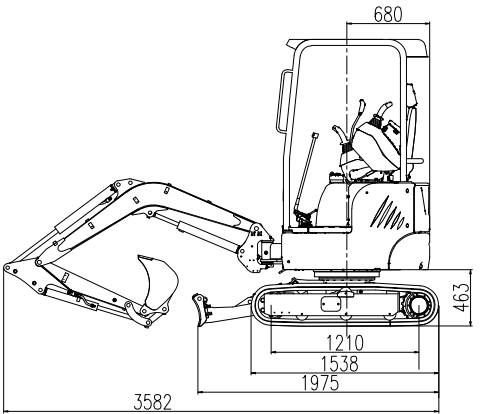

Load Capacity:

Lift Point Height	Lift Point Radius(MAX)		Lift Point Radius(3.0m)		Lift Point Radius(2.0m)	
	Over-front(kg)	Over-side(kg)	Over-front(kg)	Over-side(kg)	Over-front(kg)	Over-side(kg)
2.5m	243.60*	252.30*	243.60*	252.30*	-	-
2.0m	261.00*	252.30*	234.90*	247.95*	-	-
1.0m	269.70*	191.25	304.50*	300.15*	469.80*	482.85*
0m	308.85*	195.00	374.10*	225.00	617.70*	378.75
-1.0m	330.60*	225.00	330.60*	225.00	352.50*	352.50*

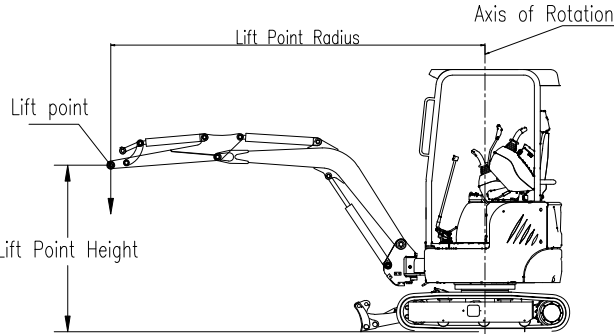

Notes:
1) Load with * is limited by hydraulic capacity and based on ISO 10567.Rated loads do not exceed 87% of hydraulic capacity.
2) Load without * is limited by tipping load and based on ISO 10567.Rated loads do not exceed 75% of tipping capacity.
3) The excavator bucket,hook,sling and other lifting accessories are not included in this table.