


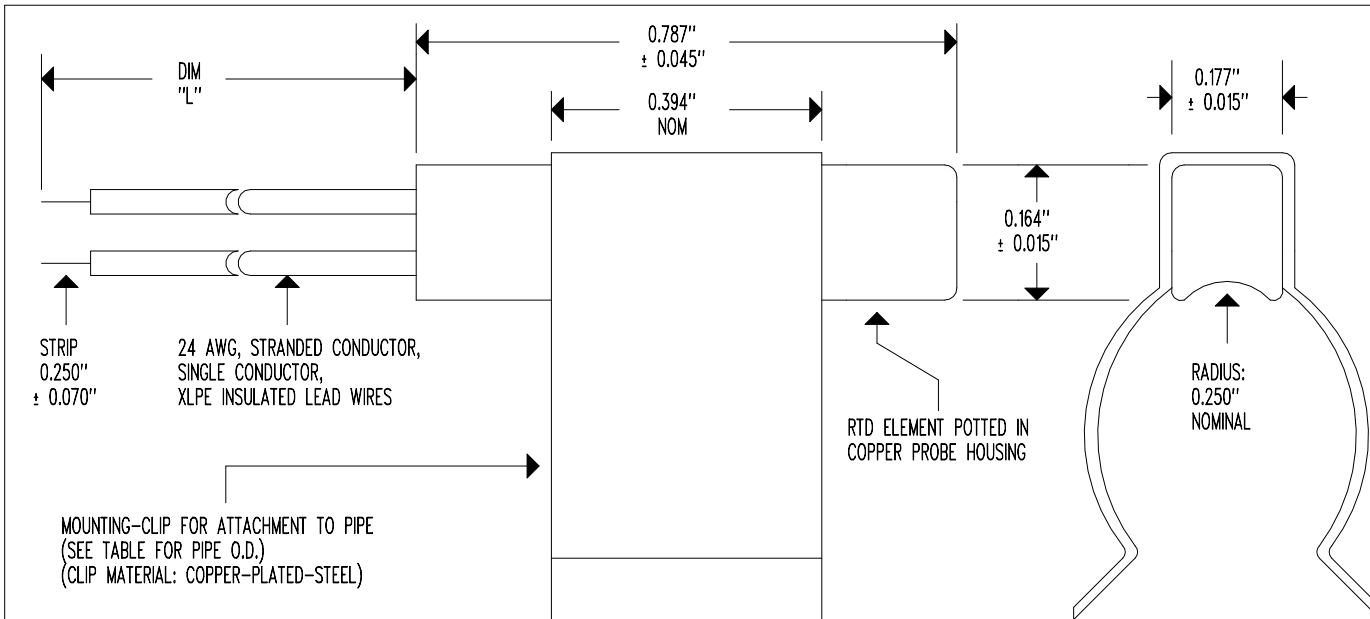

PART NUMBER	MOUNTING-CLIP FOR PIPE O.D. Ø
ERP10075-XXX-X-01-XXXX	0.250"
ERP10075-XXX-X-02-XXXX	0.312"
ERP10075-XXX-X-03-XXXX	0.375"
ERP10075-XXX-X-04-XXXX	0.500"
ERP10075-XXX-X-05-XXXX	0.625"
ERP10075-XXX-X-06-XXXX	0.750"
ERP10075-XXX-X-07-XXXX	0.875"
ERP10075-XXX-X-08-XXXX	1.000"
ERP10075-XXX-X-09-XXXX	1.250"
ERP10075-XXX-X-10-XXXX	2.000"
ERP10075-XXX-X-11-XXXX	NO CLIP

SPECIFICATIONS:


RTD ELEMENT TCR = 3,850 ppm/°C
 MAXIMUM TEMPERATURE RATING = +150°C
 MOISTURE RESISTANT PROBE ASSEMBLY
 ROHS COMPLIANT

DIM "L" TOLERANCE TABLE	
DIM "L"	TOLERANCE
<6.0"	± 0.500"
6.0" TO <12.0"	± 0.750"
12.0 TO 25.0"	± 6%
>25.0"	± 4%

REV	DESCRIPTION	DATE	APP
1	ADDED ADDITIONAL RESISTANCE & ACCURACY OPTIONS	02/15/2022	DD
0	INITIAL RELEASE	06/29/2020	DD
REVISION HISTORY			

EI SENSOR TECHNOLOGIES www.ei-sensor.com © COPYRIGHT P/N ERP10075-	RTD PROBE	
	DRAWN BY: DAN DANKERT	
	SCALE: NONE	LAYER: 0 OF 2
	REV: 1	DATE: 06/29/2020
This PROPRIETARY document is the property of EI Sensor Technologies. It is confidential in nature, non-transferrable and issued with the understanding that it is not to be traced or copied without permission, and is returnable on demand.		

ERP10075-XXX-X-XX-XXXX

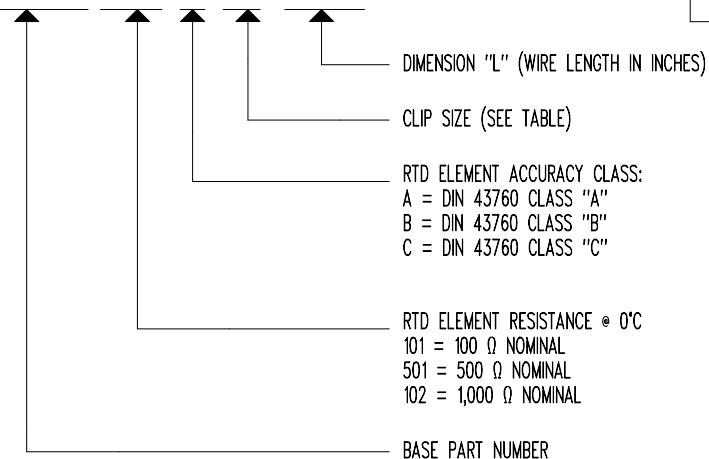

D = IEC 60751 F 0.15
 E = IEC 60751 F 0.3
 F = IEC 60751 F 0.6
 G = IEC 60751 F 0.1

201 = 200 Ω NOMINAL
 202 = 2,000 Ω NOMINAL
 103 = 10,000 Ω NOMINAL