



SUPER 88

The most versatile stand-on in the industry.

AVAILABLE DECK SIZES

88" RD



SUPER 88



Reinforced Impact Areas
1/4" thick steel wrapper added to the impact areas of the deck.

Adjustable Foot Platform
Spring loaded suspension platform for all-day comfort.

Vanguard Big Block™ Power
With oil guard option allowing for 500 hours between changes.


Transport Position
The wing decks are manually lifted using pull-out lift assist handles and gas spring assist.



Designed to Flex with Landscape
The deck flexes to contour with the mowing surface providing improved cut quality and scalping prevention.

Cut Height Adjustment
The center deck uses electric actuated height adjustment. The height of the wing decks is adjusted manually.

88" Width of Cut
The cut quality of a 54" deck plus the productivity of an 88" deck.

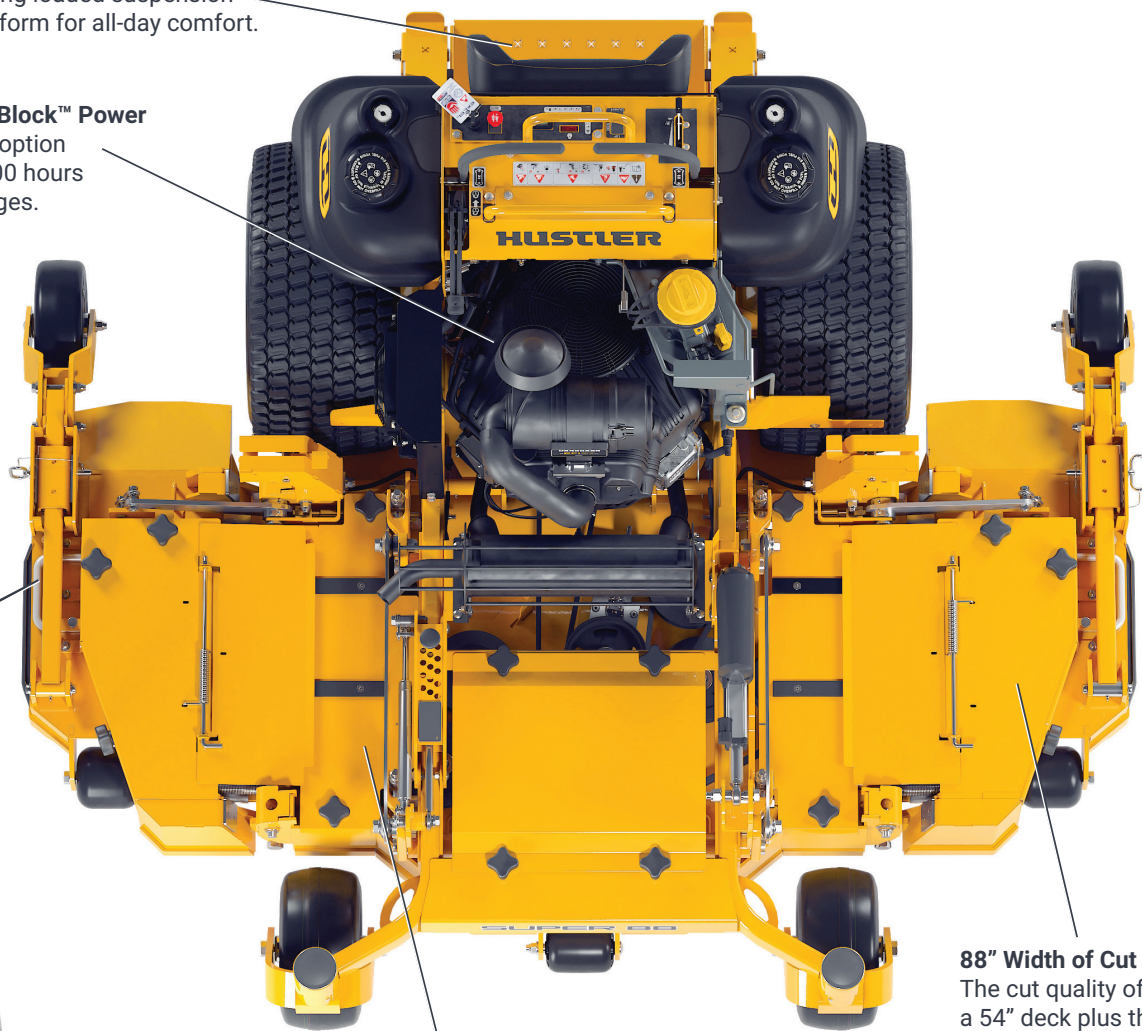

SUPER 88 STAND-ON MOWER



Adjustable Speed Controls
Helps with training
new operators.



76" Transport Width

Fits most trailers making it easy to transport from job-to-job.

SUPER 88 ACCESSORIES

- ▶ Mulch kit
- ▶ Mud Flap kit
- ▶ Light kit



SUPER 88

ENGINE	
Manufacturer	Vanguard Big Block™
HP	88" deck: 36HP - Big Block™ 88" deck: 37HP - Big Block™ EFI Oil Guard (Per SAE J1995)
Displacement	993cc
Cooling	Air cooled
Air Cleaner	Heavy duty air canister
Engine Warranty	5 year
DRIVE SYSTEM	
Type	Dual hydrostatic
Pumps	Hydro-Gear 21cc
Wheel Motors	Parker TG
Speed	Up to 10 mph
Parking Brakes	Hand operated drum brakes
DECKS	
Cutting Width	Rear-discharge: 88"
Cutting Heights	2" - 5.5"
Deck Lift	Center Deck: Electric actuator. Wings: Manual lift with pull-out lift assist handles
Depth	5.5"
Blades	5
Blade Length	18.50"
Blade Tip Speed	16,800
Spindles	Ductile cast iron with steel shafts and sealed ball bearings
Drive	Electric PTO clutch
Construction	Fabricated 11 ga. welded steel
Spindle Mounts	7 ga. doubler
Impact/Trim Areas	0.25 thick plate
Anti-scalp Wheels	Cast iron wing anti-scalp wheels with bearings with agriculture seals
CONSTRUCTION	
Frame	1.5" x 3" steel tubing
Engine Plate	7 ga.
Operator Platform	7 ga.
Front Axle	Fabricated with tapered roller bearings
Front Caster Wheels	Tapered wheel bearings and debris cap
Front Caster Forks	Fabricated 1/2" steel
Operator Pad	Bolstered operator pad
GENERAL	
Fuel Capacity	13.9 gallons
Front Tire	13 x 6.5 - 6
Drive Tire	26 x 12 - 12
Wing Tire	11 x 4 semi-pneumatic
DIMENSIONS	
Weight	2057 lbs
Height	50"
Length	84"
Width w/Chute Up	91" w/ wings down 76" w/ wings up
Tire Width	57"
Trim Side	18.8"
PRODUCTIVITY*	
Acres Per Hour	7.11

* Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain. ** Specifications are subject to change without notice.