



- 01. TECHNICAL SPECS
- 02. WARRANTY
- 03. COLOR CHART
- 04. OPTIONS





TECHNICAL SPECS







Layout 1 - with floor



Layout 2 - without floor

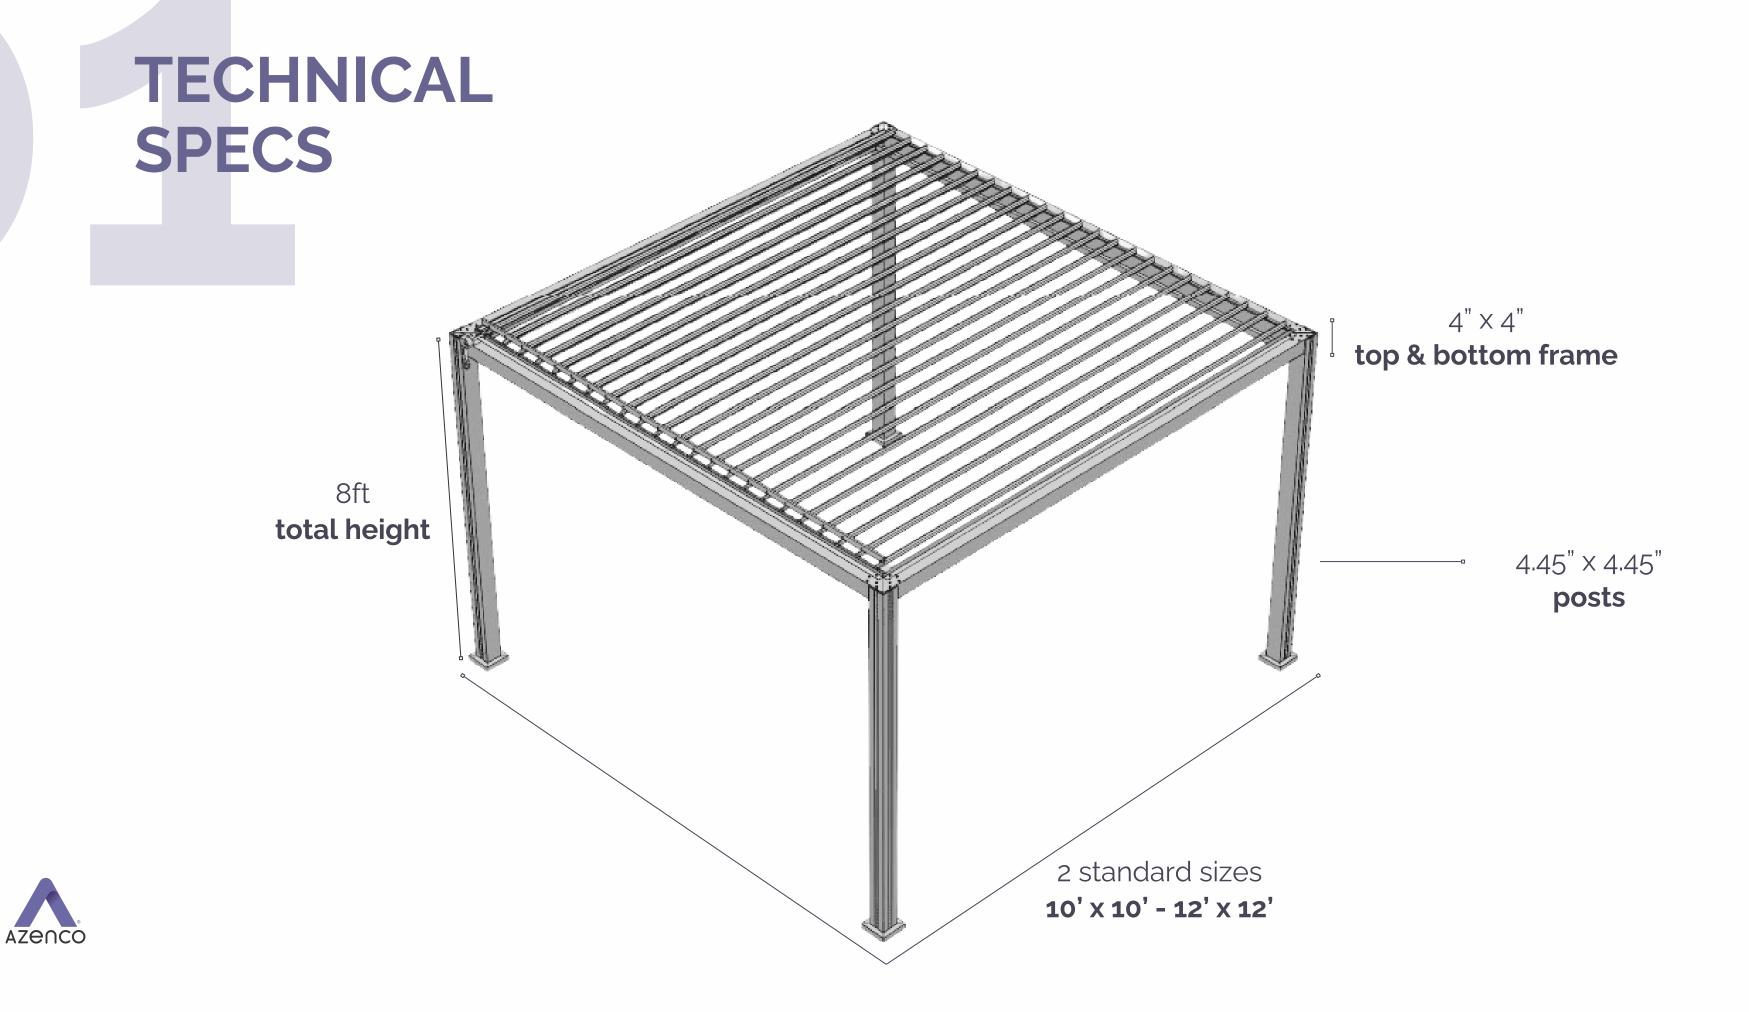

TECHNICAL SPECS

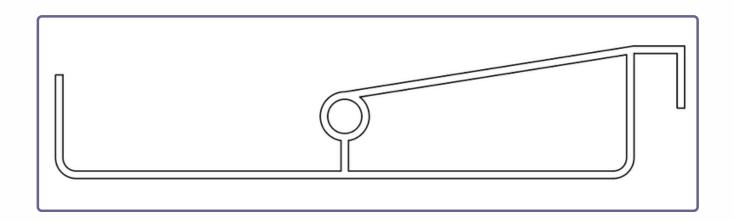


LOUVERS

Operate 90° Louvers opening direction is chosen at the installation Manual Louvered Roof only

ALUMINUM 6063-T6 Powder-Coated



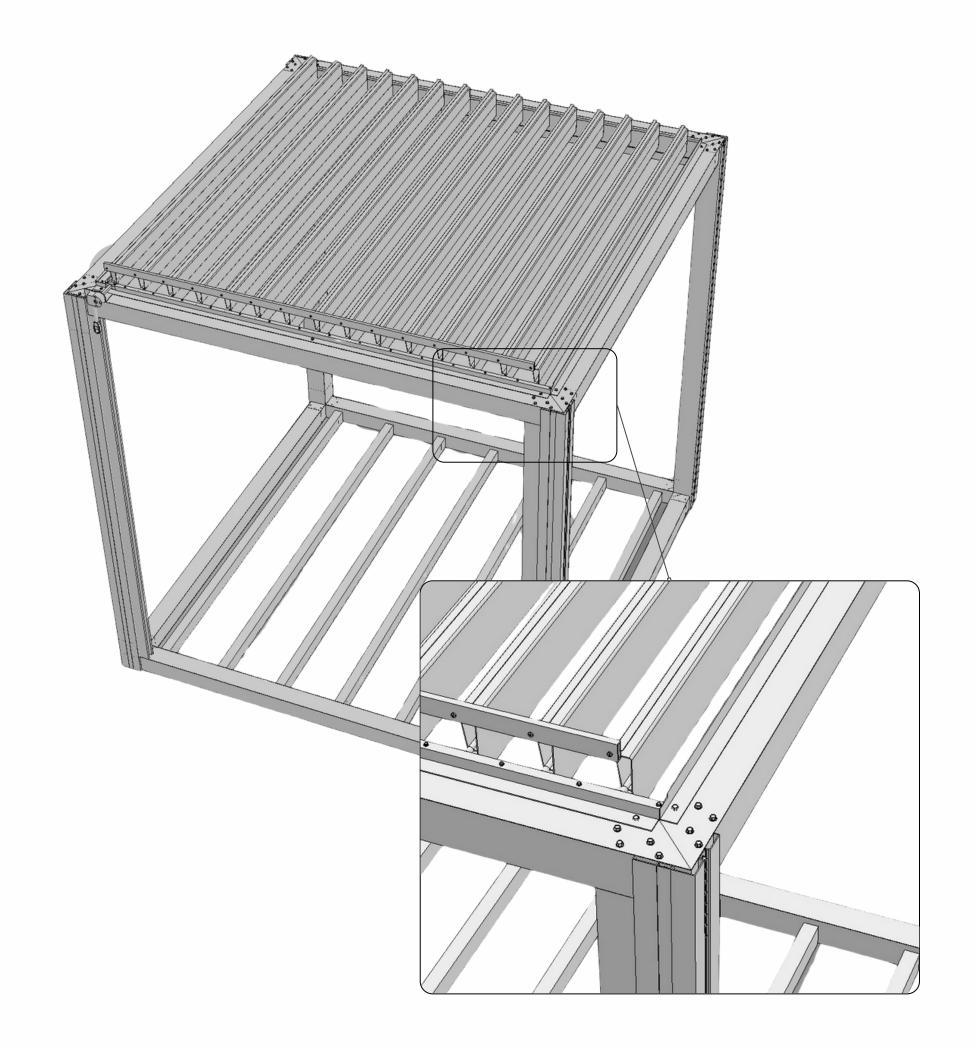

TECHNICAL SPECS

	10' X 10'	12' X 12'
WITH FLOOR FRAME	519 lbs	704 lbs
WITHOUT FLOOR FRAME	351 lbs	444 lbs
PRIVACY WALL	199 lbs	235 lbs



WARRANTY





15 years: aluminum structural components

COLOR CHART

WHITE MAT SMOOTH

SIGNAL WHITE

RAL 9003

AKZONOBEL - YA279QF CLASS 2 / AAMA 2604

3 to 4 weeks lead time







BLACK TEXTURED


EQUINOX BLACK

AKZONOBEL - YN325QF CLASS 2 / AAMA 2604

3 to 4 weeks lead time

→ with white louvers



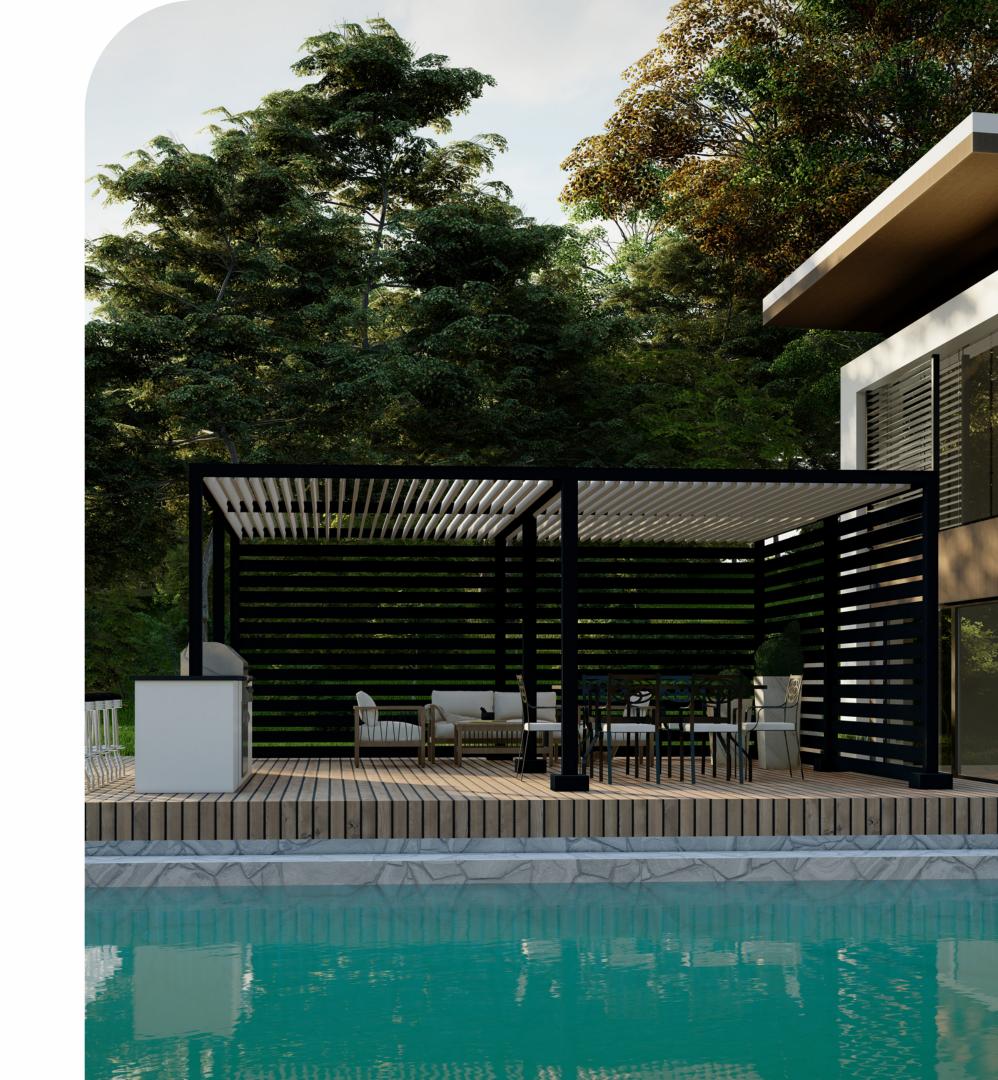






PRIVACY WALL

(fixed)

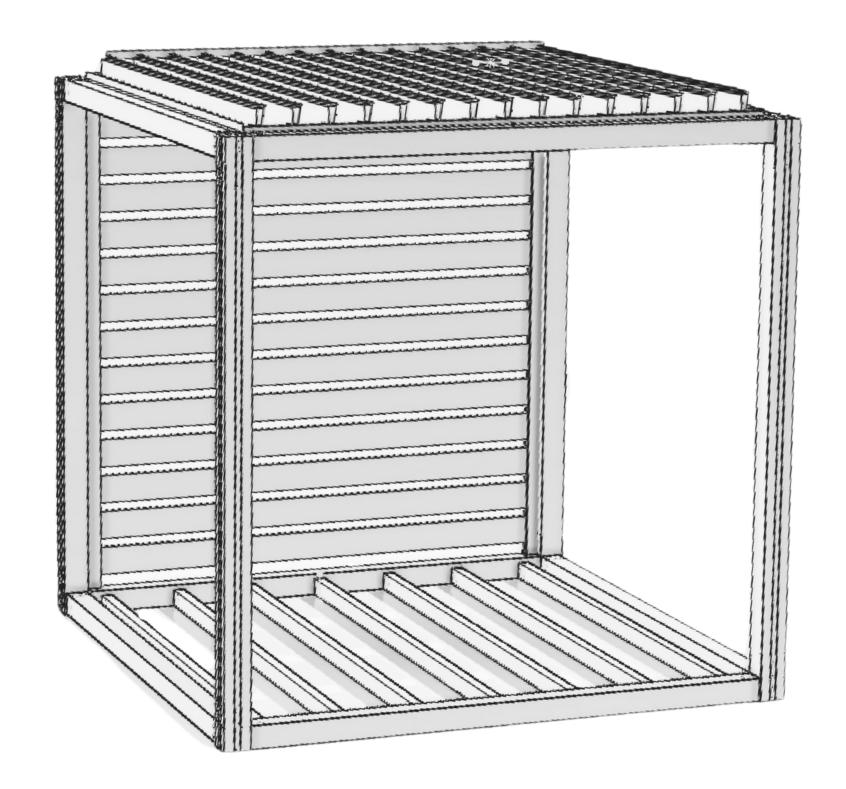



A private space in the open-air.

PRECISE ENGINEERING

K-BANA™'s manual louvered roof lets you customize the light, while built-in gutters keep drainage out of sight.

CUSTOMIZATION

3 standard sizes for multiple frame & roof panel configurations. K-BANA™'s integrated floor frame allows you to easily install custom-finished flooring.

READY-TO-INSTALL

Thanks to its clever design, our K-BANA™ can be installed almost anywhere in a few hours, often without a permit.