




1000-OS-M

(1000 Gallon Oil Separator-Monolithic)

Length	Width	Height	Invert	Liq. Lev.	Weight
102"	78"	71"	57"	45"	19176#

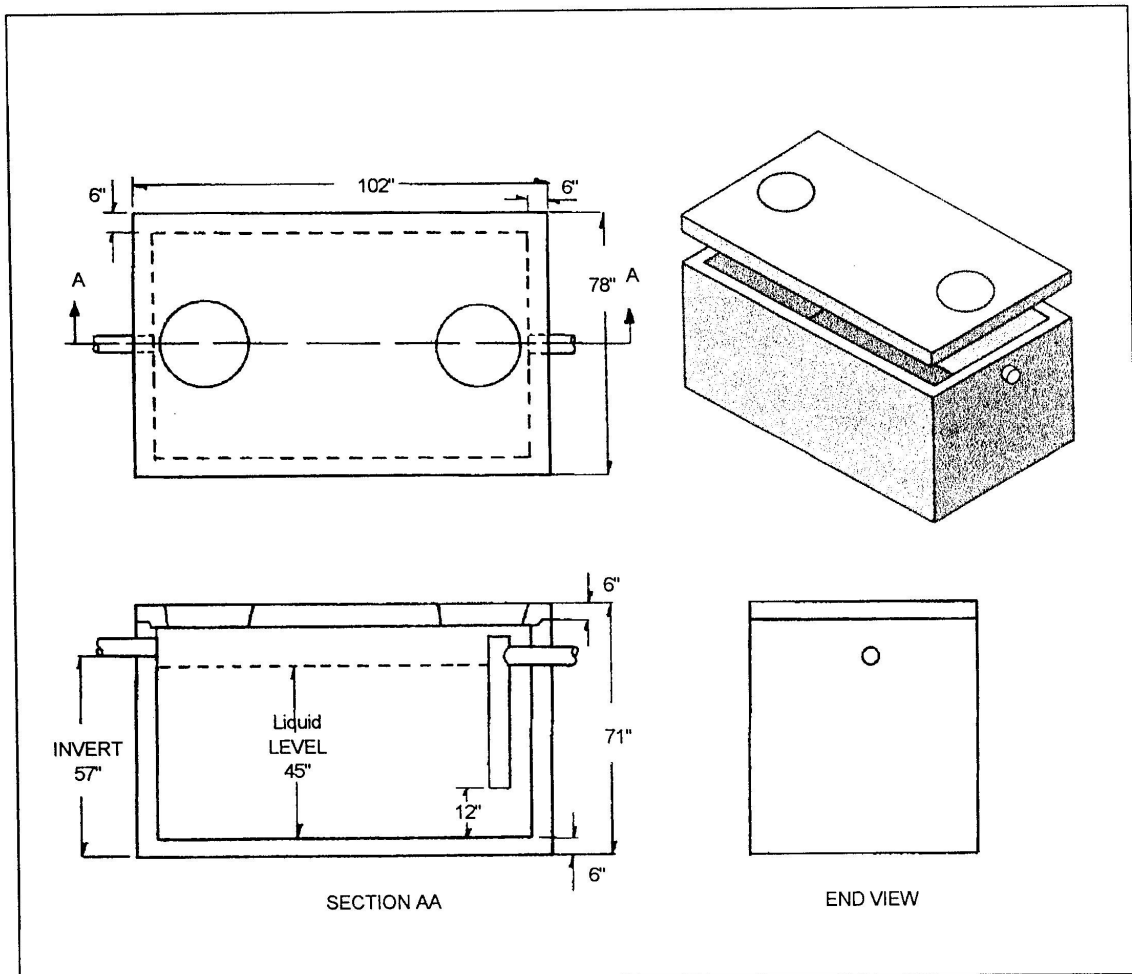

Concrete 4000 PSI 28 days
Steel Reinforcement: ASTM-A-615-68, Grade 40. 1" Minimum Cover
Schedule 40 Pipe Tees Included as Shown
Available in H-10 and H-20 Loading
Joint Sealed by Butyl Rubber Sealant

Monolithic Design
CT DEP Approved
Epoxy Coated Interior and Asphalt Coated Exterior
Capacity w/4" Pipe: 1,130 Gallons

39 PADANARAM ROAD
DANBURY, CT 06811

1-800-247-5559

PHONE: 203-743-5559
FAX: 203-790-7011


1000-OS-M



1000-OS-M-H20

(1000 Gallon Oil Separator-Monolithic)

Length	Width	Height	Invert	Liq. Lev.	Weight
102"	78"	71"	57"	45"	19226#

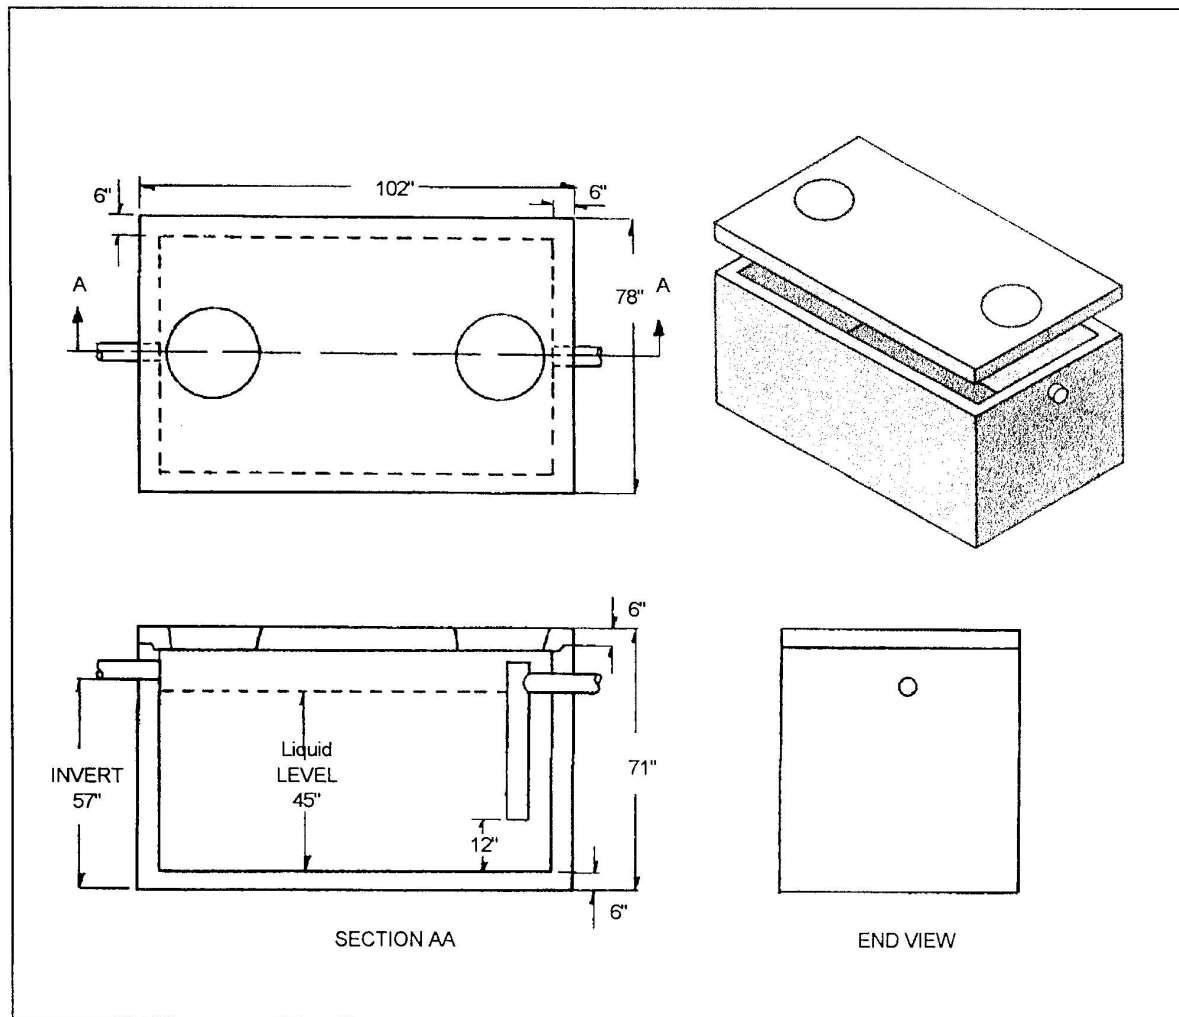

Concrete 4000 PSI 28 days
 Steel Reinforcement: ASTM-A-615-68, Grade 40. 1" Minimum Cover
 Schedule 40 Pipe Tees Included as Shown
 Available in H-10 and H-20 Loading
 Joint Sealed by Butyl Rubber Sealant

Monolithic Design
 CT DEP Approved
 Epoxy Coated Interior and Asphalt Coated Exterior
 Capacity w/4" Pipe: 1,130 Gallons

39 PADANARAM ROAD
 DANBURY, CT 06811

1-800-247-5559

PHONE: 203-743-5559
 FAX: 203-790-7011

1000-OS-M-H20