



PE-10

MINI EXCAVATOR



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters

Certification:



Operation Weight: 1000kg

Engine Brand: KOOP 192

Rated Power: 7kw

Digging Bucket Capacity: 0.02m³

Bucket Width: 350mm

Travel Speed: 0-3km/H

Max Grade Ability: 30°

fuel tank: 5.5L

Bucket digging force: 6.2kn

Total length of the vehicle: 2600mm

Total width of the vehicle: 850mm

Total vehicle height: 1480mm(Excluding the height of the shed)

Max Digging Depth: 1610mm

Max Digging Height: 2640mm

Max Unloading Height: 1890mm

Min Swing Radius: 1330mm

Max. Digging Depth Of Dozer Blade: 260mm

Height of the bulldozer shovel: 120mm

ASSISTIVE DEVICE

ARBITRARILY

COLLOCATION



OIL PIPE

It adopts three-layer explosion-proof steel wire oil pipes. The oil pipes are designed as built-in oil pipes, which can effectively protect



THE MACHINE COVER

features a molded design, making it aesthetically pleasing and robust, with no welding points, thus preventing welding failures or cracks.



OPERATION CONSOLE

The raised operation console, designed in accordance with ergonomics, makes the operation lever more comfortable.



ENGINE

The engine has the feature of higher efficiency, lower fuel consumption.

PE-10

MINIEXCAVATOR



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters


Operation Weight: 1000kg
Engine Brand: KOOP 192
Rated Power: 7KW
Digging Bucket Capacity: 0.02m ³
Bucket Width: 350mm
Travel Speed: 0-3km/h
Max Grade Ability: 30°
fuel tank: 5.5L
Bucket digging force: 6.2kn

Certification:



Overall Length: 2600mm
Overall Width: 850mm
Overall Height: 1480mm (Excluding the height of the shed)
Max Digging Depth: 1610mm
Max Digging Height: 2640mm
Max Unloading Height: 1890mm
Min Swing Radius: 1330mm
Max Digging Depth Of Dozer Blade: 260mm
Height of the bulldozer shovel: 120mm

ASSISTIVE DEVICE ARBITRARILY COLLOCATION

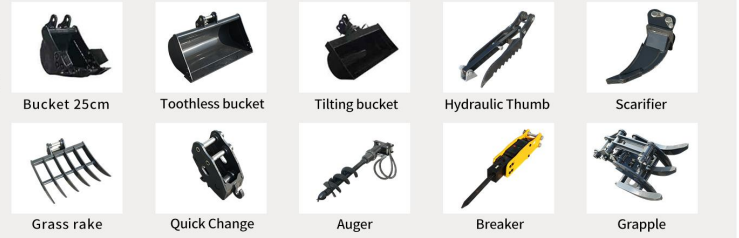

BRANDED ENGINES

Powerful performance, high efficiency and low fuel consumption, multiple engine options available.



HYDRAULIC PILOT

It is easy to operate, greatly reducing the driver's workload. Control is precise, and operation is very smooth.



SIDE SWING

Be more flexible and efficient when working in narrow or confined spaces.



STABLE CHASSIS

This effectively ensures the product's load-bearing capacity, making the equipment more durable.

PE-10S

MINIEXCAVATOR



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters

Operation Weight: 1000kg
Engine Brand: KOOP 192
Rated Power: 7.6KW/10HP
Digging Bucket Capacity: 0.03m ³
Bucket Width: 357mm
Travel Speed: 0-3km/h
Max Grade Ability: 30°
fuel tank: 4.89L
Hydraulic oil tank: 12L

Certification:




Overall Length: 2820mm
Overall Width: 943mm
Overall Height: 2220mm
Max Digging Depth: 1600mm
Max Digging Height: 2100mm
Max Unloading Height: 1550mm
Min Swing Radius: 1220mm
Max Digging Depth Of Dozer Blade: 210mm
Max Lifting Height Of Dozer Blade: 163mm

ASSISTIVE DEVICE

ARBITRARILY

COLLOCATION

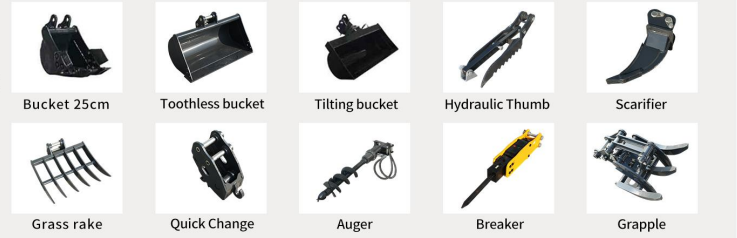

TOP-MOUNTED HYDRAULIC CYLINDER

While increasing machine power, it effectively reduces cylinder impact.




WIDENED BULLDOZER BLADE

It can bulldoze and backfill while providing stable support for the vehicle body.



THICKENED BUCKET

It uses high-strength, wear-resistant steel, resulting in better durability and strength.



ONE-PIECE MOLD

Superior material, high toughness, reinforced structure, with added reinforcing and supporting plates.



PE-12

MINIEXCAVATOR

PRODUCT INFORMATION

Product parameters

Operation Weight: 1200kg
Engine Brand: KOOP192/Kubota 722
Rated Power: 10.2kw
Digging Bucket Capacity: 0.02m ³
Bucket Width: 350mm
Travel Speed: 0-3km/H
Max Grade Ability: 30°
fuel tank: 11.8L
Bucket digging force: 6.5kn

Certification:



Total length of the vehicle: 2600mm
Total width of the vehicle: 850mm
Total vehicle height: 1985mm(Excluding the height of the shed)
Max Digging Depth: 1620mm
Max Digging Height: 2800mm
Max Unloading Height: 1955mm
Min Swing Radius: 1280mm
Max. Digging Depth Of Dozer Blade: 255mm
Height of the bulldozer shovel: 118mm



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

ASSISTIVE DEVICE

ARBITRARILY COLLOCATION



COUNTERWEIGHT

The addition of counterweights at the rear enhances the load-bearing capacity and stability of the excavator



SIDE SWING

Be more flexible and efficient when working in narrow or confined spaces.



CONTROL PANEL

The pull-down hydraulic pilot operating lever is easy and flexible to operate
The thickened seats enhance comfort



ENGINE

It adopts the internationally renowned brand Kubota engine, which is stable in performance and complies with EPA standards



PE-12S

MINI EXCAVATOR

PRODUCT INFORMATION

Product parameters

Operation Weight: 1200kg
Engine Brand: KOOP 192
Rated Power: 7kw
Digging Bucket Capacity: 0.03m ³
Bucket Width: 400mm
Travel Speed: 0-3km/h
Max Grade Ability: 30°
fuel tank: 6.6L
Hydraulic oil tank: 10.9L

Certification:



Overall Length: 3159mm
Overall Width: 935mm
Overall Height: 2157mm
Max Digging Depth: 1600mm
Max Digging Height: 2283mm
Max Unloading Height: 1698mm
Min Swing Radius: 1680mm
Max Digging Depth Of Dozer Blade: 209mm
Max Lifting Height Of Dozer Blade: 153mm




THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

ASSISTIVE DEVICE

ARBITRARILY

COLLOCATION

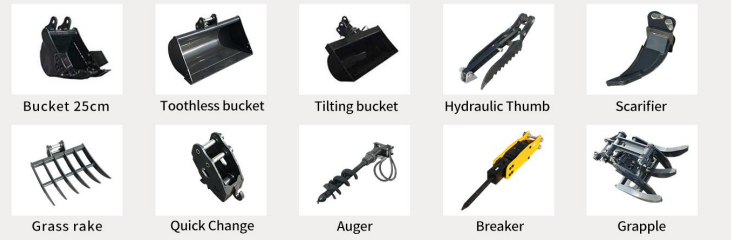

HYDRAULIC PILOT

It is easy to operate, greatly reducing the driver's workload. Control is precise, and operation is very smooth.



SIDE SWING

Be more flexible and efficient when working in narrow or confined spaces.



COUNTERWEIGHT

To maximize the excavator's performance. More stable equipment allows for better utilization of digging power.



ONE-PIECE MOLD

Superior material, high toughness, reinforced structure, with added reinforcing and supporting plates.



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION


Product parameters

Operation Weight: 1600kg	Certification:
Engine Brand: KubotaD722	EPA EURO5
Rated Power: 10.2kw	Total length of the vehicle: 3080mm
Digging Bucket Capacity: 0.03m ³	Total width of the vehicle: 1100mm
Bucket Width: 400mm	Total vehicle height: 2200mm
Travel Speed: 0-3km/H	Max Digging Depth: 1920mm
Max Grade Ability: 30°	Max Digging Height: 3025mm
fuel tank: 15.5L	Max Unloading Height: 2025mm
Bucket digging force: 6.5kn	Min Swing Radius: 1330mm
	Max. Digging Depth Of Dozer Blade: 295mm
	Height of the bulldozer shovel: 95mm

ASSISTIVE DEVICE

ARBITRARILY

COLLOCATION

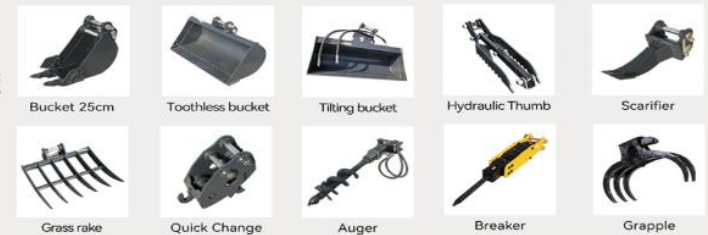

LARGE ARM OIL CYLINDER

The top-mounted pull cylinder design features a piston rod made of synthetic material for the lifting arm cylinder, which can provide protection and prevent damage.



SIDE SWING

Be more flexible and efficient when working in narrow or confined spaces.



RUBBER TRACKS

Able to provide strong traction and stable driving on various terrains. Do not damage the road surface.



DASHBOARD

The LCD screen design makes it convenient to check the working hours and the type of oil added at any time.

PE-18

MINIEXCAVATOR



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters

Operation Weight: 1800kg
Engine Brand: Kubota 722
Rated Power: 10.2KW
Digging Bucket Capacity: 0.04m ³
Rotation speed: 10r/min
Travel Speed: 0-3km/h
Max Grade Ability: 30°
fuel tank: 18L
Bucket digging force: 10.8kn

Certification:



Overall Length: 3030mm
Overall Width: 1100mm
Overall Height: 2280mm
Max Digging Depth: 2175mm
Max Digging Height: 2910mm
Max Unloading Height: 1925mm
Min Swing Radius: 1380mm
Max Digging Depth Of Dozer Blade: 250mm
Height of the bulldozer shovel: 230mm

ASSISTIVE DEVICE ARBITRARILY COLLOCATION



COUNTERWEIGHT

To maximize the excavator's performance. More stable equipment allows for better utilization of digging power.



ONE-PIECE MOLD

Superior material, high toughness, reinforced structure, with added reinforcing and supporting plates.



HYDRAULIC PILOT

It is easy to operate, greatly reducing the driver's workload. Control is precise, and operation is very smooth.



STABLE CHASSIS

This effectively ensures the product's load-bearing capacity, making the equipment more durable.

PE-18S

MINIEXCAVATOR



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters

Operation Weight: 1800kg
Engine Brand: Laidong 385 / Kubota 722.
Rated Power: 18.1kw
Digging Bucket Capacity: 0.04m ³
Bucket Width: 400mm
Travel Speed: 0-3km/H
Max Grade Ability: 35°
fuel tank: 13.5L
Hydraulic oil tank: 18L

Certification:



Total length of the vehicle: 3320mm
Total width of the vehicle: 1100mm
Total vehicle height: 2290mm
Max Digging Depth: 2200mm
Max Digging Height: 2900mm
Max Unloading Height: 1780mm
Min Swing Radius: 1467mm
Max Digging Depth Of Dozer Blade: 329mm
Height of the bulldozer shovel: 321mm

ASSISTIVE DEVICE

ARBITRARILY COLLOCATION



PILOTOPERATION

The pull-down safety lock device enhances safety during operation. Hydraulic pilot operation, with a light and flexible operation feel and good continuity of



SIDE SWING

Be more flexible and efficient when working in narrow or confined spaces.



COUNTERWEIGHT BLOCK

Enhance the stability and safety of the machine. It has greatly enhanced the load-bearing capacity of the excavator.



COOLING BOX.

The cooling performance is excellent. This ensures that the machine can operate for an extended period without overheating.



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters

Operation Weight: 2000kg

Engine Brand: KubotaD902

Rated Power: 11.8kw

Digging Bucket Capacity: 0.04m³

Bucket Width: 400mm

Travel Speed: 0-3km/H

Max Grade Ability: 30°

fuel tank: 18L

Bucket digging force: 13.8kn

Certification:



Total length of the vehicle: 3330mm

Total width of the vehicle: 1100mm

Total vehicle height: 2260mm

Max Digging Depth: 2110mm

Max Digging Height: 3220mm

Max Unloading Height: 2355mm

Min Swing Radius: 1650mm

Max. Digging Depth Of Dozer Blade: 180mm

Height of the bulldozer shovel: 230mm

ASSISTIVE DEVICE

ARBITRARILY

COLLOCATION



Bucket 25cm



Toothless bucket



Tilting bucket



Hydraulic Thumb



Scarifier



Grass rake



Quick Change



Auger



Breaker



Grapple



ENGINE

It adopts the internationally renowned brand Kubota Power and complies with EPA and Euro V standards



MOTOR

The motor adopts an internal design, effectively protecting the motor from wear and tear caused by bumps



COUNTERWEIGHT BLOCK

Increase the load-bearing capacity and stability of the excavator itself



CONTROL PANEL

It adopts hydraulic pilot operation on both sides of the seat, which is light, flexible and highly comfortable to operate

PE-25

MINIEXCAVATOR



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters

Operation Weight: 2500kg
Engine Brand: Kubota 1105
Rated Power: 14KW
Digging Bucket Capacity: 0.04m ³
Rotation speed: 9.5r/min
Travel Speed: 0-3km/h
Max Grade Ability: 30°
fuel tank: 28L
Bucket digging force: 18.4kn

Certification:



Overall Length: 2940mm
Overall Width: 1300mm
Overall Height: 2210mm
Max Digging Depth: 2300mm
Max Digging Height: 3295mm
Max Unloading Height: 2370mm
Min Swing Radius: 1735mm
Max Digging Depth Of Dozer Blade: 260mm
Height of the bulldozer shovel: 268mm

ASSISTIVE DEVICE ARBITRARILY COLLOCATION



TOP-MOUNTED HYDRAULIC CYLINDER
While increasing machine power, it effectively reduces cylinder impact.



THICKENED BUCKET
It uses high-strength, wear-resistant steel, resulting in better durability and strength.



SIDE SWING
Be more flexible and efficient when working in narrow or confined spaces.



STABLE CHASSIS
This effectively ensures the product's load-bearing capacity, making the equipment more durable.

PE-25S

MINI EXCAVATOR



A cab can be added



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters

Certification:



Operation Weight: 2500kg
Engine Brand: Changchai 390/Kubota 1105
Rated Power: 20kw
Digging Bucket Capacity: 0.07m ³
Bucket Width: 430mm
Travel Speed: 0-3km/H
Max Grade Ability: 30°
fuel tank: 16L
Hydraulic oil tank: 22L

Total length of the vehicle: 3966mm
Total width of the vehicle: 1350mm
Total vehicle height: 2280mm
Max Digging Depth: 2752mm
Max Digging Height: 3427mm
Max Unloading Height: 2203mm
Min Swing Radius: 2148mm
Width of the bulldozer shovel: 297mm
Height of the bulldozer shovel: 230mm

ASSISTIVE DEVICE

ARBITRARILY

COLLOCATION



PILOT OPERATION

The pull-down safety lock device enhances safety during operation. Hydraulic pilot operation, with a light and flexible operation feel and good continuity of



SIDE SWING

Be more flexible and efficient when working in narrow or confined spaces.



COUNTERWEIGHT BLOCK

Enhance the stability and safety of the machine. It has greatly enhanced the load-bearing capacity of the excavator.



COOLING BOX.

The cooling performance is excellent. This ensures that the machine can operate for an extended period without overheating.

PE-26S

MINIEXCAVATOR

OPTIONAL ENCLOSED CAB



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters

Operation Weight: 2600kg
Engine Brand: Changchai 390/Kubota 1703
Rated Power: 20kw
Digging Bucket Capacity: 0.075m ³
Bucket Width: 500mm
Travel Speed: 0-3 km/h
Max Grade Ability: 30°
fuel tank: 16L
Hydraulic oil tank: 26L

Certification:



Overall Length: 4185mm
Overall Width: 1500mm
Overall Height: 2280/2450mm
Max Digging Depth: 2750mm
Max Digging Height: 3453mm
Max Unloading Height: 2366mm
Min Swing Radius: 2159mm
Max Digging Depth Of Dozer Blade: 293mm
Max Lifting Height Of Dozer Blade: 191mm

ASSISTIVE DEVICE ARBITRARILY COLLOCATION



THICKENED FRAME
This effectively ensures the product's load-bearing capacity, making the equipment more durable.



SIDE SWING
Be more flexible and efficient when working in narrow or confined spaces.



WIDENED UPPER ARM
Using higher strength steel significantly improves fatigue resistance and deformation resistance.



COUNTERWEIGHT
It improves the stability and safety of the machine and greatly enhances the load-bearing capacity of the excavator.

PE-30

MINIEXCAVATOR



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters

Operation Weight: 3000kg
Engine Brand: Kubota 1105
Rated Power: 14KW
Digging Bucket Capacity: 0.07m ³
Rotation speed: 9.5r/min
Travel Speed: 0-3km/h
Max Grade Ability: 30°
fuel tank: 28L
Bucket digging force: 18.4kn

Certification:



Overall Length: 3850mm
Overall Width: 1300mm
Overall Height: 2250mm
Max Digging Depth: 2800mm
Max Digging Height: 4150mm
Max Unloading Height: 2550mm
Min Swing Radius: 1850mm
Max Digging Depth Of Dozer Blade: 270mm
Height of the bulldozer shovel: 292mm

ASSISTIVE DEVICE ARBITRARILY COLLOCATION



SIDE SWING

Be more flexible and efficient when working in narrow or confined spaces.



THICKENED BUCKET

It uses high-strength, wear-resistant steel, resulting in better durability and strength.



STABLE CHASSIS

This effectively ensures the product's load-bearing capacity, making the equipment more durable.



ONE-PIECE MOLD

Superior material, high toughness, reinforced structure, with added reinforcing and supporting plates.

PE-30S

MINI EXCAVATOR

OPTIONAL ENCLOSED CAB



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters

Operation Weight: 3000kg
Engine Brand: Changchai 390
Rated Power: 20kw
Digging Bucket Capacity: 0.1m ³
Bucket Width: 500mm
Travel Speed: 0-3km/h
Max Grade Ability: 30°
fuel tank: 20L
Hydraulic oil tank: 28L

Certification:



Overall Length: 4348mm
Overall Width: 1350mm
Overall Height: 2159mm
Max Digging Depth: 3058mm
Max Digging Height: 3445mm
Max Unloading Height: 2203mm
Min Swing Radius: 2165mm
Max Digging Depth Of Dozer Blade: 297mm
Max Lifting Height Of Dozer Blade: 230mm

ASSISTIVE DEVICE ARBITRARILY COLLOCATION



COUNTERWEIGHT

To maximize the excavator's performance. More stable equipment allows for better utilization of digging power.



SIDE SWING

Be more flexible and efficient when working in narrow or confined spaces.



WIDENED CHASSIS

The 1350mm widened chassis effectively ensures stability when working on complex road conditions.



ONE-PIECE MOLD

Superior material, high toughness, reinforced structure, with added reinforcing and supporting plates.

PE-35

MINIEXCAVATOR



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters

Operation Weight: 3500kg
Engine Brand: Kubota 1505
Rated Power: 18.2KW
Digging Bucket Capacity: 0.07m ³
Rotation speed: 8.5r/min
Travel Speed: 0-3km/h
Max Grade Ability: 30°
fuel tank: 43L
Bucket digging force: 26.5kn

Certification:



Overall Length: 4150mm
Overall Width: 1500mm
Overall Height: 2425mm
Max Digging Depth: 2800mm
Max Digging Height: 3970mm
Max Unloading Height: 2715mm
Minimum turning radius: 2250mm
Max Digging Depth Of Dozer Blade: 370mm
Height of the bulldozer shovel: 330mm

ASSISTIVE DEVICE ARBITRARILY COLLOCATION



SIDE SWING

Be more flexible and efficient when working in narrow or confined spaces.



HYDRAULIC PILOT

It is easy to operate, greatly reducing the driver's workload. Control is precise, and operation is very smooth.



DUAL-SPEED MOTOR

Enhanced adaptability to various working conditions, easily handling steep slopes and complex terrain.



ONE-PIECE MOLD

Superior material, high toughness, reinforced structure, with added reinforcing and supporting plates.

PE-35S

MINIEXCAVATOR



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters

Operation Weight: 3500kg
Engine Brand: Xinchai 490
Rated Power: 36.8kw
Digging Bucket Capacity: 0.1m ³
Bucket Width: 500mm
Travel Speed: 0-3km/h
Max Grade Ability: 30°
fuel tank: 40L
Hydraulic oil tank: 41L

Certification:



Overall Length: 4348mm
Overall Width: 1500mm
Overall Height: 2159mm
Max Digging Depth: 3058mm
Max Digging Height: 3445mm
Max Unloading Height: 2203mm
Min Swing Radius: 2165mm
Max Digging Depth Of Dozer Blade: 297mm
Max Lifting Height Of Dozer Blade: 230mm

ASSISTIVE DEVICE ARBITRARILY COLLOCATION



HYDRAULIC PILOT
It is easy to operate, greatly reducing the driver's workload. Control is precise, and operation is very smooth.



WIDENED BULLDOZER BLADE
It can bulldoze and backfill while providing stable support for the vehicle body.



COUNTERWEIGHT
To maximize the excavator's performance. More stable equipment allows for better utilization of digging power.



THICKENED FRAME
This effectively ensures the product's load-bearing capacity, making the equipment more durable.



PE-40

MINIEXCAVATOR

PRODUCT INFORMATION

Product parameters

Operation Weight: 4000kg
Engine Brand: Kubota 1505
Rated Power: 18.2KW
Digging Bucket Capacity: 0.09m ³
Rotation speed: 8.5r/min
Travel Speed: 0-3km/h
Max Grade Ability: 30°
fuel tank: 43L
Bucket digging force: 26.5kn

Certification:



Overall Length: 4485mm
Overall Width: 1550mm
Overall Height: 2435mm
Max Digging Depth: 2880mm
Max Digging Height: 4600mm
Max Unloading Height: 3175mm
Min Swing Radius: 2035mm
Max Digging Depth Of Dozer Blade: 340mm
Height of the bulldozer shovel: 335mm



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

ASSISTIVE DEVICE ARBITRARILY COLLOCATION

Bucket 25cm	Toothless bucket	Tilting bucket	Hydraulic Thumb	Scarifier
Grass rake	Quick Change	Auger	Breaker	Grapple



SIDE SWING

Be more flexible and efficient when working in narrow or confined spaces.



DUAL-SPEED MOTOR

Enhanced adaptability to various working conditions, easily handling steep slopes and complex terrain.



BRANDED ENGINES

Adopting world-class brands, Powerful performance, high efficiency and low fuel consumption.



ONE-PIECE MOLD

Superior material, high toughness, reinforced structure, with added reinforcing and supporting plates.

PE-40S

MINI EXCAVATOR



THE COLOR CAN BE CUSTOMIZED ACCORDING TO YOUR REQUIREMENTS

PRODUCT INFORMATION

Product parameters

Certification:



Operation Weight: 4000kg

Engine Brand: Kubota 1703

Rated Power: 18.2kw

Digging Bucket Capacity: 0.11m³

Bucket Width: 530mm

Travel Speed: 0-3km/H

Max Grade Ability: 30°

fuel tank: 40L

Hydraulic oil tank: 41L

Total length of the vehicle: 4945mm

Total width of the vehicle: 1700mm

Total vehicle height: 2585mm

Max Digging Depth: 3071mm

Max Digging Height: 4815mm

Max Unloading Height: 3382mm

Min Swing Radius: 2250mm


Max. Digging Depth Of Dozer Blade: 433mm

Height of the bulldozer shovel: 345mm

ASSISTIVE DEVICE

ARBITRARILY

COLLOCATION

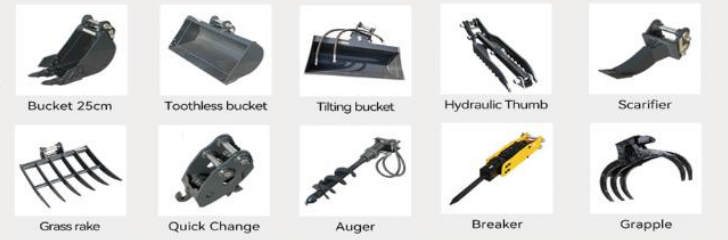

LOAD SENSITIVE VALVE

Delicate movements: gentle pulling leads to light movement, while heavy pulling adds force. When multiple movements are performed simultaneously, the movements will not slow down and the strength will not decline.



SIDE SWING

Be more flexible and efficient when working in narrow or confined spaces.



COUNTERWEIGHT BLOCK

Enhance the stability and safety of the machine. It has greatly enhanced the load-bearing capacity of the excavator.



VARIABLE PISTON PUMP

The core advantages are strong energy consumption control, fuel supply as needed, no waste, and the oil temperature is not easy to rise.