

# Septic Tanks & Collection Wells

Manufactured by



## Aussie Precast Products

11227 Princes Highway,



Cobargo N.S.W. 2550

Ph 0427 111 082

Australian Standards Lic No. SMK1473

Capacity in Litres	A	B	C	D		overall height
3050	1800	1690	400	1640		2040
3500	1930	1595	410	1540		1950
4600	1930	1910	420	1880		2300
* 3550	3200	620	360	570		930
Sizes & Capacities of Septic Tank						

\* These squat septic/collection tanks are specifically designed for shallow sites where depth is limited.

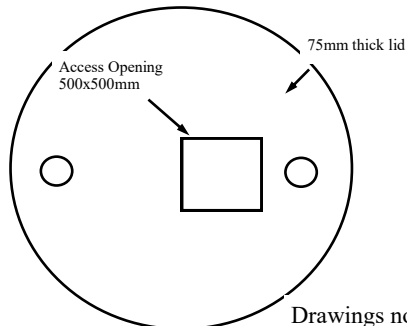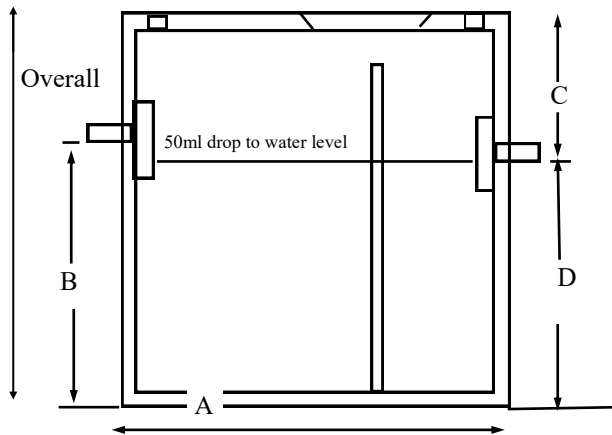

### SPECIFICATIONS

1. Baffle wall only in Septic Tanks
2. Concrete 40 m.p.a. comp. strength at 28 days reinforced with 126mm/sq mtr Steel Fibre to comply with AS/NZS 1546.1:2008
3. Baffle wall to have min. 150mm diam opening midway up from base to water level.
4. Inspection covers 150mm diameter
5. Floor & Lid thickness 65mm minimum.
6. Wall thickness 50mm minimum.

Name.....  
 Lot .....DP.....  
 Street.....  
 Locality.....  
 Shire.....

Capacity in Litres	A	B	C		Overall height
3750	1930	1540	410		1950
4750	1930	1880	420		2300
5550	1930	2160	425		2585
* 3600	3200	570	360		930
Sizes & Capacities of Collection Wells					

