


CCS RELOADING Recommendations.

20 Gauge And 12 Gauge

RELOAD THE BEST SABOT AND GAS SEALS MADE TODAY!!

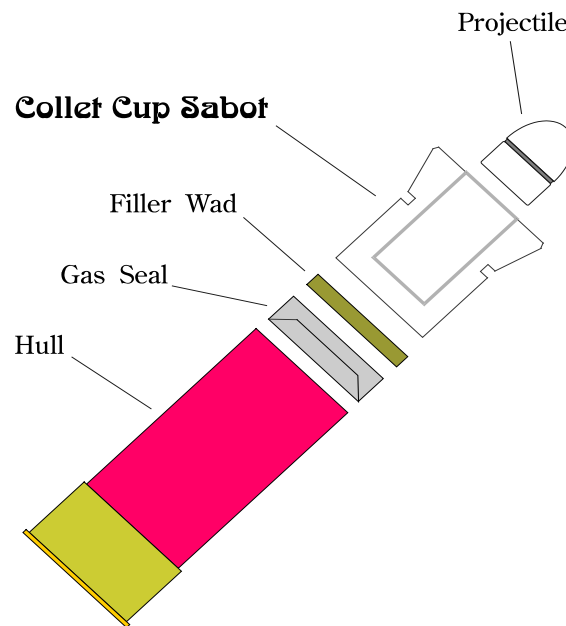

FOR MORE INFORMATION:

Email : Ladyvortex04@gmail.com

Mail: CCS Sabots LLC
29 Burd Rd
Pennington, NJ 08534

609-731-8088 TXT only

"CCS SLUGS AND SABOTS, ESTABLISHED 1990"

We except Check, Money order and *Paypal*:

All Orders are sent VIA USPS, or UPS ; a tracking number and txt email updates will be provided for your order. Please complete order form provided and email it back to Ladyvortex04@aol.com or take pic and TXT it to 609-731-8088 or simply mail it to us, 29 Burd Rd Pennington, NJ 08534.

LOADING DATA FOR CCS AMMO

20 GA. 2&3/4" & 3" LENGTH, ROLLED CRIMPED

DEAR CUSTOMER:

ALL INFORMATION IN THIS MANUAL HAS BEEN PRETESTED AND PROVEN ACCURATE.

ALL INFORMATION IN THIS MANUAL HAS BEEN TESTED WITH EITHER **.300 GRAIN
.350 GRAIN OR .250 GRAIN PROJECTILES.**

WE WILL BE CONTINUING TO IMPROVE LOADS IN THE NEAR FUTURE.
If you have loads you think should be included please feel free to email us.

**CCS SABOTS LLC, ASSUMES NO RESPONSIBILITY FOR DAMAGE, INJURY or
Death, AS A RESULT OF USE OF ENCLOSED INFORMATION.
THIS MANUAL WAS DESIGNED TO GIVE RELOADERS A STARTING POINT.
We are not responsible for your reloading your own ammunition.** There are many
variables when reloading ammunition, you assume all responsibility of reloading your own
ammunition with the components you purchased.

REGARDING POWDER: Several of the products that have been tested are no longer on
the market: We recommend speaking to your powder suppliers to purchase the powder
That is equivalent to what our recommendation is.

WE THANK YOU FOR TRYING OUR SABOTS AND GAS SEALS.

20 GA. 2&3/4"

NOTE: CHECK WAD COL.- 3/8" TO 1/2" OF SHELL ABOVE TOP OF SABOT IS RECOMMENDED FOR ROLL CRIMP.

POWDER	PRIMERS	WADS	VELOCITY	PRESSURES
IMR 4227 54GRS. LOAD	209	1-CCS GAS SEAL 1-.250 HARD CARD 1-CCS SABOT W/ .250GR. PROJECTILE	1625	10,420PSI RECOMMENDED
BLUE DOT 31 GRS.	209	1-CCS GAS SEAL 2-.250 HARD CARDS 1-CCS SABOT W/ .250GR. PROJECTILE	1640	
BLUE DOT 28GRS. LOAD	209	1-CCS GAS SEAL 3-.250 HARD CARDS 1-CCS SABOT W/ .300GR. PROJECTILE	1500	RECOMMENDED
BLUE DOT 27GRS.	209	1-CCS GAS SEAL 2-.250 CARDS 1-CCS SABOT W/.50 CAL. .325MZ PROJECTILE	ADJUST WAD COL. ACCORDINGLY	
BLUE DOT 19GRS	209	1-CCS GAS SEAL 1-CCS SABOT W/.50CAL. .325MZ PROJECTILE	ADJUST WAD COL. ACCORDINGLY	
BLUE DOT 28.5GRS.	209	1-CCS GAS SEAL 2-.250CARDS 1-CC SABOT W/.50CAL. .275MZ PROJECTILE	ADJUST WAD COL. ACCORDINGLY	
STEEL 34.5GRS	209A	1 - CCS GAS SEAL 2 - .125 HARD CARDS 1 - CCS 50 CAL. SABOT 1 - .275GR. BARNES MZ PROJECTILE	1850FPS 80#'S PRESSURE	
STEEL 32.5GRS	209A	1 – CCS GAS SEAL 2 - .125 NITRO CARDS 1 - CCS 50CAL. SABOT 1 – 325GR. BARNES MZ PROJECTILE	1825FPS 80#'S PRESSURE	
STEEL 33GR.	209A	1 – CCS GAS SEAL 2 - .125 NITRO CARDS 1 – 45CALIBER CCS SABOT 1 - .250 HORNADY “RED TIP” PROJECTILE	1890FPS 80#'S PRESSURE	

CCS SABOTS LLC. CCL FARMING LLC, ASSUMES NO RESPONSIBILITY FOR DAMAGE, INJURY or Death, AS A RESULT OF USE OF ENCLOSED INFORMATION.

THIS MANUAL WAS DESIGNED TO GIVE RELOADERS A STARTING POINT.

We are not responsible for you reloading your own ammunition. There are many variables when reloading ammunition, you assume all responsibility of

reloading your own ammunition with the components you purchased.

CONTINUED ON NEXT PAGE

20 GA. 2&3/4" CONTINUED FROM PAGE 3

STEEL 33GR.	209A	1 – CCS GAS SEAL 1 - .125 NITRO CARD 1 - .45 CALIBER CCS SABOT 1 - .250 BARNES SPIT-FIRE T-EZ PROJECTILE	1890FPS
STEEL 34 GR	209A	1 - CCS GAS SEAL 2 - .125 NITRO CARD 1 – 250GR XTP	1775FPS
4227 54GR.	209A	1 – CCS GAS SEAL 1 - .125 NITRO CARD 1 - .45 CALIBER CCS SABOT 1 -1 .250 BARNES SPIT-FIRE T-EZ PROJECTILE	1725FPS

USE STRAIGHT WALLED HULLS SUCH AS FIOCCHIE OR SLUG HULLS.

CCS SABOTS LLC, CCL FARMING LLC, ASSUMES NO RESPONSIBILITY FOR DAMAGE, INJURY or Death, AS A RESULT OF USE OF ENCLOSED INFORMATION.

THIS MANUAL WAS DESIGNED TO GIVE RELOADERS A STARTING POINT.

We are not responsible for you reloading your own ammunition. There are many variables when reloading ammunition, you assume all responsibly of reloading your own ammunition with the components you purchased.

LOADING DATA FOR CCS AMMO
20 GA. 3" LENGTH, ROLLED CRIMPED

NOTE: CHECK WAD COL.- 3/8" TO 1/2" OF SHELL ABOVE TOP OF SABOT IS RECOMMENDED FOR ROLL CRIMP.

POWDER	PRIMERS	WADS	VELOCITY	PRESSURES
IMR 4227 55GR	209	1-CCSGAS SEAL 2-.250 HARD CARDS 1-CCS SABOT/.250 BULLET	1670	
BLUE DOT 33 GRS	209	1-CCS GAS SEAL 3- .250 HARD CARDS 1-CCS SABOT/.250 GRBULLET		
BLUE DOT 29GRS	209	1-CCS GAS SEAL 3-.250 HARD CARDS 1-CCS SABOT/.300GR BULLET		
BLUE DOT 28.5GRS	209	1-CCS GAS SEAL 3-CARDS 1-CCS SABOT/.325MZ BULLET		
BLUE DOT 29.5GRS	209	1-CCS GAS SEAL 3-CARDS 1-CCS SABOT/.275GR BULLET		
STEEL 34.5GRS	209A	1 - CCS GAS SEAL 4- .125 HARD CARDS	1850FPS	

NOTE: USE .451 OR .452 DIAMETER BULLETS ONLY! Wad pressure should be 70# or less

LOADING DATA FOR CCS AMMO

12 GA. 2&3/4" LENGTH, ROLLED CRIMPED

NOTE: CHECK WAD COL.- 3/8" TO 1/2" OF SHELL ABOVE TOP OF SABOT IS RECOMMENDED FOR ROLL CRIMP.

POWDER PRIMERS WADS VELOCITY PRESSURES _____

BLUE DOT 209 1-CCS SEAL 1520 9,120 PSI

39.5 GRS. 1-.250 HARD CARD

1-.125 HARD CARD **RECOMMENDED LOAD**

1-CCS SABOT

W/.300 GR.,.45 CAL

PROJECTILE _____

UNIQUE 209 1-CCS SEAL 1460 8,860 PSI

24.5 GRS. 1-.250 HARD CARD **RECOMMENDED LOAD**

1-CCS SABOT W/.300GR

.45 CAL PROJECTILE _____

BLUE DOT 209 1-CCS SEAL 1600 9530 PSI

41.2 GRS. 1-.250 HARD CARD

1-.125 HARD CARD

1-CCS SABOT W/

.250 GR., .45 CAL

PROJECTILE _____

BLUE DOT 209 1-CCS GAS SEAL 1400 9,360 PSI

34.0 GRS. 1-.250 HARD CARD

1-CCS SABOT

W/.350 GR.,.45CAL

PROJECTILE _____

WAD PRESSURE ON ALL ABOVE LOADS SHOULD BE 110-120#'S

NOTE: USE ONLY STRAIGHT WALLED HULLS OR PREVIOUSLY LOADED SLUG HULLS

IMR4756 209 1-CCS GAS SEAL 1525 8900 PSI

31.5GRS. 3-.125 HARD CARDS

1-CCS .45 CAL. SABOT

W/.300GR. 45 CAL. PROJECTILE _____

UNIQUE 209 1-CCS GAS SEAL 1460 10430 PSI

24.5 GRS. 3-.125 HARD CARDS

1-CCS 50CAL. SABOT

W/.325GR. 50CAL PROJECTILE

STEEL 209 1-CCS GAS SEAL 1900+ 10400 PSI

50 GRS. 2-.125 HARD CARDS

"Hi Speed Load" 1-CCS .50 CAL. SABOT **RECOMMENDED**

325GR. 50 CAL. BARNES MZ PROJECTILE _____\

CCS SABOTS LLC. CCL FARMING LLC. ASSUMES NO RESPONSIBILITY FOR DAMAGE, INJURY or Death, AS A RESULT OF USE OF ENCLOSED INFORMATION.

THIS MANUAL WAS DESIGNED TO GIVE RELOADERS A STARTING POINT.

We are not responsible for you reloading your own ammunition. There are many variables when reloading ammunition, you assume all responsibility of

reloading your own ammunition with the components you purchased.

12 GA.

BLUE DOT 209 1-CCS GAS SEAL 1600 9800 PSI
40GRS. 3-.125 HARD CARDS
"Improved Load" 1-CCS .50 CAL. SABOT **RECOMMENDED**
.325GR. .50CAL. BARNES MZ PROJECTILE _____

WAD PRESSURE ON ALL ABOVE LOADS SHOULD BE 110-120#'S
NOTE: USE ONLY STRAIGHT WALLED HULLS OR PREVIOUSLY LOADED SLUG HULLS
POWDER PRIMERS WADS VELOCITY PRESSURES

IMR 4227 209 1-CCS GAS SEAL 1625 10,420PSI
54GRS. 1-.250 HARD CARD **RECOMMENDED LOAD**
1-CCS SABOT W/
.250GR. PROJECTILE _____

BLUE DOT 209 1-CCS GAS SEAL 1640
31 GRS. 2-.250 HARD CARDS
1-CCS SABOT W/
.250GR. PROJECTILE _____

BLUE DOT 209 1-CCS GAS SEAL 1500
28GRS. 3-.250 HARD CARDS **RECOMMENDED LOAD**
1-CCS SABOT W/
.300GR. PROJECTILE _____

540 WIN. 209 1-CCS GAS SEAL 1530
25GRS. 2-.250 HARD CARDS
1-CCS SABOT W/
.300GR. PROJECTILE _____

BLUE DOT 209 1-CCS GAS SEAL
27GRS. 2-.250 CARDS ADJUST WAD COL.
1-CCS SABOT W/.50 CAL. ACCORDINGLY
.325MZ PROJECTILE _____

BLUE DOT 209 1-CCS GAS SEAL ADJUST WAD COL.
19GRS 1-CCS SABOT W/.50CAL. ACCORDINGLY
.325MZ PROJECTILE

BLUE DOT 209 1-CCS GAS SEAL
28.5GRS. 2-.250CARDS ADJUST WAD COL.
1-CC SABOT W/.50CAL. ACCORDINGLY
.275MZ PROJECTILE _____

STEEL 209A 1 - CCS GAS SEAL 1850FPS
34.5GRS 2 - .125 HARD CARDS
1 - CCS 50 CAL. SABOT 80#'S PRESSURE
1 - .275GR. BARNES MZ PROJECTILE _____

CCS SABOTS LLC, CCL FARMING LLC, ASSUMES NO RESPONSIBILITY FOR DAMAGE, INJURY or Death, AS A RESULT OF USE OF ENCLOSED INFORMATION.

THIS MANUAL WAS DESIGNED TO GIVE RELOADERS A STARTING POINT.

We are not responsible for you reloading your own ammunition. There are many variables when reloading ammunition, you assume all responsibility of Reloading your own ammunition with the components you purchased.

12 Ga

STEEL 209A 1 – CCS GAS SEAL 1825FPS

32.5GRS 2 - .125 NITRO CARDS

1 - CCS 50CAL. SABOT 80#'S PRESSURE

1 – 325GR. BARNES MZ PROJECTILE _____

STEEL 209A 1 – CCS GAS SEAL 1890FPS

33GR. 2 - .125 NITRO CARDS 80#'S PRESSURE

1 – 45CALIBER CCS SABOT

1 - .250 HORNADY “RED TIP” PROJECTILE _____

STEEL 209A 1 – CCS GAS SEAL 1890FPS

33GR. 1 - .125 NITRO CARD

1 - .45 CALIBER CCS SABOT

1 - .250 BARNES SPIT-FIRE T-EZ PROJECTILE

4227 209A 1 – CCS GAS SEAL 1725FPS

54GR. 1 - .125 NITRO CARD

1 - .45 CALIBER CCS SABOT

1 -1 .250 BARNES SPIT-FIRE T-EZ PROJECTILE

USE STRAIGHT WALLED HULLS SUCH AS FIOCCHIE OR SLUG HULLS.

POWDER PRIMERS WADS VELOCITY PRESSURES

IMR 4227 209 1-CCSGAS SEAL 1670

55GR 2-.250 HARD CARDS

1-CCS SABOT/.250 BULLET

BLUE DOT 209 1-CCS GAS SEAL

33 GRS 3- .250 HARD CARDS

1-CCS SABOT/.250 GRBULLET

BLUE DOT 209 1-CCS GAS SEAL

29GRS 3-.250 HARD CARDS

1-CCS SABOT/.300GR BULLET

540 WIN. 209 1-CCS GAS SEAL

26 GRS 3-.250 CARDS

1-CCS SABOT /.300GR BULLET

BLUE DOT 209 1-CCS GAS SEAL

28.5GRS 3-CARDS

1-CCS SABOT/.325MZ BULLET

BLUE DOT 209 1-CCS GAS SEAL

29.5GRS 3-CARDS

1-CCS SABOT/.275GR BULLET

STEEL 209A 1 - CCS GAS SEAL 1850FPS
34.5GRS 4- .125 HARD CARDS
1 - CCS 50 CAL. SABOT 80#'S PRESSURE
1 - .275GR. BARNES MZ PROJECTILE_____

12 Ga

NOTE: USE .451 OR .452 DIAMETER BULLETS ONLY! Wad pressure should be 70# or less

USE STRAIGHT WALLED HULLS SUCH AS FIOCCHIE OR SLUG HULLS.

CCS SABOTS LLC. CCL FARMING LLC, ASSUMES NO RESPONSIBILITY FOR DAMAGE, INJURY or Death, AS A RESULT OF USE OF ENCLOSED INFORMATION.

THIS MANUAL WAS DESIGNED TO GIVE RELOADERS A STARTING POINT.

We are not responsible for you reloading your own ammunition. There are many variables when reloading ammunition, you assume all responsibility of reloading your own ammunition with the components you purchased.

USE STRAIGHT WALLED HULLS SUCH AS FIOCCHIE OR SLUG HULLS.

CCS SABOTS LLC. CCL FARMING LLC, ASSUMES NO RESPONSIBILITY FOR DAMAGE, INJURY or Death, AS A RESULT OF USE OF ENCLOSED INFORMATION.

THIS MANUAL WAS DESIGNED TO GIVE RELOADERS A STARTING POINT.

We are not responsible for you reloading your own ammunition. There are many variables when reloading ammunition, you assume all responsibility of reloading your own ammunition with the components you purchased.

REGARDING POWDER: Several of the products that have been tested are no longer on the market: We recommend speaking to your powder suppliers to purchase the powder That is equivalent to what our recommendation is.

Dedicated to my Parents Chris and Emma Young: We will keep your dream alive! God Bless You.