



G.T. COMIS

RACCORDERIE EMILIANE

Via Nino Bixio, 12 - 44042 CENTO (FE) • tel. 051 904583 r.a. - fax 051 904243
e-mail gtcomis@gtcomis.it

SCHEMA TECNICA – Technical Sheet

ART. 1022: Valvola di ritegno

Check valve

- R E -

Materiale/Material: AISI 316 (1.4401)

Filettatura/Thread: UNI EN 10226-1 (ex iso 7/1)

Certificato/Certificate: EN 10204 3.1


Temperatura di lavoro/Working temperature:

-10° / +100° with NBR gasket (black)

-20° / +200° with FPM-FKM gasket (green)

Pressione massima nominale/Nominal maximum

pressure: PN16 – Opening pressure: 005 Mpa average

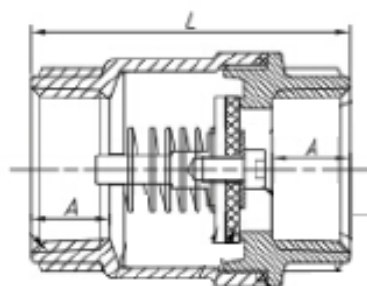

Codice - Code	Ø	Tenuta - Sealing	A mm	L mm	Conf. - Pack
2320758	1/2"	NBR	13,5	53,5	1
2320759	3/4"	NBR	14,5	58	1
2320760	1"	NBR	16	65	1
2320761	1"1/4	NBR	18,5	72,5	1
2320762	1"1/2	NBR	18,5	76	1
2320763	2"	NBR	22,5	88,5	1
2320708	1/2"	FPM-FKM	13,5	53,5	1
2320709	3/4"	FPM-FKM	14,5	58	1
2320710	1"	FPM-FKM	16	65	1
2320711	1"1/4	FPM-FKM	18,5	72,5	1
2320712	1"1/2	FPM-FKM	18,5	76	1
2320713	2"	FPM-FKM	22,5	88,5	1