



G.T. COMIS

RACCORDERIE EMILIANE

Via Nino Bixio, 12 - 44042 CENTO (FE) • tel. 051 904583 r.a. - fax 051 904243
e-mail gtcomis@gtcomis.it


SCHEMA TECNICA – Technical Sheet

ART. 1710: Valvola a farfalla

Tipo wafer

Wafer butterfly valve

- R E -

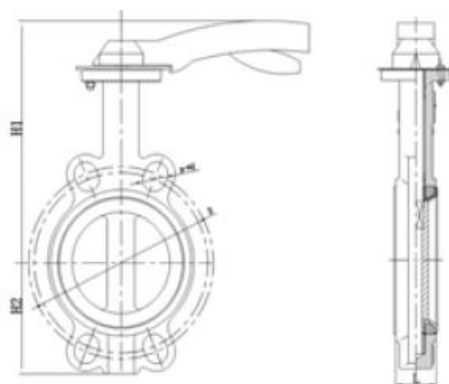

Material: Ductile iron GGG50

Thread: Flange EN 1092-1

Norm: EN593, DM174

Codice - Code	DN	DISC	L mm	D mm	n-Ød	H1 mm	H2 mm
1140277	40	GHISA	33	110	4-19	154	73
1140278	50	GHISA	43	125	4-19	156	75
1140279	65	GHISA	46	145	4-19	167	85
1140280	80	GHISA	46	160	8-19	174	92
1140290	100	GHISA	52	180	8-19	195	109
1140281	125	GHISA	56	210	8-19	208	130
1140282	150	GHISA	56	240	8-23	230	139
1140283	200	GHISA	60	295	12-23	267	173
NEW 1140284	250	GHISA	68	355	12-28	265	207
NEW 1140285	300	GHISA	78	410	12-28	302	235
NEW 1140286	350	GHISA	78	470	16-28	530	264
NEW 1140287	400	GHISA	90	525	16-31	606	308

Codice - Code	DN	DISC	L mm	D mm	n-Ød	H1 mm	H2 mm
1140245	40	AISI 316	33	110	4-19	154	73
1140246	50	AISI 316	43	125	4-19	156	75
1140247	65	AISI 316	46	145	4-19	167	85
1140248	80	AISI 316	46	160	8-19	174	92
1140249	100	AISI 316	52	180	8-19	195	109
1140250	125	AISI 316	56	210	8-19	208	130
1140251	150	AISI 316	56	240	8-23	230	139
NEW 1140252	200	AISI 316	60	295	12-23	227	173
NEW 1140253	250	AISI 316	68	355	12-28	265	207
NEW 1140254	300	AISI 316	78	410	12-28	302	235
NEW 1140255	350	AISI 316	78	470	16-28	530	264
NEW 1140256	400	AISI 316	90	525	16-31	606	308



G.T. COMIS

RACCORDERIE EMILIANE

Via Nino Bixio, 12 - 44042 CENTO (FE) • tel. 051 904583 r.a. - fax 051 904243
e-mail gtcomis@gtcomis.it


SCHEMA TECNICA – Technical Sheet

ART. 1710: Valvola a farfalla

Tipo wafer

Wafer butterfly valve

- R E -

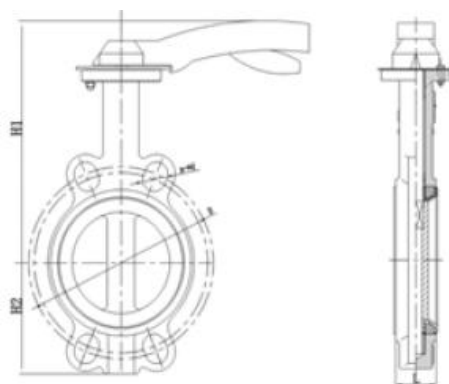

Material: Ductile iron GGG50

Thread: Flange EN 1092-1

Norm: EN593, DM174

	Caratteristiche Features
Pressione esercizio Working pressure	PN 10 / PN 16
Temperatura esercizio Working temperature	-20°C / +110°C
Norma progetto Design standard	EN 593:20217
Scartamento Face to face	EN 558
Flange Flanges	EN 1092-1:2018
Flangia superiore Top flange	EN ISO 5211:2017
Collaudi Tests	EN 12266-1:2013
Rivestimento Coating	Polvere epossidica RAL 5017, spessore 200-250 um Epoxy powder RAL 5017, thickness 200-250 um

Nr.	Descrizione Description	Materiale Material
1	Corpo Body	Ghisa sferoidale GGG 50 Ductile iron GGG 50
2	Disco Disc	Ghisa sferoidale GGG 50 Ductile iron GGG 50
3	Tenuta Seat	EPDM
4	Albero Stem	Acciaio inox AISI 416 SS AISI 416
5	Spina Taper pin	Acciaio inox AISI 316 SS AISI 316
6	Boccola Bushing	Fibra di vetro + PTFE Fiberglass + PTFE
7	O-Ring	EPDM
8	Leva Handlever	Acciaio al carbonio / Alluminio Carbon Steel / Aluminum



G.T. COMIS

RACCORDERIE EMILIANE



Via Nino Bixio, 12 - 44042 CENTO (FE) • tel. 051 904583 r.a. - fax 051 904243
e-mail gtcomis@gtcomis.it

SCHEMA TECNICA – Technical Sheet

ART. 1710: Valvola a farfalla

Tipo wafer

Wafer butterfly valve

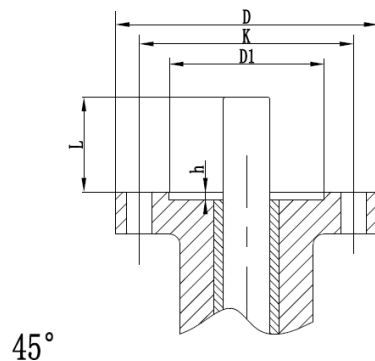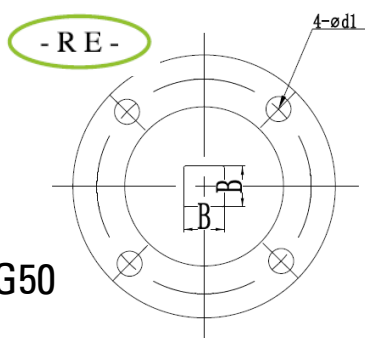

Material: Ductile iron GGG50

Thread: Flange EN 1092-1

Norm: EN593, DM174

尺寸	D	K	D ₁	h	BXB	L	n-ød1	ISO 5211 Pad
DN40 (1.5")	ø65	ø50	ø35	3	9 X 9	26	4-ø7	F05
DN50 (2")	ø65	ø50	ø35	3	9 X 9	26	4-ø7	
DN65 (2.5")	ø65	ø50	ø35	3	9 X 9	26	4-ø7	
DN80 (3")	ø65	ø50	ø35	3	9 X 9	26	4-ø7	
DN100 (4")	ø90	ø70	ø55	3	11 X 11	26	4-ø10	F07
DN125 (5")	ø90	ø70	ø55	3	14 X 14	30	4-ø10	
DN150 (6")	ø90	ø70	ø55	3	14 X 14	30	4-ø10	
DN200 (8")	ø125	ø102	ø70	3	17 X 17	40	4-ø12	F10
DN250 (10")	ø125	ø102	ø70	3	22 X 22	40	4-ø12	
DN300 (12")	ø125	ø102	ø70	3	22 X 22	45	4-ø12	
DN350 (14")	ø125	ø102	ø70	3	22 X 22	45	4-ø12	
DN400 (16")	ø175	ø140	ø100	4	27 X 27	60	4-ø18	