

560P Series

Wrap-and-Fill High Temperature Polymer Film capacitors



Film Capacitor with Metallized Polymer Dielectric
Industry-Leading Performance at Temperatures up to +180°C

FEATURES

- High temperature to +180°C
- Stable Performance through Temperature/Voltage Range Rugged/Lightweight Construction
- Manufactured in U.S.

APPLICATIONS

- Aerospace & Defense
- High Temperature Modules
- Industrial

PHYSICAL CHARACTERISTICS

Construction: Non-Inductive wound metallized Polymer film

Case: Flame retardant tape wrap and high temperature resin end fill

Lead Material: 0.200 to 0.500 in. Copper clad steel
 > 0.500 in. Tinned copper wire

Lead Strength: Capable of withstanding a five pound pull force on lead axis

ELECTRICAL SPECIFICATIONS

Electrical specifications	
Parameter	Value
Operating Temperature	–55°C to +150°C Up to +180°C with derating
Capacitance Range	0.1 µF to 10 µF
Capacitance Tolerance	± 10%, ± 5%
Dissipation Factor	0.05% max When measured at 1 kHz @ 25°C
Insulation Resistance	
for $C_R \leq 0.1 \mu F$	Measured in MΩ
for $C_R > 0.1 \mu F$	Measured in MΩ-µF
at +25°C	100,000 MΩ-µF, need not exceed 200,000 MΩ
at +85°C	20,000 MΩ-µF, need not exceed 40,000 MΩ
at +125°C	3,000 MΩ-µF, need not exceed 6,000 MΩ
at +150°C	900 MΩ-µF, need not exceed 1,800 MΩ

Custom configurations and extended/intermediary values available upon request.

HOW TO ORDER


560P	104	X9	320
Series	Capacitance code	Tolerance code	Voltage rating
560P	104 = 100nF	X9 = ± 10% X5 = ± 5%	320 = 320 V _{DC}

Wrap-and-Fill High Temperature Polymer Film capacitors

560P Series





OUTLINE DIMENSIONS in inches

Lead Wire Sizes	
Case Diameter	Lead AWG
< 0.200	No. 24
0.200 to 0.400	No. 22
0.401 to 0.500	No. 20
> 0.500	No. 18

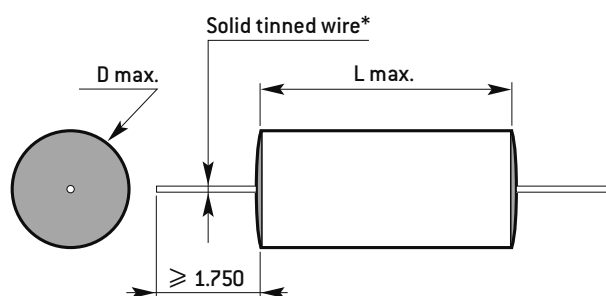

* Leads to be within ± 0.062 " at center line at egress, but not less than 0.031" from edge

DIELECTRIC CHARACTERISTICS

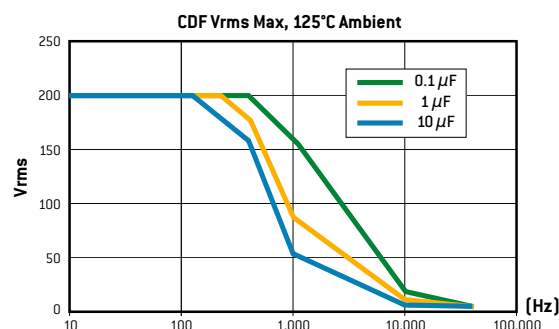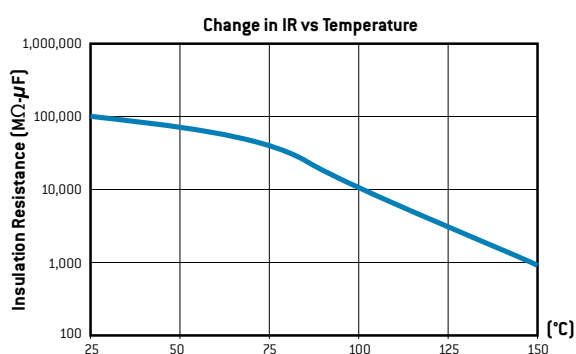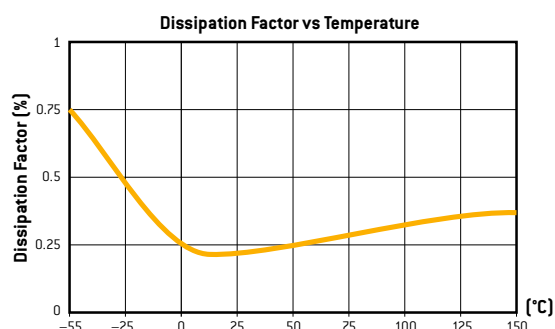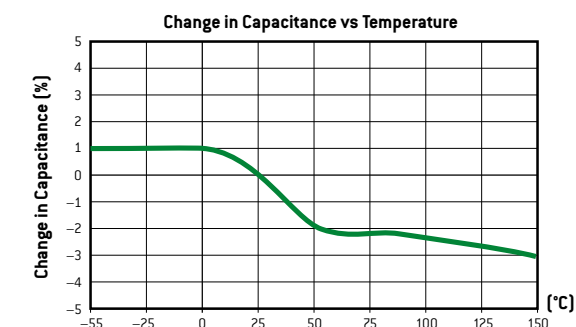

CONFIGURATION OUTLINE

Capacitance (μF)	Part Number	Dimensions in inches	
	+150°C	D max.	L max.
320 V_{DC}			
0.1	560P104X*320Y	0.16	0.75
0.22	560P224X*320Y	0.22	0.75
0.33	560P334X*320Y	0.27	0.75
0.47	560P474X*320Y	0.31	0.75
0.68	560P684X*320Y	0.37	0.75
0.82	560P824X*320Y	0.41	0.75
1	560P105X*320Y	0.29	1.25
2	560P205X*320Y	0.42	1.25
3	560P305X*320Y	0.52	1.25
5	560P505X*320Y	0.61	1.25
10	560P106X*320Y	0.78	1.5
400 V_{DC}			
0.1	560P104X*400Y	0.2	0.75
0.22	560P224X*400Y	0.28	0.75
0.33	560P334X*400Y	0.34	0.75
0.47	560P474X*400Y	0.4	0.75
0.68	560P684X*400Y	0.3	1.25
0.82	560P824X*400Y	0.33	1.25
1	560P105X*400Y	0.36	1.25
2	560P205X*400Y	0.54	1.25
3	560P305X*400Y	0.65	1.25
5	560P505X*400Y	0.68	1.5
10	560P106X*400Y	0.98	1.5
560 V_{DC}			
0.1	560P104X*560Y	0.28	0.75
0.22	560P224X*560Y	0.4	0.75
0.33	560P334X*560Y	0.48	0.75
0.47	560P474X*560Y	0.34	1.25
0.68	560P684X*560Y	0.41	1.25
0.82	560P824X*560Y	0.45	1.25
1	560P105X*560Y	0.49	1.25
2	560P205X*560Y	0.72	1.25
3	560P305X*560Y	0.7	1.75
5	560P505X*560Y	0.82	1.75
800 V_{DC}			
0.1	560P104X*800Y	0.44	0.75
0.22	560P224X*800Y	0.3	1.25
0.33	560P334X*800Y	0.36	1.25
0.47	560P474X*800Y	0.42	1.25
0.68	560P684X*800Y	0.5	1.25
0.82	560P824X*800Y	0.55	1.25
1	560P105X*800Y	0.61	1.25
2	560P205X*800Y	0.73	2
3	560P305X*800Y	0.89	2
5	560P505X*800Y	1.05	2

* Input tolerance number to complete part number: **9** = $\pm 10\%$, **5** = $\pm 5\%$

Custom configurations and extended/intermediary values available upon request.