

Sonitron Automotive Piezo components


SAP-1302 series *Backup alarm*

The 1100 series of piezo alarms generate an acoustic intermittent loud tone and are installed at the back of a car, truck, tractor, jeep, golf-trolley, ... or any other vehicle that can move in reverse at any moment, thus alerting people that are approaching the vehicle.

The 1100 series are tested for use in all weather conditions and have a lifetime in continuous use of more than 1000 hours, this unique patented technology is used now for more than 20 years in the most extreme conditions and critical applications. (Nato, Airbus, Volvo, avionics, Bombardier railways, VDO, etc...)

A very low current consumption permits the electrical connection of the alarm to the reversing lights of the vehicle.

Installation of the reverse drive piezo alarm is realised in only one hour by anybody and does not require special skills. Adapted mounting for models on request.

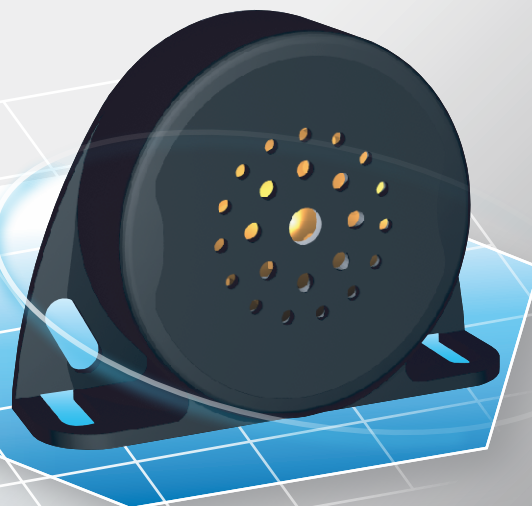

Automotive Design



ADVANTAGES & APPLICATIONS


ADVANTAGES :

- Very low current consumption
- Dust tight, shock and water resistant (IP67)
- Low frequency (large travelling distance of audible wavelength)
- No magnetic field (EMC)
- Robust fibre reinforced PBT housing
- High lifetime in continuous function
- Easy mountable design
- Multi voltage application (12/24/48Vdc)

APPLICATIONS :

- Van
- Fork-lift
- Lorry
- Bus
- Light commercial vehicle
- Car
- Light truck
- Garbage truck
- Electric vehicles (golf, airport, warehouse,...)
- Military vehicles

Reverse drive alarm (Back up alarm)

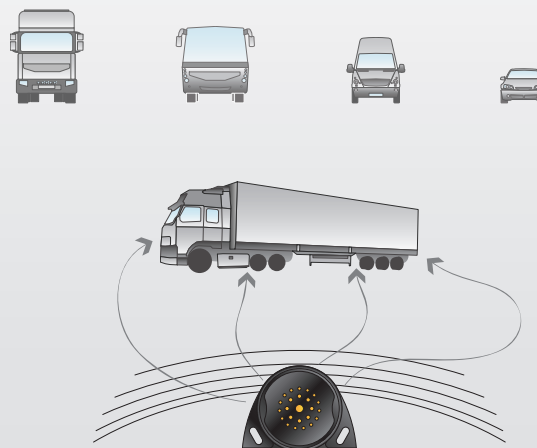



SPECIFICATIONS

Model	SAP-1302-C	SAP-1302-D
Operating voltage:	12/24/48 Vdc	12 Vdc**
Frequency (+/-15%):	1250 Hz* (1Hz intermittent)	2500 Hz* (1Hz intermittent)
Current consumption:	40 mA (average)	15 mA (average)
SPL@1.2m:	97 dBA (+/- 4 dB)	87 dBA (+/- 4 dB)
Life time (@21°C):	>1000 hours***	>1000 hours***
Case material:	PBT (UL rating: 94HB)	PBT (UL rating: 94HB)
Standard color of case:	Black	Black
Terminal material:	(F2)Fast-on or cable 2x1.5mm ²	(F2)Fast-on or cable 2x1.5mm ²
Storage Temp. range:	-40°C/+85°C	-40°C/+85°C
Operating Temp. range:	-40°C/+85°C	-40°C/+85°C
Weight:	210 g	230 g

- *Continuous and sweeping tone possible.
- **Output voltage depending: min. 5 Vdc=76 dBA, max. 16Vdc=91 dBA.
- ***Lifetime: more than 1000 hours in continuous use,
(Voltage: 12 Vdc ; T ambient: 21°C ; Humidity: 40 % ; Free air).

ELECTRICAL PARAMETERS

Sound pressure level vs. operating voltage


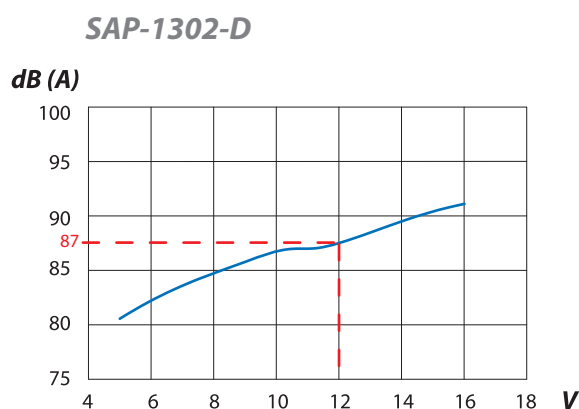
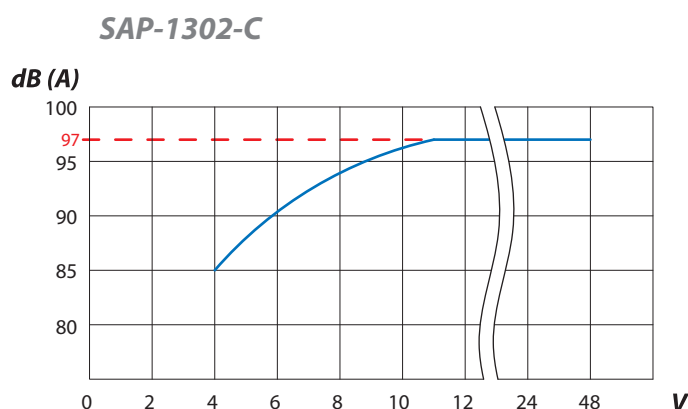


All measurements are made @ 12Vdc @1.2 meter in free air @ 21°C.



LIST OF AVAILABLE PRODUCT TYPES

SAP-1302-C-F2	(Fast-on F2, tinned brass)
SAP-1302-C-W	(standard cable length=30cm)
SAP-1302-D-F2	(Fast-on F2, tinned brass)
SAP-1302-D-W	(standard cable length=30cm)


Dimensions (in mm)

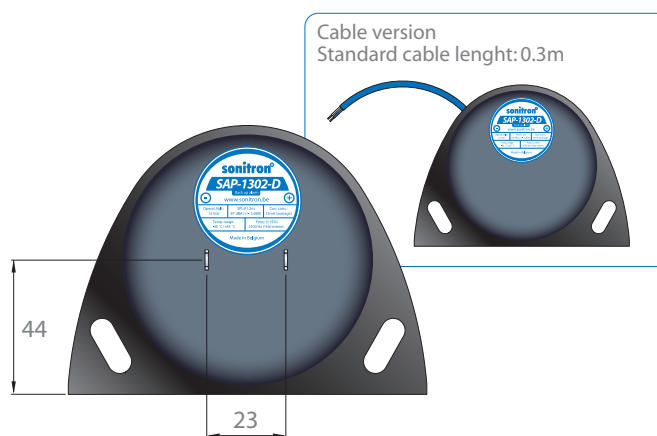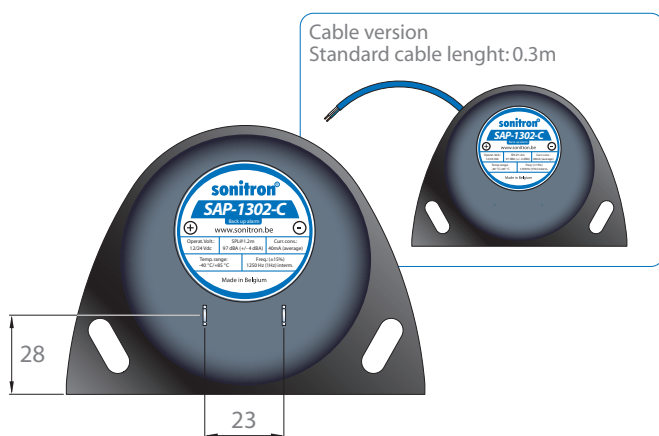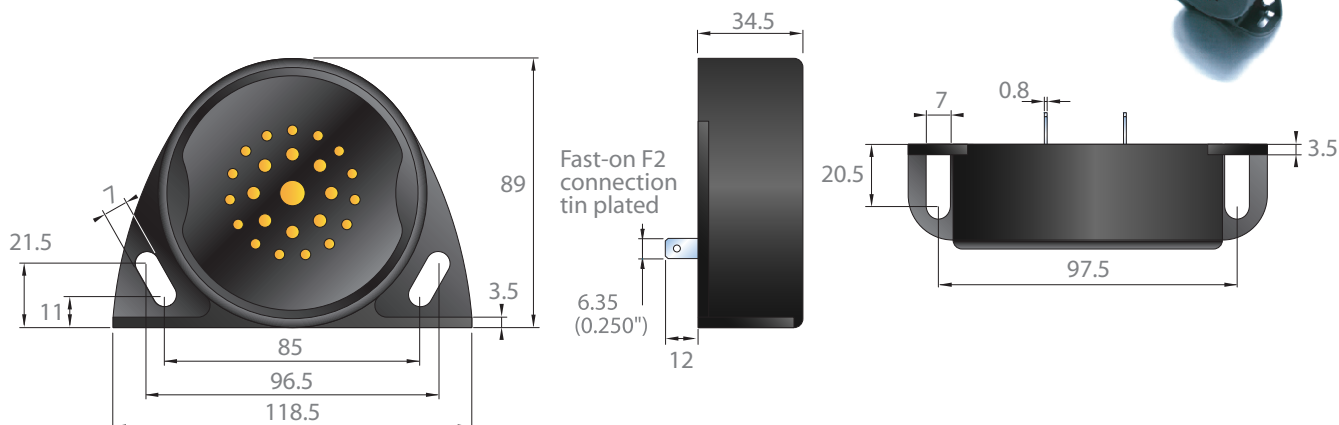

Mounting guidelines

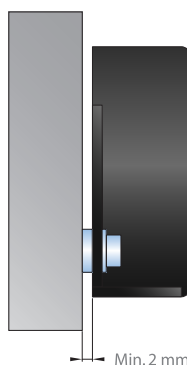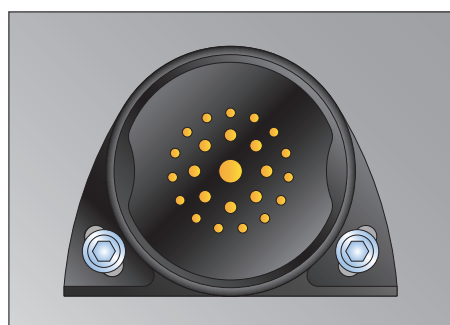

2x M6 screw, nut and washer recommended for mounting

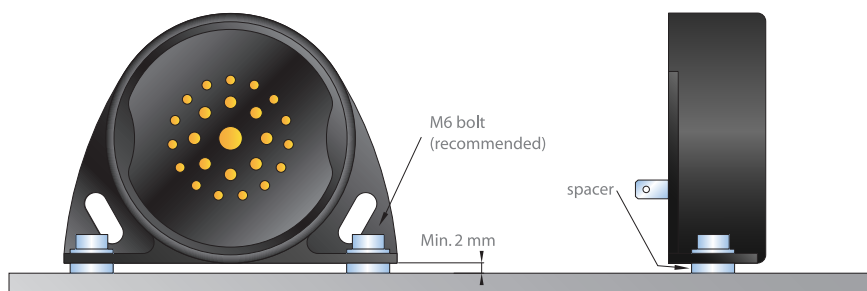

Packaging

One piece per box.

