

LIGHT TECHNICAL DATA

78-0150-000009

Lumen output:	max 4800lm
Efficiency:	120lm/W
Colour temperature:	3000K
Colour rendering:	CRI90
SDCM (MacAdam):	MacAdam 3
Lifetime:	L80B10 100.000 hours
Light distribution:	Indirect
Beam angle:	135°



LIGHT CONTROL

Dimmable:	Yes
Dimming method:	1-10V / DALI (depending on driver)
Emergency lighting:	No
Sensor:	No



ELECTRICAL DATA

Voltage:	220-240VAC
Frequency:	50/60Hz
Power:	28W at 650mA
Leakage current:	<700 µA
Driver:	External

MECHANICAL DATA

Dimensions:	L:595 x W:595 x H:85
Weight:	2,2kg
Material:	Polycarbonate and aluminium
Diffuser:	MACPET
Luminaire color	White
IP Rating:	IP20
Insulation class:	Class II
Mounting type:	Recessed or surface-mounted with frame
Connection:	DC plug
Accessories:	Surface-mounting frame

ECOLITE has been designed to provide indirect lighting for better indoor climate.

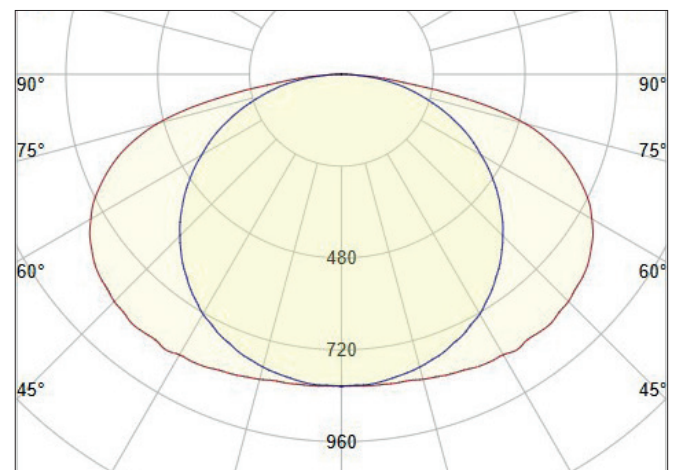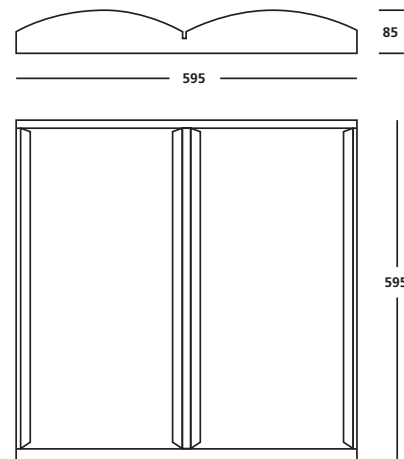

	B10	B13	B16	B20	C10	C13	C16	C20
Standard	18	24	30	37	31	40	51	62