

LIGHT TECHNICAL DATA

78-0150-000012

Lumen output:	max 4320lm
Efficiency:	108lm/W
Colour temperature:	CCT 2700K-6500K
Colour rendering:	CRI90
SDCM (MacAdam):	MacAdam 3
Lifetime:	L80B10 100.000 hours
Light distribution:	Indirect
Beam angle:	135°



ECOLITE has been designed to provide indirect lighting for better indoor climate.

LIGHT CONTROL




Dimmable:	Yes
Dimming method:	1-10V / DALI (depending on driver)
Emergency lighting:	No
Sensor:	No

ELECTRICAL DATA

Voltage:	220-240VAC
Frequency:	50/60Hz
Power:	28W at 650mA
Leakage current:	<700 µA
Driver:	External

MECHANICAL DATA

Dimensions:	L:595 x W:595 x H:85
Weight:	2,2kg
Material:	Polycarbonate and aluminium
Diffuser:	MACPET
Luminaire color	White
IP Rating:	IP20
Insulation class:	Class II
Mounting type:	Recessed or surface-mounted with frame
Connection:	DC plug
Accessories:	Surface-mounting frame

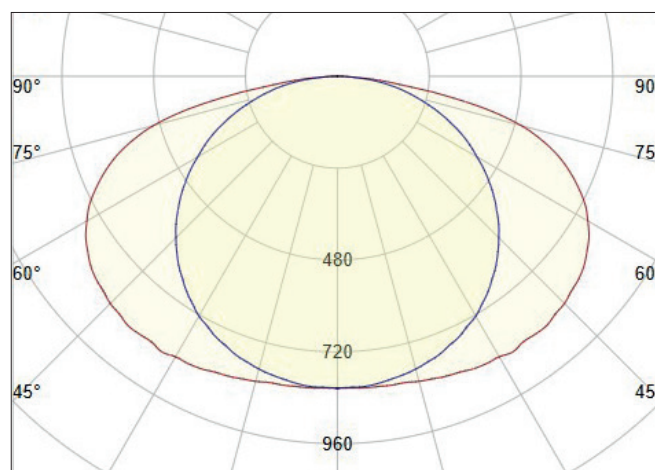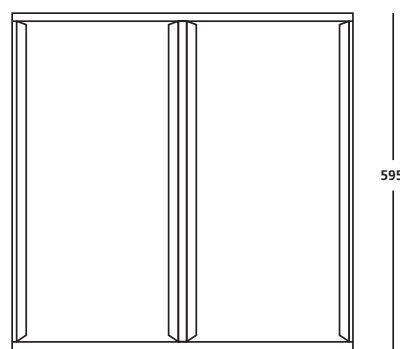

	B10	B13	B16	B20	C10	C13	C16	C20
Standard	18	24	30	37	31	40	51	62