


Designed by Pilgaard Design Studio
Produced and manufactured by LITE



LYKTEN WALL

OUTDOOR / WALL MOUNTED

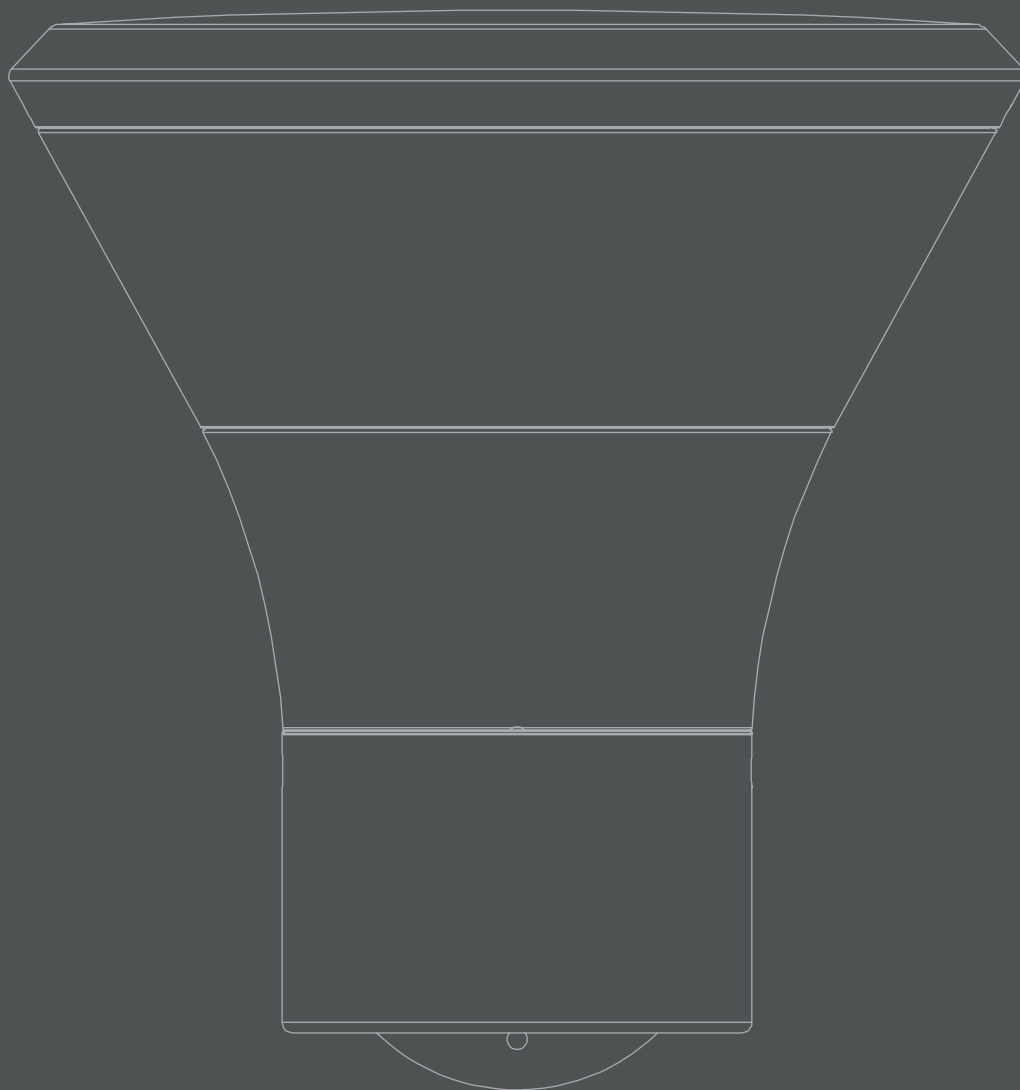

LITE A/S • Østre Fælledvej 11, 9400 Nørresundby
www.lite-led.com • +45 88 72 88 00 • info@lite-led.dk



LYKTEN WALL

LYKTEN WALL is a versatile and modular wall-mounted luminaire with a distinctive conical design, developed to create atmospheric and functional lighting for façades, entrance areas, and other outdoor environments. Manufactured from die-cast aluminium, the luminaire offers excellent durability and resistance to the harsh Nordic climate, while the clear UV-resistant polycarbonate diffuser maintains its transparency and protects against long-term exposure to sunlight.

The light source is elegantly concealed by a discreet decorative cone, creating a soft, indirect light with high visual comfort and minimal glare. The reflector is integrated into the upper section of the luminaire and remains hidden from the side, reinforcing the clean architectural expression from every viewing angle.

LYKTEN WALL is available in a wide range of colour combinations, allowing both the luminaire housing and the decorative cone to be specified in different finishes. This provides extensive design flexibility, making it easy to complement the architecture of the building and its surroundings, whether installed in residential developments, commercial buildings, or public spaces.

Designed with longevity and ease of maintenance in mind, LYKTEN WALL features a modular construction that allows both the driver and the light source to be replaced. This extends the service life of the luminaire, reduces resource consumption, and minimises maintenance costs throughout its lifetime.

Housing, standard colours:

	RAL9007
	RAL7016
	RAL9005
	MARS2525

Inner cone, standard colours:

	RAL9010
	RAL9007
	RAL3003
	RAL9005
	RAL5003





PHOTOMETRIC DATA

LYKTEN WALL is a flexible wall-mounted luminaire, available in 10W or 21W, allowing the light output to be tailored to the specific installation. At maximum output (21W, 4000K), the luminaire delivers 1,321 lumens.

The luminaire is available as standard in 3000K or 4000K. The standard version is supplied with CRI70, while CRI80 is available for applications requiring enhanced colour rendering.

LYKTEN WALL provides soft, indirect and glare-free illumination, making it ideal for façades, entrance areas and other outdoor environments. With a lifetime of L90B10 90,000 hours, the luminaire is designed for reliable long-term operation with minimal maintenance.

LIGHT CONTROL

The wall-mounted luminaire is dimmable and supplied as standard with a built-in night dimming function, automatically reducing the light output to 50% between 22:00 and 06:00.

MECHANICAL DATA

LYKTEN WALL is manufactured from extruded and die-cast aluminium with stainless steel screws and a UV-resistant polycarbonate diffuser. The robust construction ensures excellent resistance to weather and environmental conditions and is rated IP67 for dust and water protection and IK10 for impact resistance.

The luminaire is supplied as Class II as standard and is also available in Class I upon request. The surface is finished with premium-quality coatings from Akzo Nobel.

LYKTEN WALL is available as standard in Grey (RAL 9007), Black (RAL 9005), Anthracite (RAL 7016) and Corten (MARS 2525).

The luminaire measures H: 330 mm and Ø: 305 mm and is supplied with an integrated driver featuring 10kV surge protection for enhanced reliability and long-term performance.

The wall-mounted design ensures simple and secure installation while complementing both contemporary and traditional architectural façades with its clean, timeless appearance.

