

LIGHT TECHNICAL DATA

Lumen output 3000K:	1280 / 1920 / 2560lm (4000K)
Efficiency 3000K:	122lm/W (3000K) / 128lm/W
Colour temperature:	3000K / 3500K / 4000K
Colour rendering:	CRI80
SDCM (MacAdam):	4
Lifetime:	L80B50 100.000 hours
Light distribution:	Direct
Beam angle:	120°

LIGHT CONTROL

Dimmable:	Yes
Dimming method:	Sensor
Emergency lighting:	No
Sensor:	Microwave

ELECTRICAL DATA

Voltage:	200-240V
Frequency:	50/60Hz
Power:	10 / 15 / 20W
Leakage current:	< 500 µA
Driver:	Intern




MECHANICAL DATA

Dimensions:	Ø:320 x H:57
Weight:	1,1kg
Material:	ABS
Diffuser:	PC
Luminaire color:	White
IP Rating:	IP54
IK class:	IK10
Insulation class:	Klasse II
Mounting type:	Surface mounted
Connection:	Plug in
Accessories:	-

91-0300-000011



PLEO is a modern and versatile ceiling fixture that combines functionality, energy efficiency and a simple Nordic design. With built in sensor.

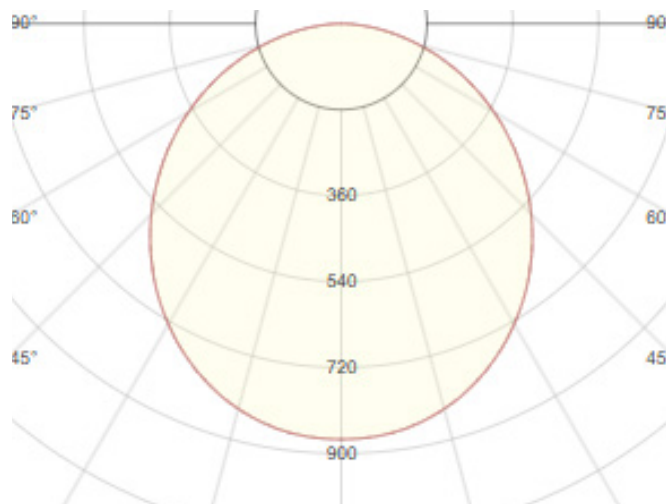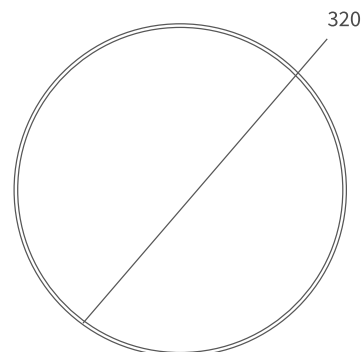

	B10	B13	B16	C10	C13	C16
10/15/20W	36	47	58	52	67	83