



ATTENTION!


Åbn ikke armaturet / Do not open fixture

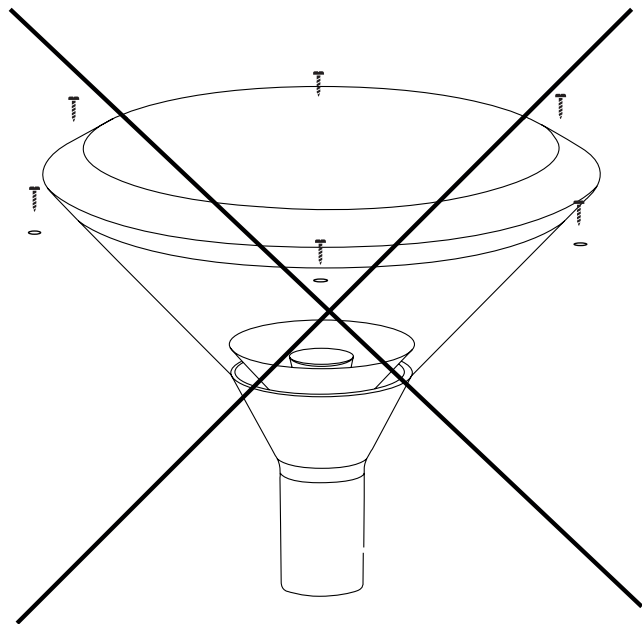

LYKTEN

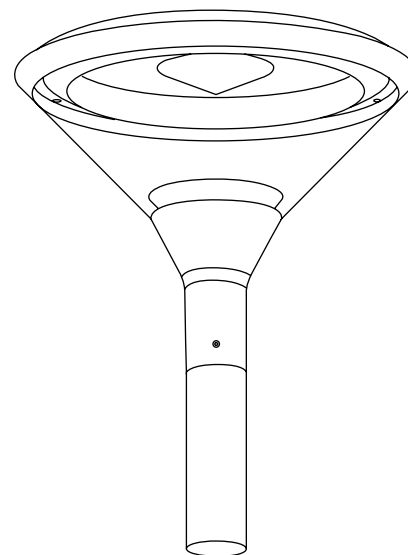

Ø89mm pole

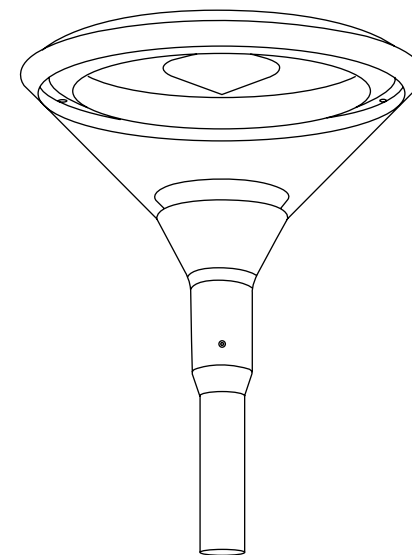


Ø60mm pole




LITE A/S • Østre Fælledvej 11, 9400 Nørresundby
+45 88 72 88 00 • info@lite-led.dk

DIMENSIONER / DIMENSIONS

Målenehed mm / All measurements in mm

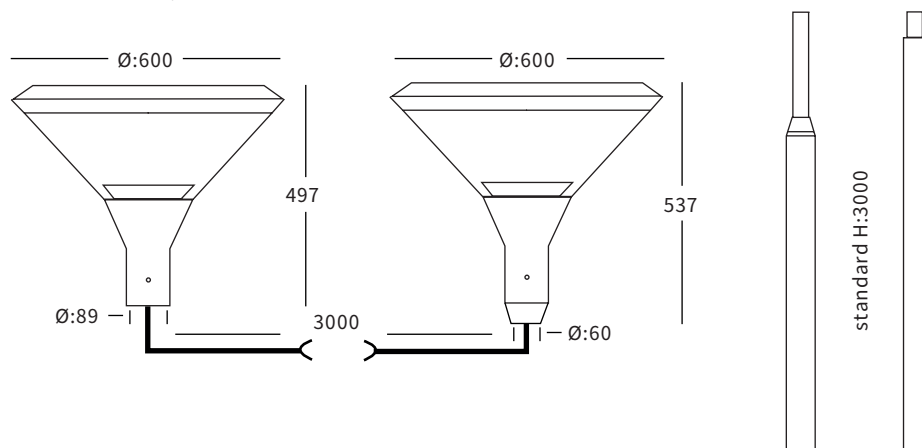

INSTALLATION FØRSKELLIGE MASTER / MOUNTING ON DIFFERENT POLES

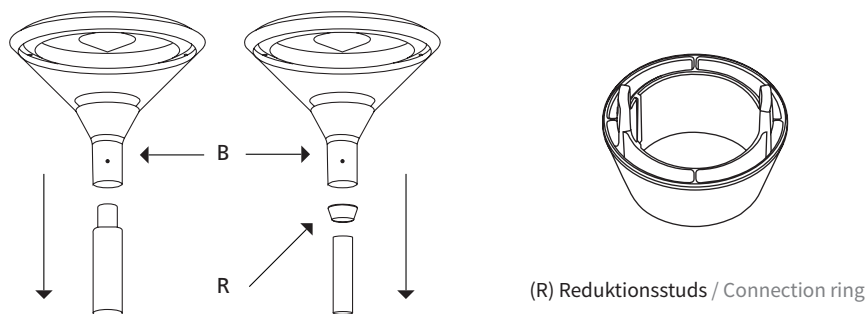

LYKTEN er designet til montering på forskellige master.

Hvis monteret på en Ø:60 mm stang: anbefales tilkøb og brug af reduktionsstuds (R), drej den koniske kant nedad.

For at montere på en Ø:89 mm stang med topør Ø:60 x H:60 mm placeres basen (B) direkte på stangen.


LYKTEN is designed for installation on different pole types.

If mounted on a Ø:60 mm pole: we recommend to buy and use connection ring (R), turning the conical edge downwards.


To install on a Ø:89 mm pole with top pipe Ø:60 x H:60 mm, place base (B) directly on pole.

INSTALLATION PLACERINGER / POSITIONS

Ø:60mm maste / pole

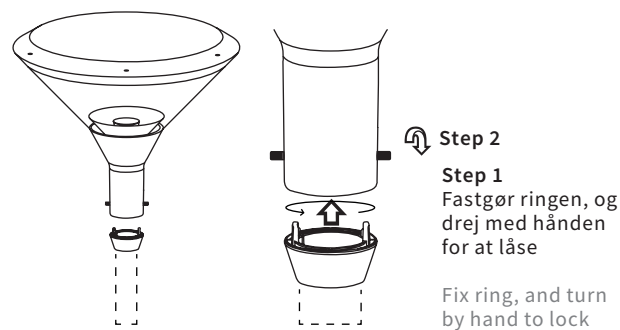


Ø:89mm maste / pole

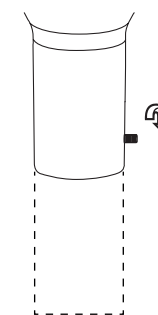

Standard screws included	
Ø:60mm pole	M8x16mm
Ø:89 mm pole	M8x16mm

Tools needed:



STRØMTILSLUTNING / POWER CONNECTION INFORMATION

