


HD DIGITAL BOX

Quick Start Connect Guide



The HD Digital Box can connect to both HD and SD TVs.

- 1** The first step for both connection options is to connect the Coax cable to the cable wall outlet and the Cable In connector on the HD Digital Box.
- 2** **Connect your TV.**
If you have a high-definition TV, use the HDMI connector.
If you have a standard-definition TV, use the RF OUT connector.
- 3** **Plug in the HD Digital Box.**
Connect the power cord to the HD Digital Box, then plug it into an unswitched electrical outlet. The HD Digital Box Power LED will cycle two times then power off. Use the Phazr-5 Cable Remote Control to Power On the HD Digital Box. Press CBL then Power.
- 4** **Turn on TV and select the input.**
If you have an HDTV, use the remote control that came with your TV to select the HDMI port you used to connect the HD Digital Box. If you have an SDTV, tune your TV to channel 3. If your screen remains black, switch your TV to CH 4.

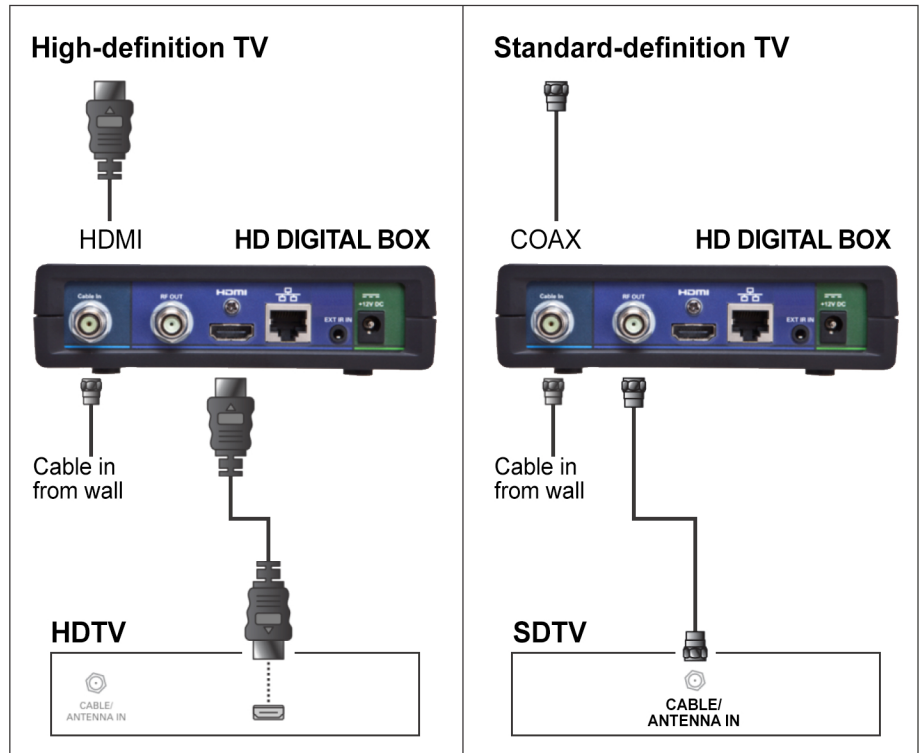

You should now begin to see video programming on your TV screen. Please allow about an hour for the on-screen channel guide to fully load.

Operating Instructions For **PHAZR-5** Cable Remote Control

URS1U-9000L & URS1U-9020L




The PHAZR-5 Cable Remote Control is pre-programmed to control the HD Digital Box, but you will need to program the remote to control your TV's on/off and volume functions by following these steps:

Before you program or operate the remote control, you must install two new AA alkaline batteries.

- 1** Turn On your TV using the remote control that came with your TV.
- 2** Use the printed instructions that came packaged with the PHAZR-5 remote to locate your TV's Manufacturer/Brand three-digit Set-Up Code Number by referring to section Six (Set-up Code Tables).
- 3** Press the TV and OK/SEL buttons simultaneously for three seconds. The TV LED button will turn on indicating that it is ready to be programmed. The TV LED will remain on for 30 seconds. The next step must be completed while the TV LED is on.
- 4** Point the Cable Remote Control toward the TV and enter the three-digit code number assigned to your TV brand from the code tables. If there are more than one three-digit number listed for your TV brand, try one code number at a time until your TV turns off. Store the three-digit code by pressing the TV button once again. The TV LED will blink twice to confirm that the code has been stored.

If you have any questions or would want to schedule a technician, please contact Customer Service at support@cablelynx.com or call us at 800-903-0508

IMPORTANT INSTRUCTIONS ON BACK

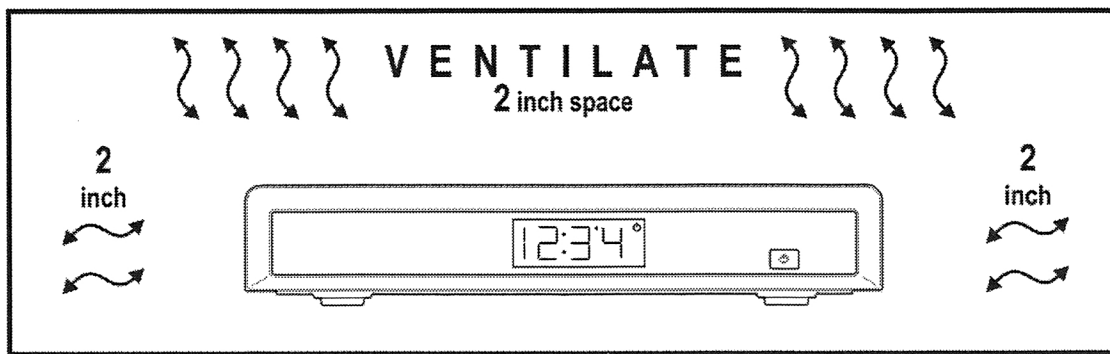

During Installation

- Do not place the terminal in an enclosed area where the cooling vents are blocked or impede the flow of air through the ventilation openings.
- Install the terminal so that its position does not interfere with its proper ventilation. For example, do not place the terminal on a bed, sofa, rug, or similar surface that could block the ventilation openings.
- Install the terminal away from heat sources such as radiators, heat registers and stoves. Installation of the terminal near consumer electronics devices, such as stereo receiver/amplifiers and televisions, is permitted as long as the air surrounding the terminal does not exceed 40° C (104° F).
- Place the terminal on a flat surface not prone to vibration or impact.
- Do not install the terminal in an area where condensation occurs.
- To prevent the temporary loss of guide data and cause a temporarily non-responding terminal, do not plug the AC power cord into a switched power outlet.