

SORT	RFT / UHP	UHP	H/P-A/S
	HF330	S2000	H202
PATTERN			
PERFORMANCE	   	   	   

SORT	H/P	H/T	4 SEASON
	S801	RS27	A4
PATTERN			
PERFORMANCE	   	   	   

SORT	H/P	Drifting	H/T
	H206	S3000	RS21
PATTERN			
PERFORMANCE	   	   	   


SORT	H/P	A/T	M/T
	RS26	RS23	RS25
PATTERN			
PERFORMANCE	   	   	   

SORT	VAN/LTR/TAXI	S/T	WINTER
	RS01	RS03	AW11
PATTERN			
PERFORMANCE	   	   	   

SORT	WINTER	WINTER	WINTER
	AW33	RW506	RW505
PATTERN			
PERFORMANCE	   	   	   



PERFORMANCE TESTING

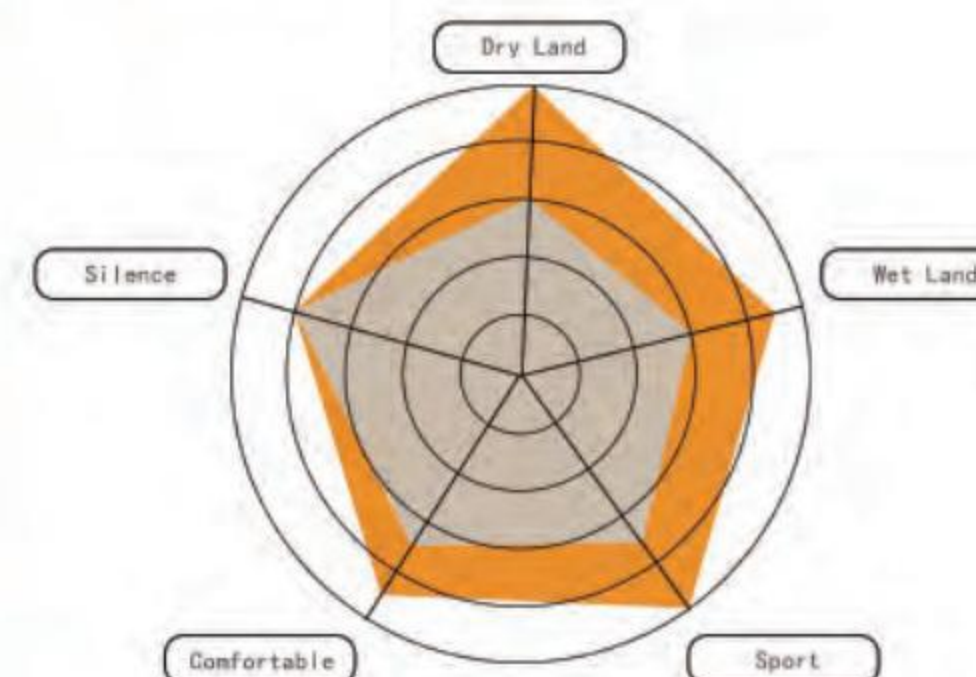


Run Flat Technology (RFT)




HF330

16/17/18/19/20/21


HF330 is a veritable super high-performance tire. The excellent handling is its label. The pattern and structure are optimized to improve comfortable. At the same time, The technology of RFT is used to ensure driving safety and make travel more safe and environmentally friendly.

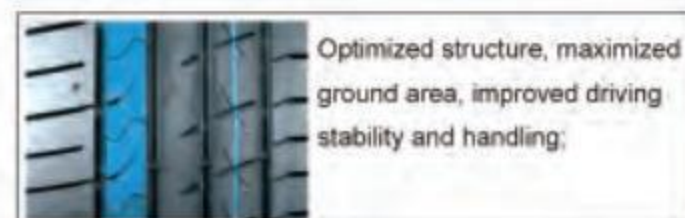


Optimized structure, maximized ground area, improved driving stability and handling;

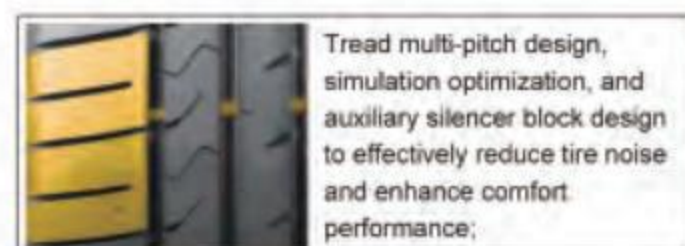

Tread multi-pitch design, simulation optimization, and auxiliary silencer block design to effectively reduce tire noise and enhance comfort performance;

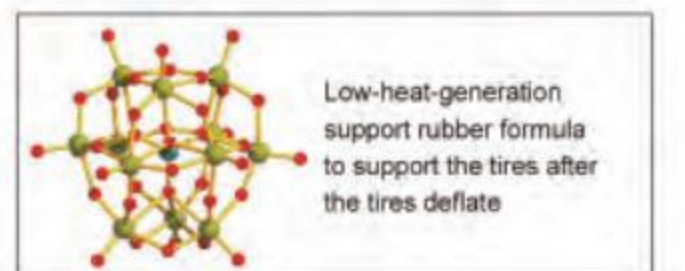

Low-heat-generation support rubber formula to support the tires after the tires deflate

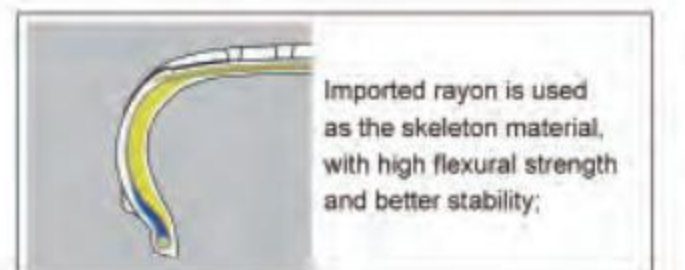

Imported rayon is used as the skeleton material, with high flexural strength and better stability;



HF330 RFT

SIZE					LI/SS	XL	STANDARD RM	MAX LOAD	MAX PRESS	OUTER DIAMETER	SECTION WIDTH	REMARKS
							inch	kg	kPa	mm	mm	
195	/	55	RF	16	91V	XL	6.0	615	340	620	201	
205	/	55	ZRF	16	94W	XL	6.5	670	340	632	214	
205	/	45	ZRF	17	88W	XL	7.0	560	340	616	206	
225	/	45	ZRF	17	94W	XL	7.5	670	340	634	225	
225	/	50	ZRF	17	98W	XL	7.0	750	340	658	233	
225	/	55	ZRF	17	101W	XL	7.0	825	340	680	233	
225	/	40	ZRF	18	92W	XL	8.0	630	340	637	230	
225	/	45	ZRF	18	95W	XL	7.5	690	340	659	225	
225	/	50	ZRF	18	99W	XL	7.0	775	340	683	233	
245	/	40	ZRF	18	97W	XL	8.5	730	340	653	248	
245	/	45	ZRF	18	100W	XL	8.0	800	340	677	243	
245	/	50	ZRF	18	104W	XL	7.5	900	340	703	253	
255	/	35	ZRF	18	94Y	XL	9.0	670	340	635	260	
255	/	40	ZRF	18	99Y	XL	9.0	775	340	661	260	
255	/	45	ZRF	18	103W	XL	8.5	875	340	687	255	
255	/	55	ZRF	18	109W	XL	8.0	1030	340	737	265	
235	/	45	ZRF	19	99Y	XL	8.0	775	340	695	236	
235	/	50	ZRF	19	103W	XL	7.5	875	340	719	245	
235	/	55	ZRF	19	105W	XL	7.5	925	340	741	245	
245	/	40	ZRF	19	98Y	XL	8.5	750	340	679	248	
245	/	45	ZRF	19	102Y	XL	8.0	850	340	703	243	
245	/	50	ZRF	19	105W	XL	7.5	925	340	729	253	
255	/	45	ZRF	19	104W	XL	8.5	900	340	713	255	
255	/	50	ZRF	19	107W	XL	8.0	975	340	739	265	
275	/	35	ZRF	19	100Y	XL	9.5	800	340	675	278	
275	/	40	ZRF	19	105W	XL	9.5	925	340	703	278	
245	/	40	ZRF	20	99Y	XL	8.5	775	340	704	248	
245	/	45	ZRF	20	103Y	XL	8.0	875	340	728	243	
275	/	40	ZRF	20	106W	XL	9.5	950	340	728	278	
315	/	35	ZRF	20	110Y	XL	11	1060	340	728	320	



Summer UHP



S2000
16/17/18/19/20

S2000 seeks exercise limit and extreme experience. The excellen high speed ability,handling in both dry and wet conditions,security and green design,make it to be preferred choice for luxury cars,Her stable performance is worthy of your trust.



Special asymmetrical design provides excellent grip and handling in both dry wet conditions.



The updated SSBP and silica compound provide excellent wet grip,much reduced rolling resistance,and terrific handling in high speed.



Sipes on outside shoulder enhance turning handling and low down noise in high speed.



The dramatic2 central big grooves with special compound,enhances efficient water evacuation to deal with all conditions



HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

S2000 Summer UHP

Size					LI&SS	/XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
195	/	45	R	16	84V	XL	6.5	500	340	582	195	
195	/	50	R	16	88V	XL	6.0	560	340	602	201	
195	/	55	R	16	91V	XL	6.0	615	340	620	201	
205	/	45	ZR	16	87W	XL	7.0	545	340	590	206	
205	/	50	ZR	16	91W	XL	6.5	615	340	612	214	
205	/	55	ZR	16			6.5	615	300	632	214	
205	/	55	ZR	16	94W	XL	6.5	670	340	632	214	
215	/	45	ZR	16	90W	XL	7.0	600	340	600	213	
215	/	55	ZR	16	97W	XL	7.0	730	340	642	226	
225	/	50	ZR	16	96W	XL	7.0	710	340	632	233	
225	/	55	ZR	16	99W	XL	7.0	775	340	654	233	
205	/	40	ZR	17	84W	XL	7.5	500	340	596	212	
205	/	45	ZR	17	88W	XL	7.0	560	340	616	206	
205	/	50	ZR	17	93Y	XL	6.5	650	340	638	214	
215	/	40	ZR	17	87W	XL	7.5	545	340	604	218	
215	/	45	ZR	17	91W	XL	7.0	615	340	626	213	
215	/	50	ZR	17	95W	XL	7.0	690	340	648	226	
215	/	55	ZR	17	98W	XL	7.0	750	340	668	226	
225	/	45	ZR	17	94W	XL	7.5	670	340	634	225	
225	/	50	ZR	17	98W	XL	7.0	750	340	658	233	
225	/	55	ZR	17	101W	XL	7.0	825	340	680	233	
235	/	45	ZR	17	97W	XL	8.0	730	340	644	236	
235	/	50	ZR	17	100W	XL	7.5	800	340	668	245	
235	/	55	ZR	17	103W	XL	7.5	875	340	690	245	
245	/	40	ZR	17	95W	XL	8.5	690	340	628	248	
245	/	45	ZR	17	99W	XL	8.0	775	340	652	243	
255	/	45	ZR	17	102Y	XL	8.5	850	340	662	255	
215	/	35	ZR	18	84Y	XL	7.5	500	340	607	218	
215	/	40	ZR	18	89Y	XL	7.5	580	340	629	218	
215	/	45	ZR	18	93W	XL	7.0	650	340	651	213	
225	/	40	ZR	18	92W	XL	8.0	630	340	637	230	
225	/	45	ZR	18	95W	XL	7.5	690	340	659	225	
235	/	40	ZR	18			8.5	690	340	645	241	
235	/	45	ZR	18	98W	XL	8.0	750	340	669	236	
235	/	50	ZR	18	101W	XL	7.5	825	340	693	245	
245	/	40	ZR	18	97W	XL	8.5	730	340	653	248	
245	/	45	ZR	18	100W	XL	8.0	800	340	677	243	
255	/	35	ZR	18	94Y	XL	9.0	670	340	635	260	
255	/	40	ZR	18	99Y	XL	9.0	775	340	661	260	
255	/	45	ZR	18	103W	XL	8.5	875	340	687	255	
265	/	35	ZR	18	97Y	XL	9.5	730	340	643	271	
225	/	35	ZR	19	88Y	XL	8.0	560	340	641	230	
235	/	35	ZR	19	91W	XL	8.5	615	340	647	241	
235	/	45	ZR	19	99Y	XL	8.0	775	340	695	236	
245	/	35	ZR	19	93W	XL	8.5	650	340	655	248	
245	/	40	ZR	19	98Y	XL	8.5	750	340	679	248	
245	/	45	ZR	19	102Y	XL	8.0	850	340	703	243	
255	/	35	ZR	19	96Y	XL	9.0	710	340	661	260	
225	/	35	ZR	20	90W	XL	8.0	600	340	666	230	
235	/	35	ZR	20	92W	XL	8.5	630	340	672	241	
245	/	35	ZR	20	95W	XL	8.5	690	340	680	248	
245	/	40	ZR	20	99Y	XL	8.5	775	340	704	248	
245	/	45	ZR	20	103Y	XL	8.0	875	340	728	243	
255	/	35	ZR	20	97W	XL	9.0	730	340	686	260	



Summer UHP



HF330

16/17/18/19/20/21


HF330 is a veritable super high-performance tire. The excellent handling is its label. The pattern and structure are optimized to improve comfortable. At the same time, The technology of RFT is used to ensure driving safety and make travel more safe and environmentally friendly.



Optimized structure, maximized ground area, improved driving stability and handling;



Tread multi-pitch design, simulation optimization, and auxiliary silencer block design to effectively reduce tire noise and enhance comfort performance;



High-grip silicon-containing formula provides better dry / wet road traction, and lower rolling resistance, saving energy and environmental protection;



The widened groove design improves drainage and prevents skidding when driving in rainy weather, improving safety,



HF330 Summer UHP

SIZE					LI/SS	XL	STANDARD	MAX	MAX	OUTER	SECTION	REMARKS
							RIM	LOAD	PRESS	DIAMETER	WIDTH	
							inch	kg	kPa	mm	mm	
195	/	55	R	16	91V	XL	6.0	615	340	620	201	
205	/	55	ZR	16	94W	XL	6.5	670	340	632	214	
205	/	40	ZR	17	84W	XL	7.5	500	340	596	212	
205	/	45	ZR	17	88W	XL	7.0	560	340	616	206	
205	/	50	ZR	17	93W	XL	6.5	650	340	638	214	
215	/	40	ZR	17	87W	XL	7.5	545	340	604	218	
215	/	45	ZR	17	91W	XL	7.0	615	340	626	213	
215	/	50	ZR	17	95W	XL	7.0	690	340	648	226	
215	/	55	ZR	17	98W	XL	7.0	750	340	668	226	
225	/	45	ZR	17	94W	XL	7.5	670	340	634	225	
225	/	50	ZR	17	98W	XL	7.0	750	340	658	233	
225	/	55	ZR	17	101W	XL	7.0	825	340	680	233	
235	/	45	ZR	17	97W	XL	8.0	730	340	644	236	
235	/	50	ZR	17	100W	XL	7.5	800	340	668	245	
235	/	55	ZR	17	103W	XL	7.5	875	340	690	245	
245	/	40	ZR	17	95W	XL	8.5	690	340	628	248	
245	/	45	ZR	17	99W	XL	8.0	775	340	652	243	
255	/	45	ZR	17	102Y	XL	8.5	850	340	662	255	
215	/	40	ZR	18	89Y	XL	7.5	580	340	629	218	
215	/	45	ZR	18	93W	XL	7.0	650	340	651	213	
225	/	40	ZR	18	92W	XL	8.0	630	340	637	230	
225	/	45	ZR	18	95W	XL	7.5	690	340	659	225	
225	/	50	ZR	18	99W	XL	7.0	775	340	683	233	
235	/	40	ZR	18	95W	XL	8.5	690	340	645	241	
235	/	45	ZR	18	98W	XL	8.0	750	340	669	236	
235	/	50	ZR	18	101W	XL	7.5	825	340	693	245	
245	/	40	ZR	18	97W	XL	8.5	730	340	653	248	
245	/	45	ZR	18	100W	XL	8.0	800	340	677	243	
245	/	50	ZR	18	104W	XL	7.5	900	340	703	253	
255	/	35	ZR	18	94Y	XL	9.0	670	340	635	260	
255	/	40	ZR	18	99Y	XL	9.0	775	340	661	260	
255	/	45	ZR	18	103W	XL	8.5	875	340	687	255	
255	/	55	ZR	18	109W	XL	8.0	1030	340	737	265	
265	/	35	ZR	18	97Y	XL	9.5	730	340	643	271	
235	/	35	ZR	19	91W	XL	8.5	615	340	647	241	
235	/	45	ZR	19	99Y	XL	8.0	775	340	695	236	
235	/	50	ZR	19	103W	XL	7.5	875	340	719	245	
235	/	55	ZR	19	105W	XL	7.5	925	340	741	245	
245	/	35	ZR	19	93W	XL	8.5	650	340	655	248	
245	/	40	ZR	19	98Y	XL	8.5	750	340	679	248	
245	/	45	ZR	19	102Y	XL	8.0	850	340	703	243	
245	/	50	ZR	19	105W	XL	7.5	925	340	729	253	
255	/	35	ZR	19	96Y	XL	9.0	710	340	661	260	
255	/	45	ZR	19	104W	XL	8.5	900	340	713	255	
255	/	50	ZR	19	107W	XL	8.0	975	340	739	265	
275	/	35	ZR	19	100Y	XL	9.5	800	340	675	278	
275	/	40	ZR	19	105W	XL	9.5	925	340	703	278	
245	/	40	ZR	20	99Y	XL	8.5	775	340	704	248	
245	/	45	ZR	20	103Y	XL	8.0	875	340	728	243	
275	/	40	ZR	20	106W	XL	9.5	950	340	728	278	
315	/	35	ZR	20	110Y	XL	11.0	1060	340	728	320	
275	/	40	ZR	21	107Y	XL	9.5	975	340	753	278	
315	/	35	ZR	21	111Y	XL	11.0	1090	340	753	320	



ComfortMax AS




Comfortable Fuel-efficient Quiet Safe

H202

12/13/14/15/17/18

H202 is specially designed for private car users. The reasonable pattern pitch arrangement and special block design make it have extraordinary silence and excellent wet and dry grip. Its silicon-containing special formula reduces the rolling resistance coefficient, which is more environmentally friendly and fuel efficient. The optimized structural design improves the comfort of the tires and allows you to enjoy a beautiful car life!

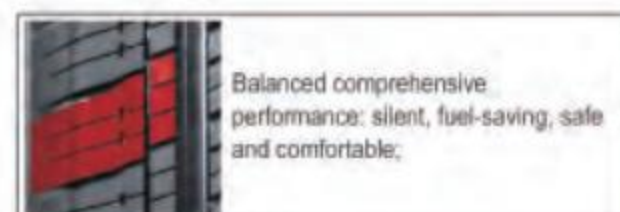


Balanced comprehensive performance: silent, fuel-saving, safe and comfortable;




Excellent fuel-saving ability of silicon-containing formula, economical and money-saving;



Four seasons tire design;

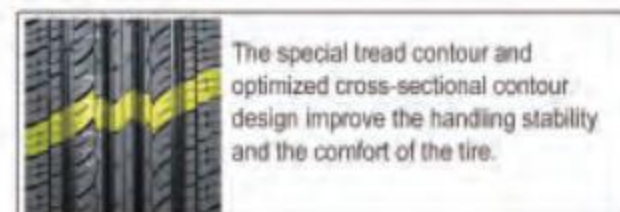

The special tread contour and optimized cross-sectional contour design improve the handling stability and the comfort of the tire.

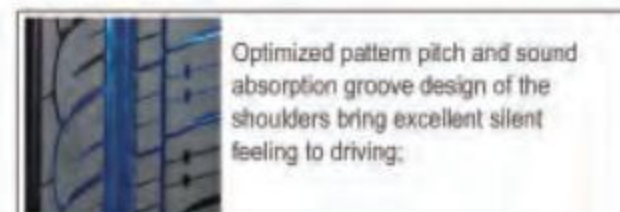

Optimized pattern pitch and sound absorption groove design of the shoulders bring excellent silent feeling to driving;



H202 ComfortMax AS

SIZE					L/SS	XL	STANDARD RIM	MAX LOAD	MAX PRESS	OUTER DIAMETER	SECTION WIDTH	REMARKS
							inch	kg	kPa	mm	mm	
145	/	70	R	12	69T		4.5	325	300	509	150	
155	/	70	R	12	73T		4.5	365	300	523	157	
165	/	70	R	12	77T		5.0	412	300	537	170	
155	/	70	R	13	75T		4.5	387	300	548	157	
165	/	65	R	13	77T		5.0	412	300	544	170	
165	/	70	R	13	79T		5.0	437	300	562	170	
165	/	70	R	13	83T	XL	5.0	487	340	562	170	
175	/	70	R	13	82T		5.0	475	300	576	177	
185	/	70	R	13	86T		5.5	530	300	590	189	
155	/	65	R	14	75T		4.5	387	300	558	157	
165	/	60	R	14	75T		5.0	387	300	554	170	
165	/	65	R	14	79H		5.0	437	300	570	170	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	86T	XL	5.0	530	300	584	177	
175	/	70	R	14	84H		5.0	500	300	602	177	
185	/	60	R	14	82H		5.5	475	300	578	189	
185	/	65	R	14	86H		5.5	530	300	596	189	
195	/	60	R	14	86H		6.0	530	300	590	201	
205	/	60	R	14	88H		6.0	560	300	602	209	
205	/	70	R	14	95H		6.0	690	300	644	209	
215	/	70	R	14	96H		6.5	710	300	658	221	
165	/	55	R	15	75H		5.0	387	300	563	170	
175	/	55	R	15	77H		5.5	412	300	573	182	
175	/	60	R	15	81H		5.0	462	300	591	177	
175	/	65	R	15	84H		5.0	500	300	609	177	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	55	R	15	85V		6.0	515	300	595	201	
195	/	60	R	15	88V		6.0	560	300	615	201	
195	/	65	R	15	95H	XL	6.0	690	340	635	201	
205	/	60	R	15	91V		6.0	615	300	627	209	
205	/	65	R	15	94H		6.0	670	300	647	209	
215	/	60	R	15	94V		6.5	670	300	639	221	
215	/	65	R	15	96V		6.5	710	300	661	221	
195	/	60	R	16	89H		6.0	580	300	640	201	
205	/	45	R	16	87V	XL	6.0	545	340	590	206	
205	/	55	R	16	91V		6.5	615	300	632	214	
205	/	60	R	16	96H	XL	6.0	710	340	652	209	
205	/	65	R	16	95H		6.0	690	300	672	209	
215	/	60	R	16	99H	XL	6.5	775	340	664	221	
215	/	65	R	16	98H		6.5	750	300	686	221	
225	/	60	R	16	98H		6.5	750	300	676	228	
225	/	70	R	16	103T		6.5	875	300	722	228	
215	/	60	R	17	96H		6.5	710	300	690	221	
225	/	65	R	17	102H		6.5	850	300	724	228	
225	/	60	R	18	100H		6.5	800	300	727	228	



Summer H/P

S801
14/15/16/17

S801 is designed especially for successful people. The advanced asymmetrical tread design brings super silence, excellent grip in wet and dry conditions, handling, and uncommon driving experiences. The silica compound delivers reduced rolling resistance for better fuel efficiency. Sizes from 13" to 17" meet your different demand.



Balanced performance:
Stability, Silence,
Security, Mileage



Asymmetrical tread design
provides excellent grip and
handling.



Strong block tread design
improves mileage, stability,
and security.



Silica compound delivers
reduced rolling resistance for
better fuel efficiency.



HABILEAD TIRE • PURSUE PERFECTION • ENJOY DRIVING

S801 Summer H/P

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
165	/	60	R	14	75T		5.0	387	300	554	170	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	82H		5.0	475	300	584	177	
175	/	70	R	14	84H		5.0	500	300	602	177	
185	/	60	R	14	82H		5.5	475	300	578	189	
185	/	65	R	14	86H		5.5	530	300	596	189	
185	/	70	R	14	88H		5.5	560	300	616	189	
195	/	60	R	14	86H		6.0	530	300	590	201	
195	/	70	R	14	91T		6.0	615	300	630	201	
195	/	70	R	14	91H		6.0	615	300	630	201	
195	/	70	R	14	95T	XL	6.0	690	340	630	201	
185	/	55	R	15	82V		6.0	475	300	585	194	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	60	R	15	88H	XL	5.5	560	340	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
185	/	65	R	15	92H	XL	5.5	630	340	621	189	
195	/	50	R	15	82V		6.0	475	300	577	201	
195	/	55	R	15	85V		6.0	515	300	595	201	
195	/	60	R	15	88V		6.0	560	300	615	201	
195	/	65	R	15	91V		6.0	615	300	635	201	
195	/	65	R	15	95H	XL	6.0	690	340	635	201	
205	/	65	R	15	94V		6.0	670	300	647	209	
215	/	65	R	15	96H		6.5	710	300	661	221	
215	/	65	R	15	100H	XL	6.5	800	340	661	221	
205	/	50	R	16	87V		6.5	545	300	612	214	
205	/	55	R	16	91V		6.5	615	300	632	214	
205	/	60	R	16	92V		6.0	630	300	652	209	
205	/	60	R	16	96H	XL	6.0	710	340	652	209	
215	/	60	R	16	95V		6.5	690	300	664	221	
215	/	60	R	16	99H	XL	6.5	775	340	664	221	
215	/	65	R	16	98H		6.5	750	300	686	221	
225	/	55	R	16	95V		7.0	690	300	654	233	
225	/	60	R	16	98H		6.5	750	300	676	228	
225	/	60	R	17	99H		6.5	775	300	702	228	
225	/	65	R	17	102H		6.5	850	300	724	228	



PracticalMax A/T



RS23
15/16/17/18/20


RS23 is a SUV tire suitable for all road conditions. While satisfying the performance of paved roads, it highlights the grip and sports performance of non-paved roads such as mountain roads, dirt roads and snow roads. The tiger-tooth pattern design provides powerful off-road performance for the car, and the use of a cut-resistant formula greatly improves the life of the tire pattern.




Tiger tooth-shaped three-dimensional block provides excellent grip performance on paved and non-paved roads;



The mixed pattern groove design guarantees the grip of mountain roads, mud and snow roads;



Special shoulder reinforcement design to prevent non-paved road from damaging the tires and bring you endless driving experience;




The irregular groove design guarantees the grip and strong off-road ability of non-paved roads;



HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

PERFORMANCE TESTING

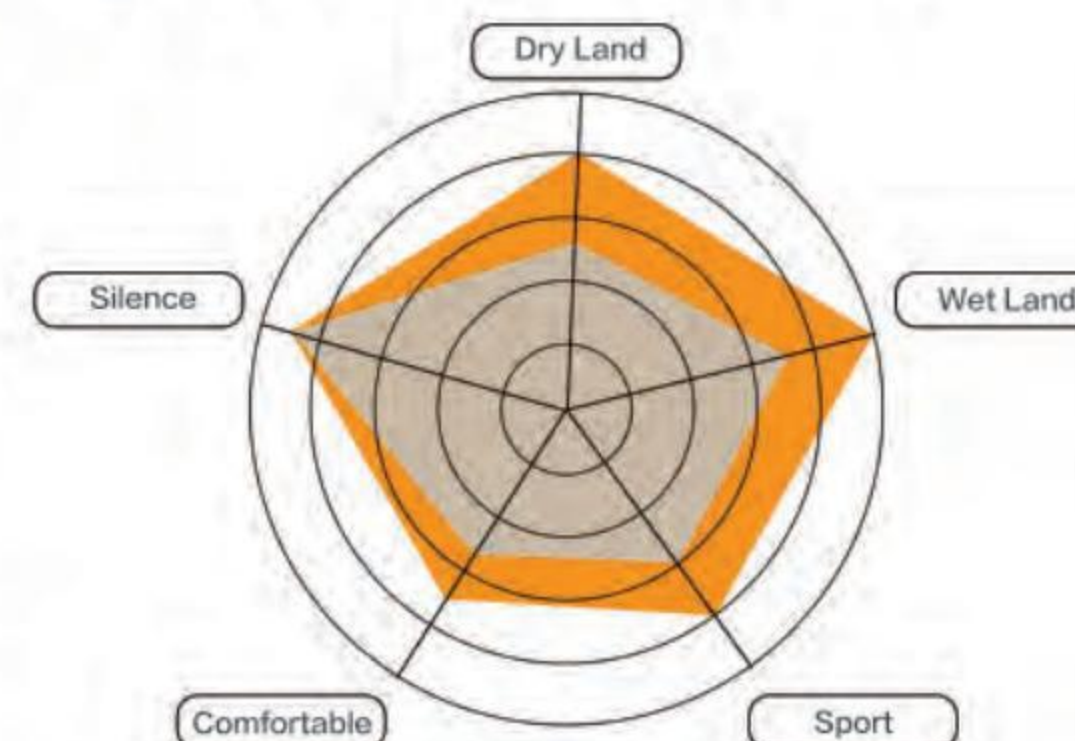

[Tire Shoulder Scratch Resistance Design] Improves puncture resistance and scratch resistance.



[Tread Convex White Letter Design] Make the tire appearance eye-catching, beautiful and fashionable

RS23 PracticalMax A/T

SIZE					LI/SS	XL	STANDARD RIM	MAX LOAD	MAX PRESS	OUTER DIAMETER	SECTION WIDTH	REMARKS
							inch	kg	kPa	mm	mm	
215	/	70	R	16	100T		6.5	800	300	708	221	
225	/	70	R	16	103T		6.5	875	300	722	228	
235	/	70	R	16	106T		7.0	950	300	736	240	
245	/	70	R	16	111T	XL	7.0	1090	340	750	248	
255	/	70	R	16	111T		7.5	1090	300	764	260	
275	/	70	R	16	114T		8.0	1180	300	792	279	
245	/	70	R	17	110S		7.0	1060	300	776	248	
255	/	65	R	17	110T		7.5	1060	300	764	260	
265	/	65	R	17	112T		8.0	1120	300	776	272	
275	/	65	R	17	119S	XL	8.0	1360	340	790	279	
285	/	65	R	17	116S		8.5	1250	300	802	292	
265	/	60	R	18	110T		8.0	1060	300	775	272	
285	/	60	R	18	116H		8.5	1250	300	799	292	
285	/	50	R	20	116Q	XL	9.0	1250	340	794	297	
31	x	10.5	R	15	109S		8.5	1030	350	775	268	
215	/	75	R	15	100/97S		6.0	800/730	350	703	216	
225	/	75	R	15	102/99S		6.0	850/775	350	719	223	
235	/	75	R	15	104/101S		6.5	900/825	350	733	235	
215	/	85	R	16	115/112S		6.0	1215/1120	550	772	216	
225	/	75	R	16	115/112S		6.0	1215/1120	550	744	223	
235	/	70	R	16	110/107S		7.0	1060/975	450	736	240	
235	/	85	R	16	120/116S		6.5	1400/1250	550	806	235	
245	/	75	R	16	120/116S		7.0	1400/1250	550	774	248	
265	/	70	R	16	117/114T		8.0	1285/1180	450	778	272	
265	/	70	R	17	121/118S		8.0	1450/1320	550	804	272	
265	/	65	R	17	120/117S		8.0	1400/1285	550	776	272	
265	/	75	R	16	123/120S		7.5	1550/1400	550	804	267	
285	/	75	R	16	126/123S		8.0	1700/1550	550	834	286	



RS25
15/16/17

RS25 is a special tire for off-road vehicles suitable for non-paved roads. It provides super driving force, grip, dirt road anti-skid performance, and excellent handling for off-road families. Its must-have for the off-road family in the worst of road conditions.



The optimized combination design of huge blocks and grooves provides excellent driving force, grip and anti-skid performance on non-paved roads;



Single winding hexagonal bead design, which greatly improves the durability stability of the tire bead.



The double-layer reinforced belt layer and the special specification three-layer reinforced carcass design greatly improve the overall strength of the tire and catch the requirements of the worst road conditions;




胎肩花纹沟特殊的保护坝设计以及粗犷的胎肩加强设计，提高胎肩抗撞击能力，因而极大的提高耐久性能；



HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

PERFORMANCE TESTING

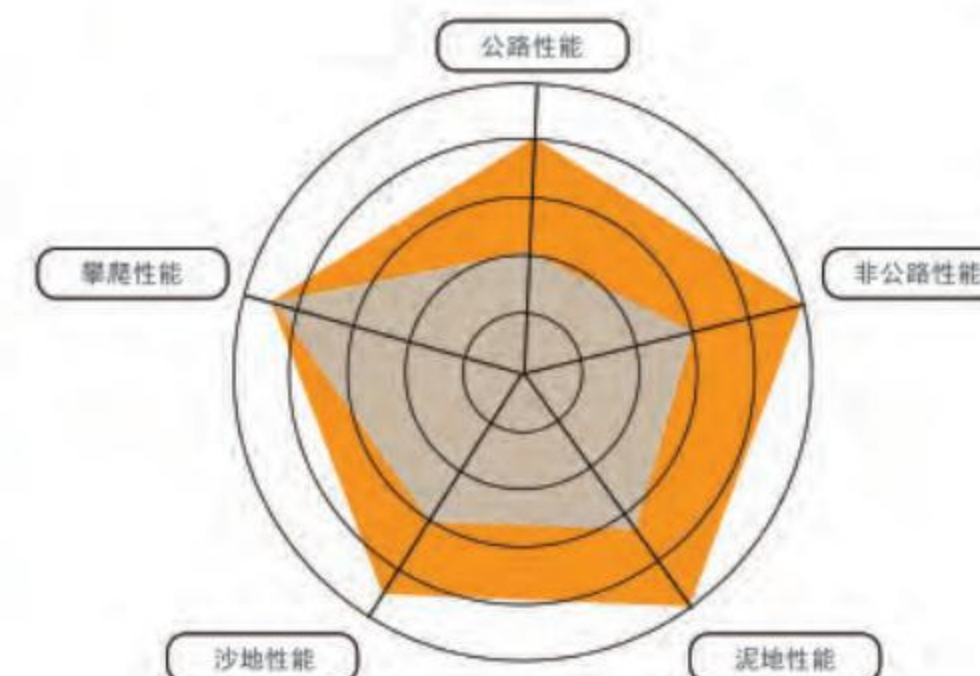

[Tread Convex White Letter Design] Make the tire appearance eye-catching, beautiful and fashionable



[Tire Shoulder Scratch Resistance Design] Improves puncture resistance and scratch resistance.

RS25 PracticalMax MT

SIZE					LI/SS	XL	STANDARD RIM	MAX LOAD	MAX PRESS	OUTER DIAMETER	SECTION WIDTH	REMARKS
							inch	kg	kPa	mm	mm	
31	x	10.5	R	15	109Q		8.5	1030	350	775	268	
235	/	85	R	16	120/116Q		6.5	1400/1250	550	806	235	
245	/	70	R	16	106/103Q		7.0	950/875	350	750	248	
245	/	75	R	16	120/116Q		7.0	1400/1250	550	774	248	
265	/	70	R	16	117/114Q		8.0	1285/1180	450	778	272	
245	/	65	R	17	111/108Q		7.0	1090/1000	450	750	248	
265	/	65	R	17	120/117Q		8.0	1400/1285	550	772	276	
265	/	70	R	17	121/118Q		8.0	1450/1320	550	804	272	
265	/	75	R	16	123/120Q		7.5	1550/1400	550	804	267	
285	/	75	R	16	126/123Q		8.0	1700/1550	550	834	286	



PracticalMax H/T



RS21
15/16/17/18

RS21 is specially designed for the king who constantly pursues sports extremes and enjoys the ultimate driving experience. With its excellent high-speed driving ability, excellent wet and dry road handling performance, and the introduction of safe, environmentally friendly design concepts, consistent and stable performance, it is worthy of your full trust!



The grooved step-like design prevents stones from being trapped when driving on country roads.



Rigid and uniform block design, combined with the continuous central ribs, can improve the stability of the tire in straight running.



Decorative three-dimensional step design of shoulder, beautiful and heat dissipation.



The four main grooves cooperate with the horizontal grooves to provide excellent drainage performance and ensure the safety of driving in heavy rain.





The design of curved fine grooves greatly reduces the water film between the road surface and the tire in rainy days, and prevents the occurrence of water sliding.



HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

PERFORMANCE TESTING

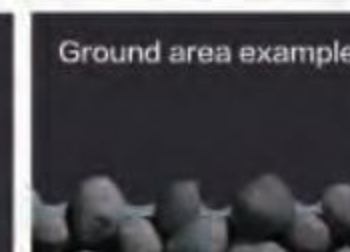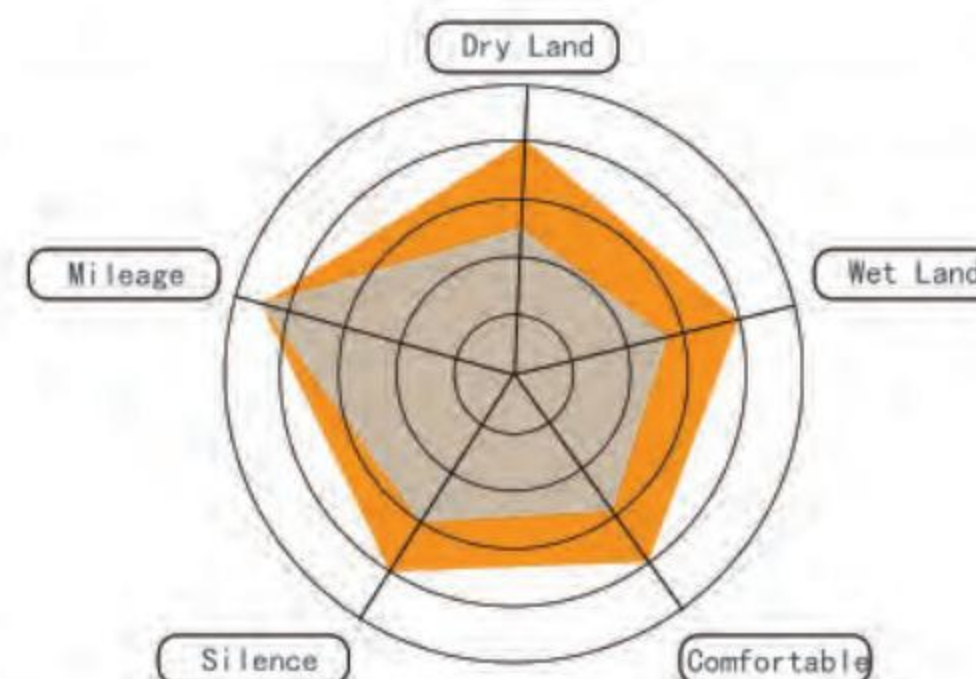

The latest formula of polybutadiene and silicon-containing technology makes the grounding area more compact; effectively improves wetland performance, reduces rolling resistance, and provides excellent handling performance.

3D pattern groove design, optimized combination of shoulder pattern design, providing comfortable driving experience.

RS21 PracticalMax H/T

SIZE					LI/SS	XL	STANDARD RIM	MAX LOAD	MAX PRESS	OUTER DIAMETER	SECTION WIDTH	REMARKS
							inch	kg	kPa	mm	mm	
235	/	75	R	15	105H		6.5	925	300	733	235	
215	/	70	R	16	100H		6.5	800	300	708	221	
225	/	70	R	16	103H		6.5	875	300	722	228	
235	/	60	R	16	100H		7.0	800	300	688	240	
235	/	70	R	16	106H		7.0	950	300	736	240	
245	/	70	R	16	111H	XL	7.0	1090	340	750	248	
255	/	70	R	16	111H		7.5	1090	300	764	260	
265	/	70	R	16	112H		8.0	1120	300	778	272	
265	/	75	R	16	116H		7.5	1250	300	804	267	
275	/	70	R	16	114H		8.0	1180	300	792	279	
215	/	50	R	17	95H	XL	7.0	690	340	648	226	
215	/	65	R	17	99H		6.5	775	300	712	221	
225	/	60	R	17	99H		6.5	775	300	702	228	
225	/	65	R	17	102H		6.5	850	300	724	228	
235	/	55	R	17	99H		7.5	775	300	690	245	
235	/	60	R	17	106H	XL	7.0	950	340	714	240	
235	/	65	R	17	108H	XL	7.0	1000	340	738	240	
245	/	65	R	17	111H	XL	7.0	1090	340	750	248	
265	/	65	R	17	112H		8.0	1120	300	776	272	
265	/	70	R	17	115H		8.0	1215	300	804	272	
225	/	60	R	18	100H		6.5	800	300	727	228	
235	/	50	R	18	101H	XL	7.5	825	340	693	245	
235	/	55	R	18	104H	XL	7.5	900	340	715	245	
235	/	60	R	18	107H	XL	7.0	975	340	739	240	
255	/	55	R	18	109V	XL	8.0	1030	340	737	265	
265	/	60	R	18	114V	XL	8.0	1180	340	775	272	



PracticalMax H/P



RS26

17/18/19/20/21/22

RS26 is a top-end luxury tire specially developed for SUVs, which enables your car to have sports car-like handling, high stability and luxury car-like comfort under a variety of road conditions.



Semi-closed groove design on both sides of the tread, lower noise;



Adopting the gradual groove depth design, the pattern block is strong; the stability of the shoulder can optimize the dry grip of the tire;



The asymmetrical pattern design makes the tires have superior grip and braking performance, and better handling.



The wide pattern groove design improves drainage performance and effectively avoids tire slippage on wet roads.



HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

RS26 PracticalMax H/P

SIZE					LI/SS	XL	STANDARD RIM	MAX LOAD	MAX PRESS	OUTER DIAMETER	SECTION WIDTH	REMARKS
							inch	kg	kPa	mm	mm	
235	/	55	ZR	17	103W	XL	7.5	875	340	690	245	
235	/	65	R	17	108V	XL	7.0	1000	340	738	240	
215	/	55	R	18	99W	XL	7.0	775	340	693	226	
225	/	55	ZR	18	102W	XL	7.0	850	340	705	233	
235	/	50	ZR	18	101W	XL	7.5	825	340	693	245	
235	/	55	ZR	18	104W	XL	7.5	900	340	715	245	
255	/	55	R	18	109W	XL	8.0	1030	340	737	265	
255	/	60	R	18	112V	XL	7.5	1120	340	763	260	
225	/	45	R	19	96W	XL	7.5	710	340	685	225	
255	/	50	R	19	107W	XL	8.0	975	340	739	265	
255	/	55	R	19	111W	XL	8.0	1090	340	763	265	
275	/	30	ZR	19	96Y	XL	9.5	710	340	649	278	
275	/	35	ZR	19	100Y	XL	9.5	800	340	675	278	
285	/	45	R	19	111W	XL	9.5	1090	340	739	285	
235	/	45	ZR	20	100W	XL	8.0	800	340	720	236	
245	/	35	ZR	20	95W	XL	8.5	690	340	680	248	
245	/	40	ZR	20	99Y	XL	8.5	775	340	704	248	
245	/	45	ZR	20	103Y	XL	8.0	875	340	728	243	
245	/	50	ZR	20	102Y		7.5	850	300	754	253	
255	/	35	ZR	20	97W	XL	9.0	730	340	686	260	
255	/	40	ZR	20	101Y	XL	9.0	825	340	712	260	
255	/	45	ZR	20	105W	XL	8.5	925	340	738	255	
255	/	50	ZR	20	109W	XL	8.0	1030	340	764	265	
255	/	55	ZR	20	110W	XL	8.0	1060	340	788	265	
265	/	45	ZR	20	108Y	XL	9.0	1000	340	746	266	
265	/	50	R	20	111W	XL	8.5	1090	340	774	277	
275	/	30	ZR	20	97Y	XL	9.5	730	340	674	278	
275	/	35	ZR	20	102Y	XL	9.5	850	340	700	278	
275	/	40	R	20	106W	XL	9.5	950	340	728	278	
275	/	45	R	20	110W	XL	9.0	1060	340	756	273	
275	/	50	ZR	20	113W	XL	8.5	1150	340	784	284	
275	/	55	R	20	117W	XL	8.5	1285	340	810	284	
275	/	60	R	20	119V	XL	8.0	1360	340	838	279	
285	/	50	ZR	20	116W	XL	9.0	1250	340	794	297	
315	/	35	ZR	20	110Y	XL	11.0	1060	340	728	320	
265	/	40	ZR	21	105W	XL	9.5	925	340	745	271	
265	/	45	ZR	21	104W		9.0	900	300	771	266	
275	/	40	ZR	21	107Y	XL	9.5	975	340	753	278	
275	/	45	ZR	21	110W	XL	9.0	1060	340	781	273	
285	/	35	ZR	21	105Y	XL	10.0	925	340	733	290	
295	/	35	ZR	21	107Y	XL	10.5	975	340	739	301	
295	/	40	ZR	21	111Y	XL	10.5	1090	340	769	301	
325	/	30	ZR	21	108W	XL	11.5	1000	340	729	331	
275	/	40	ZR	22	107Y	XL	9.5	975	340	779	278	
285	/	35	ZR	22	106W	XL	10.0	950	340	759	290	
295	/	30	ZR	22	103W	XL	10.5	875	340	737	301	



SportMax



S3000
16/17/18

S3000 is a drift tyre that pursues high-speed driving control and enjoys endless fun of driving on the street and track.

Original formula structure

It adopts the new unique filler and the special tread formula of multi-functional materials to quickly reach the hot-melt temperature, soften the hardness of the tread, generate viscosity, provide great grip when driving and braking, and prevent sideslip when turning;

New formula structure

The specific formula design is applicable to comprehensive track, dry track and wet track respectively, with tread hardness of 45-88, providing excellent grip and low hardness wear resistance under various extreme conditions;

The cross support design

The cross support design makes the rigidity of the center tire shoulder most moderate distribution, improves the grounding when turning, and ensures the drainage performance;

Super high-strength sidewall

The enhanced sidewall design can prevent the bulge or damage when the tire collides with the edge of the track. When the tire accelerates, brakes or turns at high speed, it can bear strong longitudinal tension and centrifugal force;

Hidden pattern

The tire adopts aramid, super strong steel wire and special sidewall rubber to improve tire rigidity, reduce tire roll when cornering and ensure good handling;




HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

PERFORMANCE TESTING

SUPER GRIP

For the tread rubber of previous events, appropriate carbon black increment can enhance the dry grip. Silicon element is added to ensure the grip of the wetland and enhance the adhesion with the road during driving. Get stronger grip. In addition, use polymer hybrid polymer to strengthen colloidal rigidity. To ensure wear resistance.

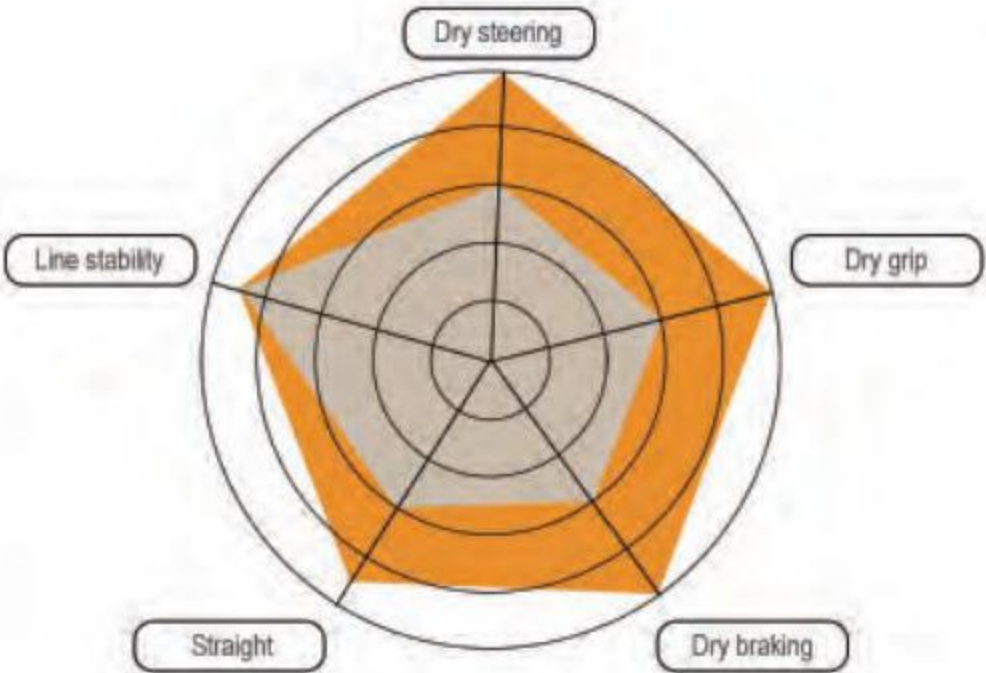

S3000 SportMax

SIZE					LI/SS	XL	STANDARD	MAX	MAX	OUTER	SECTION	REMARKS
							RI	LOAD	PRESS	DIAMETER	WIDTH	
							inch	kg	kPa	mm	mm	
235	/	40	R	18	95W	XL	8.5	690	340	645	241	
265	/	35	R	18	97W	XL	9.5	730	340	643	271	
255	/	35	ZR	18	94Y	XL	9.0	670	340	635	260	
225	/	40	ZR	18	92W	XL	8.0	630	340	637	230	
225	/	45	ZR	18	95W	XL	7.5	690	340	659	225	
215	/	45	ZR	17	91W	XL	7.0	615	340	626	213	
235	/	45	ZR	17	97W	XL	8.0	730	340	644	236	
205	/	55	ZR	16	94W	XL	6.5	670	340	632	214	



DurableMax



RS01
13/14/15/16

RS01 is designed for taxis. Adopt three grooves and large blocks design, especially the use of ultra-fine carbon black, which greatly improves the abrasion resistance and safety of the tire, reduces the rolling resistance of the tire, and improves operation for taxi drivers while ensuring safety income.



Two continuous central rib patterns provide superior abrasion resistance.



Special contour design to prevent tire wear.



The convex surface is designed to bulge outwards to provide superior traction and anti-skid performance for the tire.




Continuous shoulder block design provides superior driving stability and handling performance for cars under high load conditions.



HABILEAD TIRE • PURSUE PERFECTION • ENJOY DRIVING

PERFORMANCE TESTING

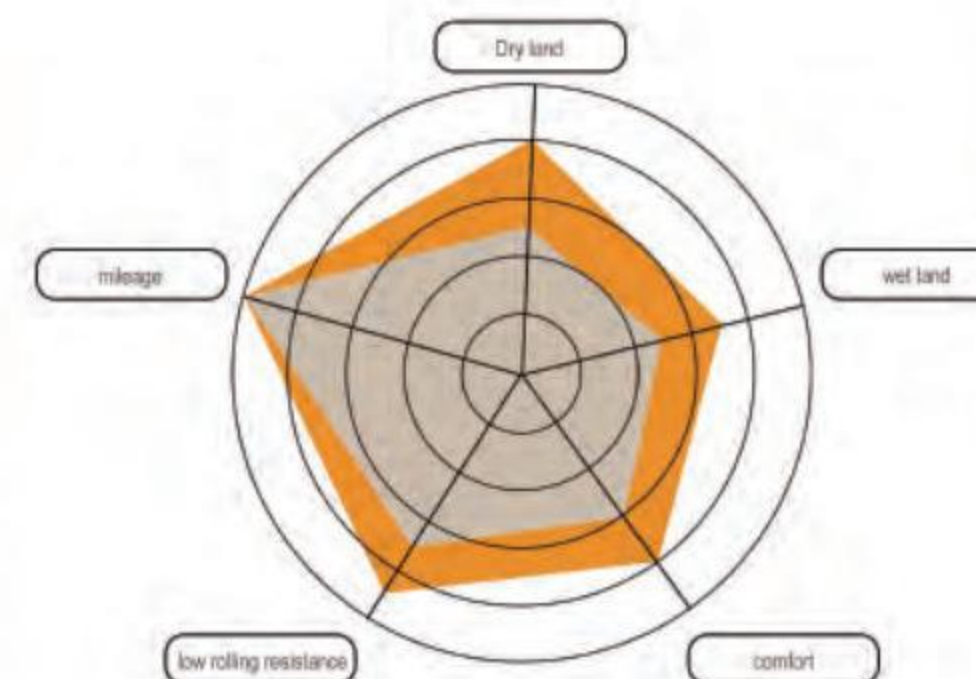

SUPER WEAR-RESISTANT AND STABLE DRIVING

ABRASION AND DURABILITY

[Uniform ground pressure design] Suppress shoulder deformation and shoulder wear

LONG SERVICE LIFE

Optimize the tread rubber formula to strengthen the tread strength and prevent the tread deformation in the later stage of use.

RS01 DurableMax

SIZE						LI/SS	XL	STANDARD RM	MAX LOAD	MAX PRESS	OUTER DIAMETER	SECTION WIDTH	REMARKS
								inch	kg	kPa	mm	mm	
165			R	13	LT	94/93R		4.5	670/650	450	594	165	
165	/	70	R	13	C	88/86R		5.0	560/530	375	562	170	
165	/	70	R	13	LT	88/86R		5.0	560/530	375	562	170	
175	/	70	R	14	LT	95/93R		5.0	690/650	375	602	177	
175	/	65	R	14	C	90/88T		5.0	600/560	375	584	177	
175	/	65	R	14	LT	90/88T		5.0	600/560	375	584	177	
185			R	14	C	102/100R		5.5	850/800	450	650	188	
185			R	14	LT	102/100R		5.5	850/800	450	650	188	
195			R	14	LT	105/103R		5.5	925/875	450	666	198	
195			R	15	C	106/104R		5.5	950/900	450	693	196	
195			R	15	LT	106/104R		5.5	950/900	450	693	196	
195	/	70	R	15	LT	99/96R		6.0	775/710	450	655	201	
205	/	65	R	15	LT	102/100T		6.0	800/730	450	647	209	
205	/	70	R	15	LT	106/104R		6.0	950/900	450	669	209	
215	/	65	R	15	LT	104/102T		6.5	900/850	375	661	221	
215	/	70	R	15	LT	104/101R		6.5	900/825	450	683	221	
225	/	70	R	15	LT	106/103R		6.5	950/875	450	697	228	
185	/	75	R	16	LT	100/97R		5.0	800/730	450	684	184	
195	/	65	R	16	LT	99/96R		6.0	775/710	450	660	201	
195	/	75	R	16	LT	102/99R		5.5	850/775	450	698	196	
205	/	65	R	16	LT	101/98R		6.0	825/750	450	672	209	
205	/	75	R	16	LT	113/111R		5.5	1150/1090	525	714	203	
215	/	65	R	16	LT	109/107R		6.5	1030/975	475	686	221	
215	/	75	R	16	LT	112/109R		6.0	1120/1030	525	728	216	
225	/	65	R	16	LT	112/110R		6.5	1120/1060	475	698	228	
235	/	65	R	16	LT	115/113R		7.0	1215/1150	475	712	240	
195			R	14	LT	105/103R		5.5	925/875	450	666	198	




PracticalMax



RS01
13/14/15/16

RS01 is a light truck tire for business use, which can meet the overweight test under various extremely harsh conditions. It is specially designed to improve the business operation income

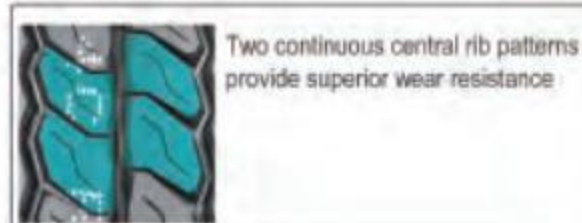


Two continuous central rib patterns provide superior wear resistance



Special contour design to prevent tire eccentric wear



The design of convex surface protruding out of tread pattern block provides superior traction performance and anti-sideslip performance for the tire

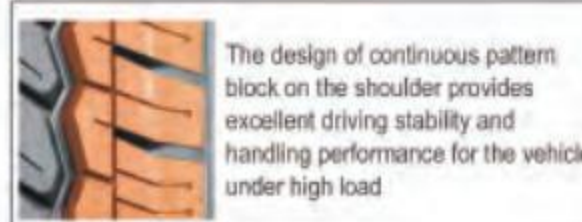


The design of continuous pattern block on the shoulder provides excellent driving stability and handling performance for the vehicle under high load



HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

PERFORMANCE TESTING

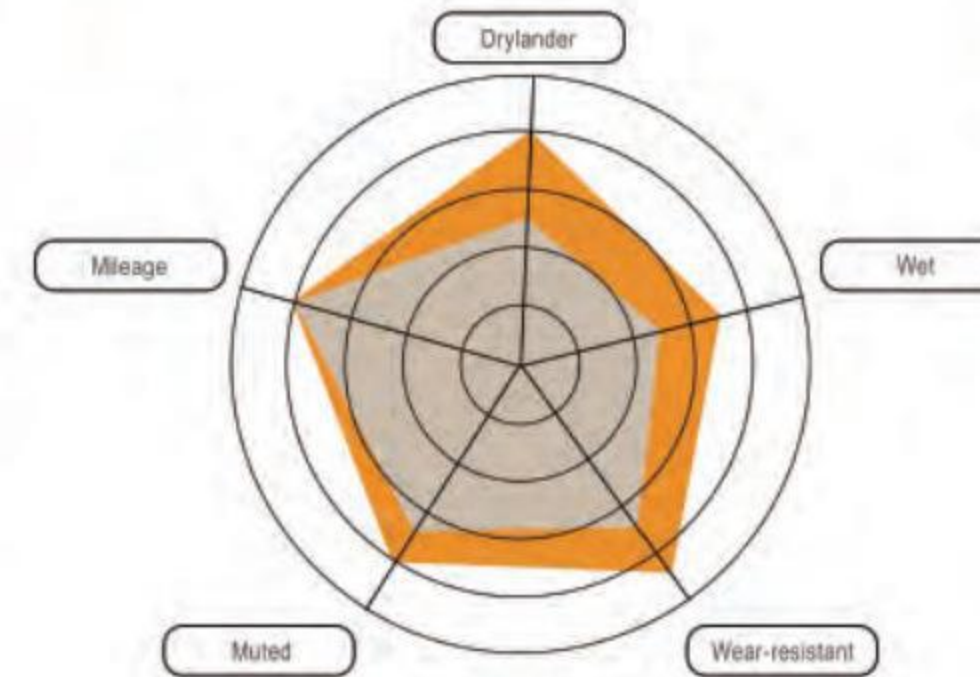

RS01 PracticalMax


SIZE						L/SS	XL	STANDARD RIM	MAX LOAD	MAX PRESS	OUTER DIAMETER	SECTION WIDTH	REMARKS
								inch	kg	kPa	mm	mm	
165			R	13	LT	94/93R		4.5	670/650	450	594	165	
165	/	70	R	13	C	88/86R		5.0	560/530	375	562	170	
165	/	70	R	13	LT	88/86R		5.0	560/530	375	562	170	
175	/	70	R	14	LT	95/93R		5.0	690/650	375	602	177	
175	/	65	R	14	C	90/88T		5.0	600/560	375	584	177	
175	/	65	R	14	LT	90/88T		5.0	600/560	375	584	177	
185			R	14	C	102/100R		5.5	850/800	450	650	188	
185			R	14	LT	102/100R		5.5	850/800	450	650	188	
195			R	14	LT	105/103R		5.5	925/875	450	666	198	
195			R	15	C	106/104R		5.5	950/900	450	693	196	
195			R	15	LT	106/104R		5.5	950/900	450	693	196	
195	/	70	R	15	LT	99/96R		6.0	775/710	450	655	201	
205	/	65	R	15	LT	102/100T		6.0	800/730	450	647	209	
205	/	70	R	15	LT	106/104R		6.0	950/900	450	669	209	
215	/	65	R	15	LT	104/102T		6.5	900/850	375	661	221	
215	/	70	R	15	LT	104/101R		6.5	900/825	450	683	221	
225	/	70	R	15	LT	106/103R		6.5	950/875	450	697	228	
185	/	75	R	16	LT	100/97R		5.0	800/730	450	684	184	
195	/	65	R	16	LT	99/96R		6.0	775/710	450	660	201	
195	/	75	R	16	LT	102/99R		5.5	850/775	450	698	196	
205	/	65	R	16	LT	101/98R		6.0	825/750	450	672	209	
205	/	75	R	16	LT	113/111R		5.5	1150/1090	525	714	203	
215	/	65	R	16	LT	109/107R		6.5	1030/975	475	686	221	
215	/	75	R	16	LT	112/109R		6.0	1120/1030	525	728	216	
225	/	65	R	16	LT	112/110R		6.5	1120/1060	475	698	228	
235	/	65	R	16	LT	115/113R		7.0	1215/1150	475	712	240	
195			R	14	LT	105/103R		5.5	925/875	450	666	198	




Specialty Trailer

RS03 13/14/15/16

RS03 is designed especially for specialty trailer. The Z shape tread blocks provide excellent traction.

- 

4 draining grooves bring excellent drainage.
- 

Soft central blocks and hard Z shape blocks can meet all terrains.
- 

Wider tread brings extra grips and traction.
- 

Thick sidewall and special wearing compound bring long mileage.



HABLEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

RS03 Specialty Trailer

Size						LI&SS	P.R	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
								inch	kg	kPa	mm	mm	
ST	175	/	80	R	13	91/87M	6C	5	615/545	350	610	177	
ST	205	/	75	R	14	100/96M	6C	5.5	800/710	350	664	203	
ST	215	/	75	R	14	102/98M	6C	6	850/750	350	678	216	
ST	205	/	75	R	15	101/97M	6C	5.5	825/730	350	689	203	
ST	205	/	75	R	15	107/102M	8D	5.5	975/850	450	689	203	
ST	225	/	75	R	15	113/108M	8D	6	1150/1000	450	719	223	
ST	225	/	75	R	15	117/112M	10E	6	1285/1120	550	719	223	
ST	235	/	80	R	16	124/120M	10E	6.5	1600/1410	590	782	235	
ST	235	/	85	R	16	125/121M	10E	6.5	1650/1450	550	806	235	
ST	235	/	85	R	16	128/124M	12F	6.5	1800/1600	660	806	235	






PracticalMax H/T



RS27
15/16/17/18

RS27 is a kind of SUV and pick-up truck tire with mixed pattern designed for unique climate and environment, which can adapt to all kinds of comprehensive road conditions

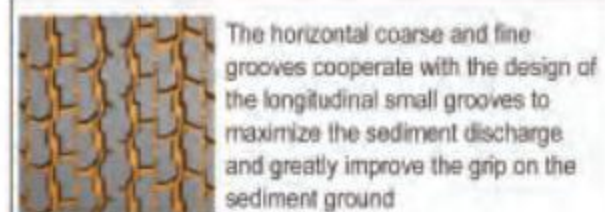


The horizontal coarse and fine grooves cooperate with the design of the longitudinal small grooves to maximize the sediment discharge and greatly improve the grip on the sediment ground



Four main zigzag grooves and transverse grooves provide excellent wet grip performance



The design of large three-dimensional decorative steps at the shoulder of the tire provides great heat dissipation capacity, and the tire can cope with the hot and dry climate




The high toughness and tear resistance formula is designed to ensure the performance of tyres in severe environment
Performance Testing




HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

PERFORMANCE TESTING

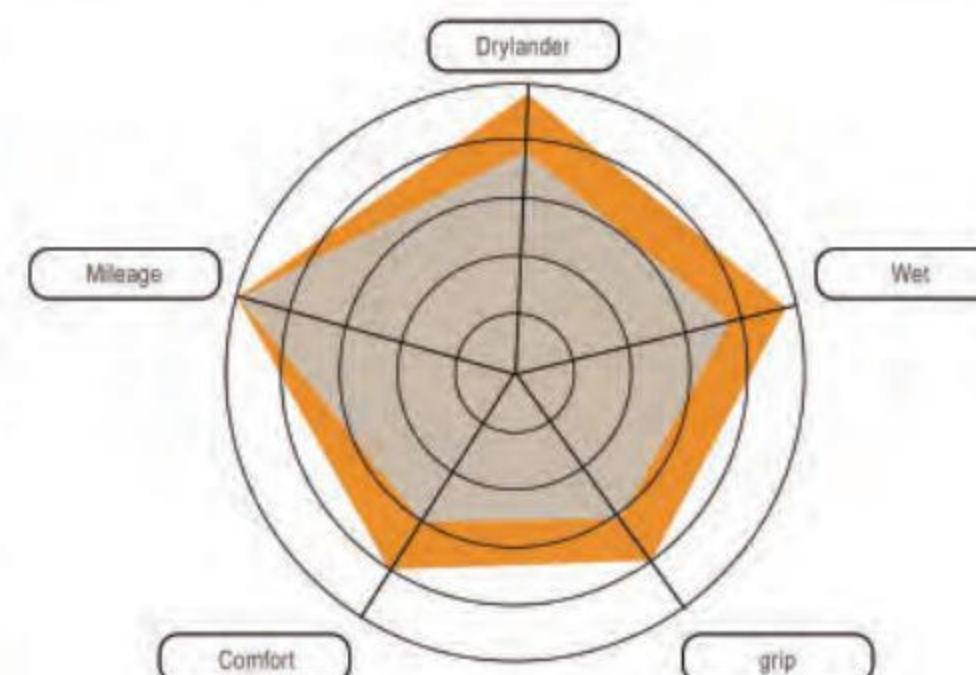

THE DESIGN OF BASE GLUE THICKNESS STRENGTHENING

The thickness of the base rubber is strengthened to prevent the tread groove from cracking

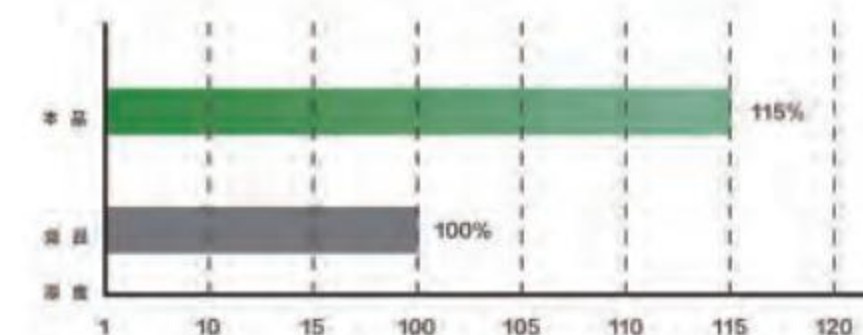

RS27 PracticalMax H/T

SIZE						LI/SS	XL	STANDARD RIM	MAX LOAD	MAX PRESS	OUTER DIAMETER	SECTION WIDTH	REMARKS
								inch	kg	kPa	mm	mm	
255	/	70	R	15	C	112/110S		7.5	1120/1060	375	739	260	
205			R	16	C	110/108S		6.0	1110/1000	450	736	208	
235	/	85	R	16		120/116S		6.5	1400/1250	550	806	235	
265	/	65	R	17		112H		8.0	1120	300	776	272	
285	/	65	R	17		116H		8.5	1250	300	802	292	
285	/	60	R	18		116H		8.5	1250	300	799	292	



TouringMax+ A/S



H201 15/16

H201 is a high-end touring tire with four seasons pattern. Its super long wearing performance has excellent dry and wet performance. With low heat formula, it can bring safety guarantee for long-distance travel. At the same time, the optimized tire section design greatly improves the driving comfort

Special contour design and formula design are adopted to ensure super long mileage

Seamless steel wire ring and crown strip ensure the uniformity of tire and improve the comfort


Multi slotted design to improve grip and reduce noise

Four broad grooves provide good drainage performance




HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

PERFORMANCE TESTING

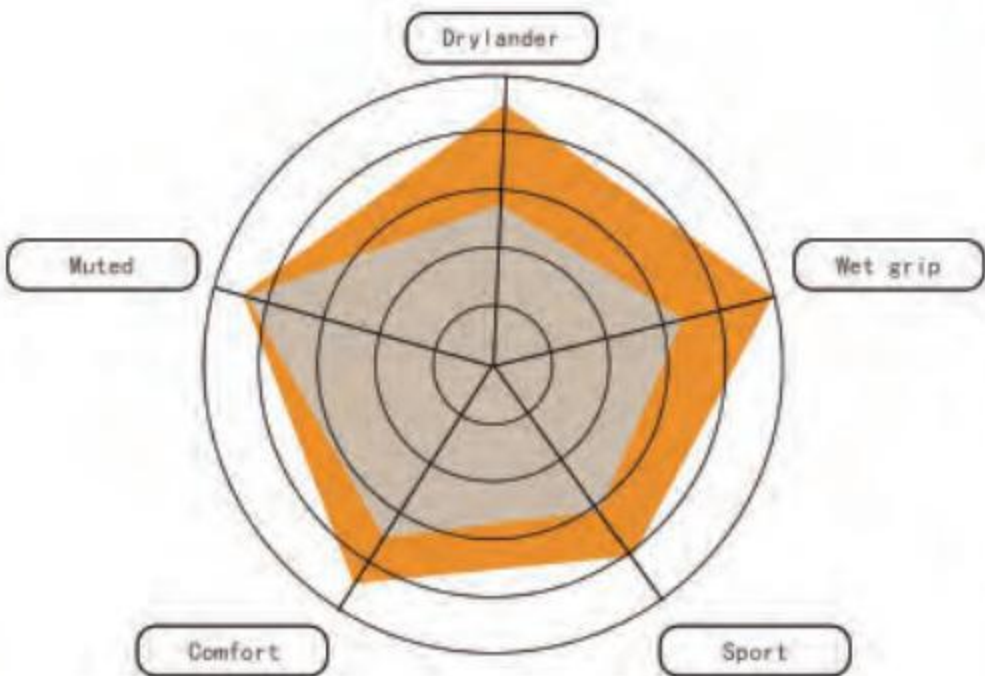

The latest formula of solution polymerized styrene and silicon technology makes the grounding area closer; effectively improves wetland performance, reduces rolling resistance and provides excellent handling performance

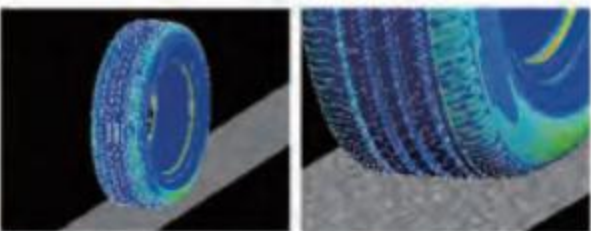

Validation of bionic technology of road noise analysis of road noise caused by tire driving on rough road, adjustment of tire structure, reduction of road noise

H201 TouringMax+ A/S

SIZE					LI/SS	XL	STANDARD RIM	MAX LOAD	MAX PRESS	OUTER DIAMETER	SECTION WIDTH	REMARKS
							inch	kg	kPa	mm	mm	
205	/	70	R	15	96T		6.0	710	300	669	209	
205	/	75	R	15	97T		5.5	730	300	689	203	
215	/	70	R	15	98T		6.5	750	300	683	221	
215	/	75	R	15	100T		6.0	800	300	703	216	
225	/	70	R	15	100T		6.5	800	300	697	228	
225	/	75	R	15	102T		6.0	850	300	719	223	
235	/	75	R	15	105T		6.5	925	300	733	235	
205	/	55	R	16	91T		6.5	615	300	632	214	




Summer HP



A4
13/14/15/16/17

A4 pecial all Season product with marvelous overall performance.




Special asymmetrical design provides excellent grip and handling in both dry wet conditions.



The updated SSBP and silica compound provide excellent wet grip, much reduced rolling resistance, and terrific handling in high speed.



Sipes on outside shoulder enhance turning handling and low down noise in high speed.



The dramatic 2 central big grooves with special compound, enhances efficient water evacuation to deal with all conditions



HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

A4 Summer HP

Size					LI&SS		Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
225	/	45	R	17	94V	XL	7.5	670	340	634	225	
185	/	55	R	15	82H		6.0	530	300	585	194	
185	/	55	R	15	86H	XL	6.0	530	340	585	194	
195	/	55	R	15	85H		6.0	515	300	595	201	
195	/	55	R	16	87H		6.0	545	300	620	201	
205	/	55	R	16	91V		6.5	670	300	632	214	
205	/	55	R	16	94V	XL	6.5	670	340	632	214	
215	/	55	R	16	97V	XL	7.0	730	340	642	226	
185	/	60	R	14	82H		5.5	475	300	578	189	
185	/	60	R	15	88H	XL	5.5	560	340	603	189	
195	/	60	R	15	88H		6.0	560	300	615	201	
205	/	60	R	16	96H	XL	6.0	710	340	652	209	
155	/	65	R	14	75T		4.5	387	300	558	157	
165	/	65	R	14	79T		5.0	437	300	570	170	
175	/	65	R	14	82T		5.0	530	300	584	177	
175	/	65	R	14	86T	XL	5.0	530	340	584	177	
185	/	65	R	14	86T		5.5	530	300	596	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	65	R	15	91H		6.0	690	300	635	201	
195	/	65	R	15	95H	XL	6.0	690	340	635	201	
165	/	70	R	13	79T		5.0	437	300	562	170	
165	/	70	R	14	81T		5.0	515	300	588	170	
165	/	70	R	14	85T	XL	5.0	515	340	588	170	
175	/	70	R	13	82T		5.0	475	300	576	177	
175	/	70	R	14	88T	XL	5.0	560	340	602	177	




ComfortMax



H206 14/15


H206 is designed with noise reduction block + multi-pitch arrangement pattern, which reduces driving noise and improves comfort. It is a passenger car tire for private car owners with safety and comfort at the core.

-  Balanced comprehensive performance: silent, safe, comfortable and fuel efficient;
-  Optimized cross-section profile improves handling stability during driving;
-  Silencer block design, disturbs the high-speed air flow in the groove, reduces the noise caused by the pumping effect, and is more quiet and comfortable;
-  Variable pitch pattern design, combined with optimized pitch arrangement, can effectively reduce noise during driving and improve driving quality;
-  Lightweight tire design, the application of new materials such as ultra-high-strength steel wire and single wound bead wire, lightweight tire products, improving comfort and reducing roll resistance;



HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

PERFORMANCE TESTING

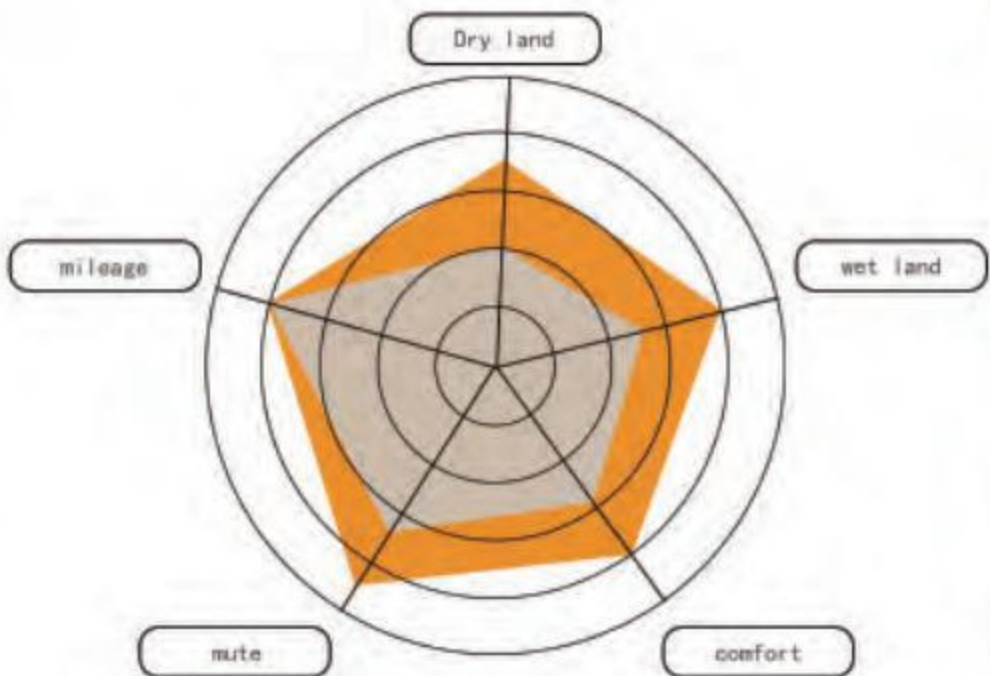

The design of variable pattern pitch and quick noise elimination in the groove can effectively cut off the air flow and reduce noise; the use of silicon-containing formula makes the vehicle have excellent fuel-saving ability.

H206 ComfortMax

SIZE					LI/SS	XL	STANDARD RIM	MAX LOAD	MAX PRESS	OUTER DIAMETER	SECTION WIDTH	REMARKS
							inch	kg	kPa	mm	mm	
175	/	70	R	14	84H		5.0	500	300	602	177	
185	/	60	R	14	82H		5.5	475	300	578	189	
185	/	65	R	14	86H		5.5	530	300	596	189	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	60	R	15	88V		6.0	560	300	615	201	
195	/	65	R	15	91V		6.0	615	300	635	201	
205	/	65	R	15	94V		6.0	670	300	647	209	



SnowShoes



Winter tire icy and snowy power Handling Grip performance

AW33

13/14/15/16/17/18/19/20

AW33 is a winter tire product specially designed for the ice and snow area, so that you can enjoy the driving pleasure on the ice and snow ground and the slippery road



Unsymmetrical tread tires maintain rigidity on the outside and provide more ground area, improve the grip of dry wetland and ice surface sharp turning



The 3D and ultra-thin groove design with fine tread improves the grip of ice and snow ground and ensures the handling and driving performance of ice and snow ground



More crosswise and multiple pattern grooves cross, which can fully absorb water, avoid water film, and effectively form snow pillars to improve snow discharge performance



The low temperature resistant compound formula of tread has strong grip on snow and ice, and can ensure excellent handling performance



HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

AW33 SnowShoes

Size					L&SS	/XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
155	/	65	R	13	71T		4.5	365	300	532	157	
165	/	70	R	13	79T		5.0	437	300	562	170	
165	/	60	R	14	75T		5.0	387	300	554	170	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	86T	XL	5.0	530	340	584	177	
175	/	70	R	14	88T	XL	5.0	560	340	602	177	
185	/	60	R	14	82T		5.5	475	300	578	189	
185	/	65	R	14	86T		5.5	530	300	596	189	
185	/	70	R	14	88T		5.5	560	300	616	189	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	55	R	15	85H		6.0	515	300	595	201	
195	/	60	R	15	88H		6.0	560	300	615	201	
195	/	65	R	15	95T	XL	6.0	690	300	635	201	
205	/	65	R	15	94H		6.0	670	300	647	209	
195	/	60	R	16	89T		6.0	580	300	640	201	
205	/	55	R	16	91H		6.5	615	300	632	214	
205	/	60	R	16	96H	XL	6.0	710	340	652	209	
225	/	55	R	16	99H	XL	7.0	775	340	654	233	
215	/	60	R	16	99H	XL	6.5	775	340	664	221	
215	/	65	R	16	98H		6.5	750	300	686	221	
215	/	70	R	16	100T		6.5	800	300	708	221	
225	/	60	R	16	98T		6.5	750	300	676	228	
225	/	70	R	16	107T	XL	6.5	975	340	722	228	
235	/	60	R	16	100T		7.0	800	300	688	240	
235	/	70	R	16	106T		7.0	950	300	736	240	
245	/	70	R	16	107T		7.0	975	300	750	248	
265	/	70	R	16	112T		8.0	1120	300	778	272	
205	/	45	R	17	88H	XL	7.0	560	340	616	206	
205	/	50	R	17	93H	XL	6.5	650	340	638	214	
215	/	50	R	17	95H	XL	7.0	690	340	648	226	
215	/	55	R	17	94H		7.0	670	300	668	226	
215	/	60	R	17	96H		6.5	710	300	690	221	
225	/	45	R	17	94H	XL	7.5	670	340	634	225	
225	/	50	R	17	98H	XL	7.0	750	340	658	233	
225	/	55	R	17	101H	XL	7.0	825	340	680	233	
225	/	60	R	17	99H		6.5	775	300	702	228	
225	/	65	R	17	102T		6.5	850	300	724	228	
235	/	50	R	17	100H	XL	7.5	800	340	668	245	
235	/	55	R	17	103H	XL	7.5	875	340	690	245	
235	/	65	R	17	108T	XL	7.0	1000	340	738	240	
245	/	65	R	17	111H	XL	7.0	1090	340	750	248	
265	/	65	R	17	112T		8.0	1120	300	776	272	
265	/	65	R	17	116H	XL	8.0	1250	340	776	272	
215	/	35	R	18	95H		7.0	690	300	693	226	
225	/	40	R	18	92H	XL	8.0	630	340	637	230	
225	/	50	R	18	99H	XL	7.0	775	340	683	233	
225	/	55	R	18	98H		7.0	750	300	705	233	
225	/	60	R	18	104H	XL	6.5	900	340	727	228	
235	/	50	R	18	101H	XL	7.5	825	340	693	245	
235	/	55	R	18	100H		7.5	800	300	715	245	
235	/	60	R	18	107T	XL	7.0	975	340	739	240	
245	/	40	R	18	97H	XL	8.5	730	340	653	248	
245	/	45	R	18	100H	XL	8.0	800	340	677	243	
255	/	55	R	18	105H		8.0	925	300	737	265	
265	/	60	R	18	114T	XL	8.0	1180	340	775	272	
285	/	60	R	18	120H	XL	8.5	1400	340	799	292	
225	/	45	R	19	96H	XL	7.5	710	340	685	225	
225	/	55	R	19	99H		7.0	775	300	731	233	
235	/	45	R	19	99H	XL	8.0	775	340	695	236	
235	/	50	R	19	103H	XL	7.5	875	340	719	245	
235	/	55	R	19	105H	XL	7.5	925	340	741	245	
245	/	45	R	19	102H	XL	8.0	850	340	703	243	
245	/	50	R	19	105H	XL	7.5	925	340	729	253	
245	/	55	R	19	103H		7.5	875	300	753	253	
255	/	45	R	19	104H	XL	8.5	900	340	713	255	
255	/	50	R	19	107H	XL	8.0	975	340	739	265	
255	/	55	R	19	111H	XL	8.0	1090	340	763	265	
265	/	50	R	19	110H	XL	8.5	1060	340	749	277	
245	/	40	R	20	99H	XL	8.5	775	340	704	248	
245	/	45	R	20	103H	XL	8.0	875	340	728	243	
255	/	50	R	20	109H	XL	8.0	1030	340	764	265	
265	/	50	R	20	111H	XL	8.5	1090	340	774	277	
275	/	40	R	20	106H	XL	9.5	950	340	728	278	
275	/	45	R	20	110H	XL	9.0	1060	340	756	273	
315	/	35	R	20	110H	XL	11.0	1060	340	728	320	
205	/	55	RF	16	91H		6.5	615	300	632	214	
205	/	45	RF	17	88H	XL	7.0	560	340	616	206	
205	/	50	RF	17	93H	XL	6.5	650	340	638	214	
225	/	45	RF	17	94H	XL	7.5	670	340	634	225	
225	/	50	RF	17	98H	XL	7.0	750	340	658	233	
225	/	55	RF	17	101H	XL	7.0	825	340	680	233	
225	/	40	RF	18	92H	XL	8.0	630	340	637	230	
225	/	50	RF	18	99H	XL	7.0	775	340	683	233	
235	/	50	RF	18	101H	XL	7.5	825	340	693	245	
245	/	40	RF	18	97H	XL	8.5	730	340	653	248	
245	/	45	RF	18	100H	XL	8.0	800	340	677	243	
255	/	55	RF	18	105H		8.0	925	300	737	265	
235	/	45	RF	19	99H	XL	8.0	775	340	695	236	
235	/	50	RF	19	103H	XL	7.5	875	340	719	245	
235	/	55	RF	19	105H	XL	7.5	925	340	741	245	
245	/	45	RF	19	102H	XL	8.0	850	340	703	243	
245	/	50	RF	19	105H	XL	7.5	925	340	729	253	
255	/	50	RF	19	107H	XL	8.0	975	340	739	265	
275	/	40	RF	20	106H	XL	9.5	950	340	728	278	
315	/	35	RF	20	110H	XL	11.0	1060	340	728	320	




SnowShoes



Winter tire icy road safety power Handling Driving-reference

AW11
15

AW11 is a light-truck product specially designed for winter driving road, which ensures the safety of driving on ice and snow road



The tread adopts two kinds of 3D ultra-thin groove densification design with reasonable angle to improve the grip of ice and snow ground and ensure the handling and driving performance of ice and snow road



The low temperature resistant compound formula of the tread can keep the soft characteristics of the tire in cold weather, effectively improve the grip of ice and snow road, and ensure excellent handling performance



The wide pattern block design of the tread chamfering angle can effectively prevent the tire from sideslip on the ice and snow road; the pattern block widening design of the shoulder of the tire and staggered fan-shaped arrangement can make the tire have more effective traction and braking ability in normal driving and turning




Deep strong pattern block and shoulder design provide excellent wear resistance and load capacity



HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

PERFORMANCE TESTING

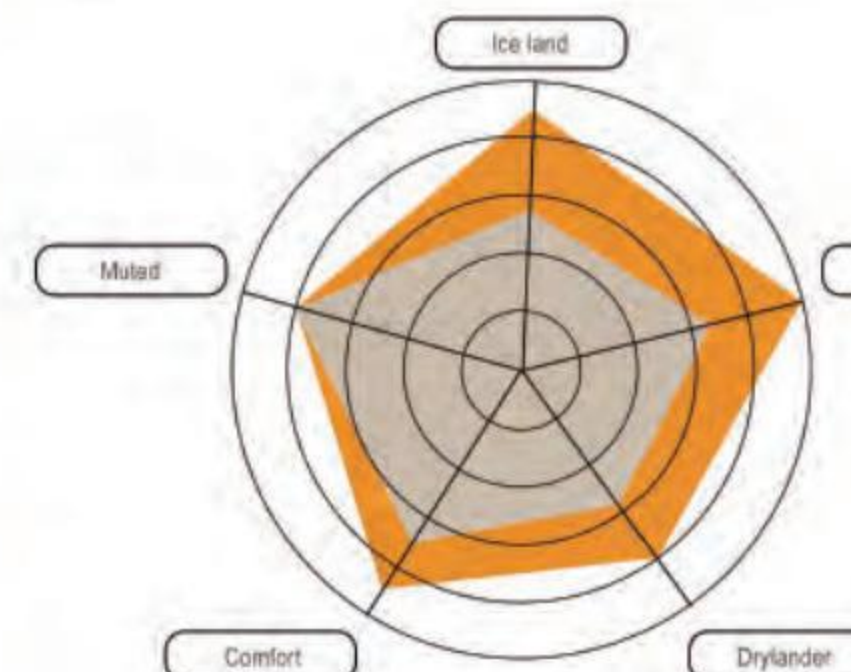

The picture shows the micrograph under the electron microscope

Tread foaming technology: a sponge like structure with appropriate density and uniform size is formed in the tread area to absorb ice moisture



3D groove Normal groove

3D groove design: the meshing effect between grooves is formed during driving, which reduces the relative movement between pattern blocks and increases the grounding area

Design of widened driving surface:

the driving surface is 5-20mm wider than that of summer tyres, enhancing driving force and braking force

Low hardness tread formula:

normal temperature: 45-50ha, -30 ℃: about 50ha, keep the tread soft and ensure the grip

AW11 SnowShoes

Size							PR	LI&SS	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
								inch	kg	kPa	mm	mm		
	175			R	14	C	8D	99/98T	5.0	775/730	450	634	178	
	175			R	14	LT	8D	99/98T	5.0	775/730	450	634	178	
	185			R	14	LT	8D	102/100S	5.5	850/800	450	650	188	
	185			R	14	C	8D	102/100S	5.5	850/800	450	650	188	
	195	/	70	R	15	LT	8D	99/96Q	6	775/710	450	655	201	
	195	/	70	R	15	C	8D	104/102R	6.0	900/850	450	655	201	
	205	/	70	R	15	C	8D	106/104S	6.0	950/900	450	669	209	
	205	/	70	R	15	LT	8D	106/104S	6.0	950/900	450	669	209	
LT	215	/	70	R	15		6C	98/95T	6.5	750/690	350	683	221	
LT	215	/	75	R	15		6C	100/97T	6.0	800/730	350	703	216	
LT	235	/	75	R	15		6C	104/101T	6.5	900/825	350	733	235	



IceMax



Winter tire by adhesion Handling Driving performance

RW501

13/14/15/16/17/18/19/20

RW501 is a winter tire product specially designed for the ice and snow area, so that you can enjoy the driving pleasure on the ice and snow ground and the slippery road




Four longitudinal grooves and continuous transverse grooves from the middle to the shoulder provide excellent snow discharge performance



Optimized tread design of shoulder and small absorption holes greatly improve the grip of ice and wet road



The 3D three-dimensional groove design with fine tread improves the grip and traction of the ice and snow ground, and improves the rigidity of the pattern block to provide excellent handling and driving performance of the ice and snow ground



Low temperature resistant compound formula of tread has strong grip on snow and ice, improves braking performance and ensures safety



HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

RW501 IceMax

SIZE					L/SS	XL	STANDARD RIM	MAX LOAD	MAX PRESS	OUTER DIAMETER	SECTION WIDTH	REMARKS
							inch	kg	kPa	mm	mm	
155	/	65	R	13	73T		4.5	365	300	532	157	
165	/	70	R	13	79T		5.0	437	300	562	170	
175	/	70	R	13	82T		5.0	475	300	576	177	
165	/	60	R	14	75T		5.0	387	300	554	170	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	82T		5.0	475	300	584	177	
175	/	70	R	14	84T		5.0	500	300	602	177	
185	/	60	R	14	82T		5.5	475	300	578	189	
185	/	65	R	14	86T		5.5	530	300	596	189	
185	/	70	R	14	88T		5.5	560	300	616	189	
195	/	60	R	14	86T		6.0	530	300	590	201	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	55	R	15	85H		6.0	515	300	595	201	
195	/	60	R	15	88H		6.0	560	300	615	201	
195	/	65	R	15	95T	XL	6.0	690	340	635	201	
205	/	65	R	15	94H		6.0	670	300	647	209	
235	/	75	R	15	109T	XL	6.5	1030	340	733	235	
195	/	60	R	16	89T		6.0	580	300	640	201	
205	/	55	R	16	91H		6.5	615	300	632	214	
205	/	60	R	16	96H	XL	6.0	710	340	652	209	
225	/	55	R	16	99H	XL	7.0	775	340	654	233	
215	/	60	R	16	99H	XL	6.5	775	340	664	221	
215	/	65	R	16	98H		6.5	750	300	686	221	
215	/	70	R	16	100T		6.5	800	300	708	221	
225	/	60	R	16	98T		6.5	750	300	676	228	
225	/	70	R	16	107T	XL	6.5	975	340	722	228	
235	/	60	R	16	100T		7.0	800	300	688	240	
235	/	70	R	16	106T		7.0	950	300	736	240	
245	/	70	R	16	107T		7.0	975	300	750	248	
215	/	50	R	17	95H	XL	7.0	690	340	648	226	
215	/	55	R	17	94H		7.0	670	300	668	226	
215	/	60	R	17	96H		6.5	710	300	690	221	
225	/	50	R	17	98H	XL	7.0	750	340	658	233	
225	/	55	R	17	101H	XL	7.0	825	340	680	233	
225	/	60	R	17	99H		6.5	775	300	702	228	
225	/	65	R	17	102T		6.5	850	300	724	228	
235	/	55	R	17	103H	XL	7.5	875	340	690	245	
235	/	65	R	17	108T	XL	7.0	1000	340	738	240	
245	/	65	R	17	111H	XL	7.0	1090	340	750	248	
215	/	55	R	18	95H		7.0	690	300	693	226	
225	/	45	R	18	91H		7.5	615	300	659	225	
225	/	55	R	18	98H		7.0	750	300	705	233	
225	/	60	R	18	104H	XL	6.5	900	340	727	228	
235	/	50	R	18	101H	XL	7.5	825	340	693	245	
235	/	55	R	18	100H		7.5	800	300	715	245	
235	/	60	R	18	107T	XL	7.0	975	340	739	240	
245	/	45	R	18	100H	XL	8.0	800	340	677	243	
245	/	60	R	18	105H		7.0	925	300	751	248	
255	/	55	R	18	105H		7.0	925	300	737	265	
265	/	60	R	18	114T	XL	8.0	1180	340	775	272	
285	/	60	R	18	120H	XL	8.5	1400	340	799	292	
245	/	55	R	19	103H		7.5	875	300	753	253	
255	/	50	R	19	107H	XL	8.0	975	340	739	265	
265	/	50	R	19	110H	XL	8.5	1060	340	749	277	
255	/	50	R	20	109H	XL	8.0	1030	340	764	265	
275	/	45	R	20	110H	XL	9.0	1060	340	756	273	
165			R	13	94/93T		4.5	670/650	450	596	167	
175			R	14	99/98T		5.0	775/730	450	634	178	
185			R	14	102/100S		5.5	850/800	450	650	188	
195	/	70	R	15	99/96Q		6	775/710	450	655	201	
205	/	70	R	15	106/104S		6.0	950/900	450	669	209	
225	/	70	R	15	106/103S		6.5	950/875	450	697	228	
215	/	70	R	15	98/95T		6.5	750/690	350	683	221	
215	/	75	R	15	100/97T		6.0	800/730	350	703	216	
235	/	75	R	15	104/101T		6.5	900/825	350	733	235	



Studdable



RW506
13/14/15/16/17/18

RW506 is designed especially for extremely cold weather. Studdable design can bring safe driving on ice road.



Directivity studs configuration provides excellent grips and guidance, guaranteeing traction and breaking



Directional design brings efficient drainage.



Special stud tedhnique brings both grips and comfortable driving.



Detailed sipes enlarge the ground contact area, draining water fast and improving grps.



HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING

RW506 Studdable

Size					LI&SS	/XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
175	/	70	R	13	82T		5.0	475	300	576	177	
175	/	65	R	14	86T	XL	5.0	530	340	584	177	
175	/	70	R	14	88T	XL	5.0	560	340	602	177	
185	/	65	R	14	90T	XL	5.5	600	340	596	189	
185	/	70	R	14	92T	XL	5.5	630	340	616	189	
185	/	60	R	15	88T	XL	5.5	560	340	603	189	
185	/	65	R	15	92T	XL	5.5	630	340	621	189	
195	/	60	R	15	92T	XL	6.0	630	340	615	201	
195	/	65	R	15	95T	XL	6.0	690	340	635	201	
205	/	65	R	15	99T	XL	6.0	775	340	647	209	
205	/	70	R	15	100T	XL	6.0	800	340	669	209	
205	/	55	R	16	94T	XL	6.5	670	340	632	214	
205	/	60	R	16	96T	XL	6.0	710	340	652	209	
215	/	60	R	16	99T	XL	6.5	775	340	664	221	
215	/	65	R	16	102T	XL	6.5	850	340	686	221	
225	/	60	R	16	102T	XL	6.5	850	340	676	228	
215	/	55	R	17	98H	XL	7.0	750	340	668	226	
225	/	45	R	17	94H	XL	7.5	670	340	634	225	
225	/	50	R	17	98H	XL	7.0	750	340	658	233	
225	/	55	R	17	101H	XL	7.0	825	340	680	233	
235	/	55	R	17	103T	XL	7.5	875	340	690	245	
225	/	40	R	18	92H	XL	8.0	630	340	637	230	
245	/	45	R	18	100H	XL	8.0	800	340	677	243	
215	/	70	R	16	100T		6.5	800	300	708	221	
235	/	70	R	16	106T		7.0	950	300	736	240	
245	/	70	R	16	111T	XL	7.0	1090	340	750	248	
265	/	70	R	16	112T		8.0	1120	300	778	272	
225	/	65	R	17	106T	XL	6.5	950	340	724	228	
235	/	65	R	17	108T	XL	7.0	1000	340	738	240	
245	/	65	R	17	111T	XL	7.0	1090	340	750	248	
265	/	65	R	17	112T		8.0	1120	300	776	272	
235	/	60	R	18	107T	XL	7.0	975	340	739	240	
255	/	55	R	18	109T	XL	8.0	1030	340	737	265	



Winter



RW505
16/17/18

RW505 is high performance winter tyres. The asymmetrical design and excellent grips bring safe driving in winter condition.



Continuous grooves from central to shoulder, bring excellent draining and safety.



Asymmetrical design provide excellent grips, breaking and handling.



Detailed 3D sipes prevent sliding, improve breaking and handling in high speed condition.



Improved shoulder blocks bring excellent stability.



HABILEAD TIRE · PURSUE PERFECTION · ENJOY DRIVING



【 Tread foaming technology 】 :

A sponge like structure with appropriate density and uniform size is formed in the tread area to absorb ice moisture.

【 Design of widened driving surface 】 :

The driving surface is 5-20mm wider than that of summer tyres, enhancing driving force and braking force.



3D groove Normal groove

【 3D groove design 】 :



The meshing effect between grooves is formed during driving, which reduces the relative movement between pattern blocks and increases the grounding area.

【 Low hardness tread formula 】 :

normal temperature: 45-50ha, - 30 ℃: about 50ha, keep the tread soft and ensure the grip.

RW505 Winter

Size					LI&SS	/XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
195	/	55	R	16	87H		6.0	545	300	620	201	
205	/	55	R	16	91V		6.5	615	300	632	214	
215	/	55	R	16	97V	XL	7.0	730	340	642	226	
225	/	55	R	16	99V	XL	7.0	775	340	654	233	
205	/	45	R	17	88V	XL	7.0	560	340	616	206	
205	/	50	R	17	93V	XL	6.5	650	340	638	214	
215	/	45	R	17	91V	XL	7.0	615	340	626	213	
215	/	50	R	17	95V	XL	7.0	690	340	648	226	
215	/	55	R	17	98V	XL	7.0	750	340	668	226	
225	/	45	R	17	94V	XL	7.5	670	340	634	225	
225	/	50	R	17	98V	XL	7.0	750	340	658	233	
225	/	55	R	17	101V	XL	7.0	825	340	680	233	
235	/	45	R	17	97V	XL	8.0	730	340	644	236	
225	/	40	R	18	92V	XL	8.0	530	340	637	230	
255	/	55	R	18	109V	XL	8.0	1030	340	737	265	



In ch Up

- Improving Stability

- Improving Handling

- Improving Breaking

Different sizes with same overall diameter




Size	Inch Up Size
155/80R13	165/65R14
	175/65R14
145/70R12	165/60R12
	155/60R13
	165/60R13
175/70R13	185/65R14
	185/60R14
	195/60R14
185/70R14	185/65R14
	195/65R14
	195/60R15
	205/60R14
	195/65R14
185/70R14	205/60R14
	195/65R14
	195/60R15
	205/60R15
195/70R14	195/65R15
	205/65R15
	205/60R15
	215/60R15
	185/60R14
175/65R14	195/60R14
	195/55R15
	195/50R15
	195/60R14
185/65R14	205/60R14
	205R55R15
195/65R14	215/55R15
185/65R15	195/60R15
	205/60R15
	215/55R15
	205/55R16

Size	Inch Up Size
195/65R15	205/60R15
	215/60R15
	215/55R16
205/65R15	215/60R15
	225/55R16
215/65R15	225/60R16
175/60R14	185/55R14
	195/55R14
	195/50R15
185/60R14	195/55R14
	195/50R15
	205/50R15
	215/40R16
195/60R14	215/50R16
	215/45R15
195/60R15	215/55R15
	215/50R15
	225/50R15
	205/55R16
	215/50R16
	225/45R16
	235/40R17
205/60R15	225/50R15
	215/55R16
	225/50R16
	245/45R16
	245/40R17
215/60R15	225/55R16
	235/50R16
	245/45R16
	245/47R17
	255/40R17

Size	Inch Up Size
215/60R16	245/45R17
	255/45R17
	255/40R18
225/60R16	245/50R16
185/55R15	195/50R15
	205/50R15
	205/45R16
	215/40R16
195/55R15	205/50R15
	215/50R15
	205/50R16
	215/45R16
205/55R15	215/50R15
	225/50R15
	205/50R16
	215/50R16
205/55R16	225/45R16
	215/50R16
	225/50R16
	245/45R16
	225/45R17
	235/45R17
	245/40R17

Size	Inch Up Size
215/55R16	225/50R16
	235/50R16
	245/50R16
	245/45R16
	215/50R17
	225/50R17
	235/45R17
	245/45R17
	255/40R17
	255/40R17
	235/40R18
245/40R18	
225/55R16	245/45R17
195/50R15	205/45R16
205/50R15	215/45R16
205/50R16	225/45R16
	245/45R16
215/50R16	245/45R16
	225/45R17
	235/40R17
	245/40R17
	255/40R17
225/50R16	245/45R16
	235/45R17
	255/40R17
215/50R17	235/45R17
	245/45R17
	245/40R17
	255/40R17
	235/40R18
	245/40R18

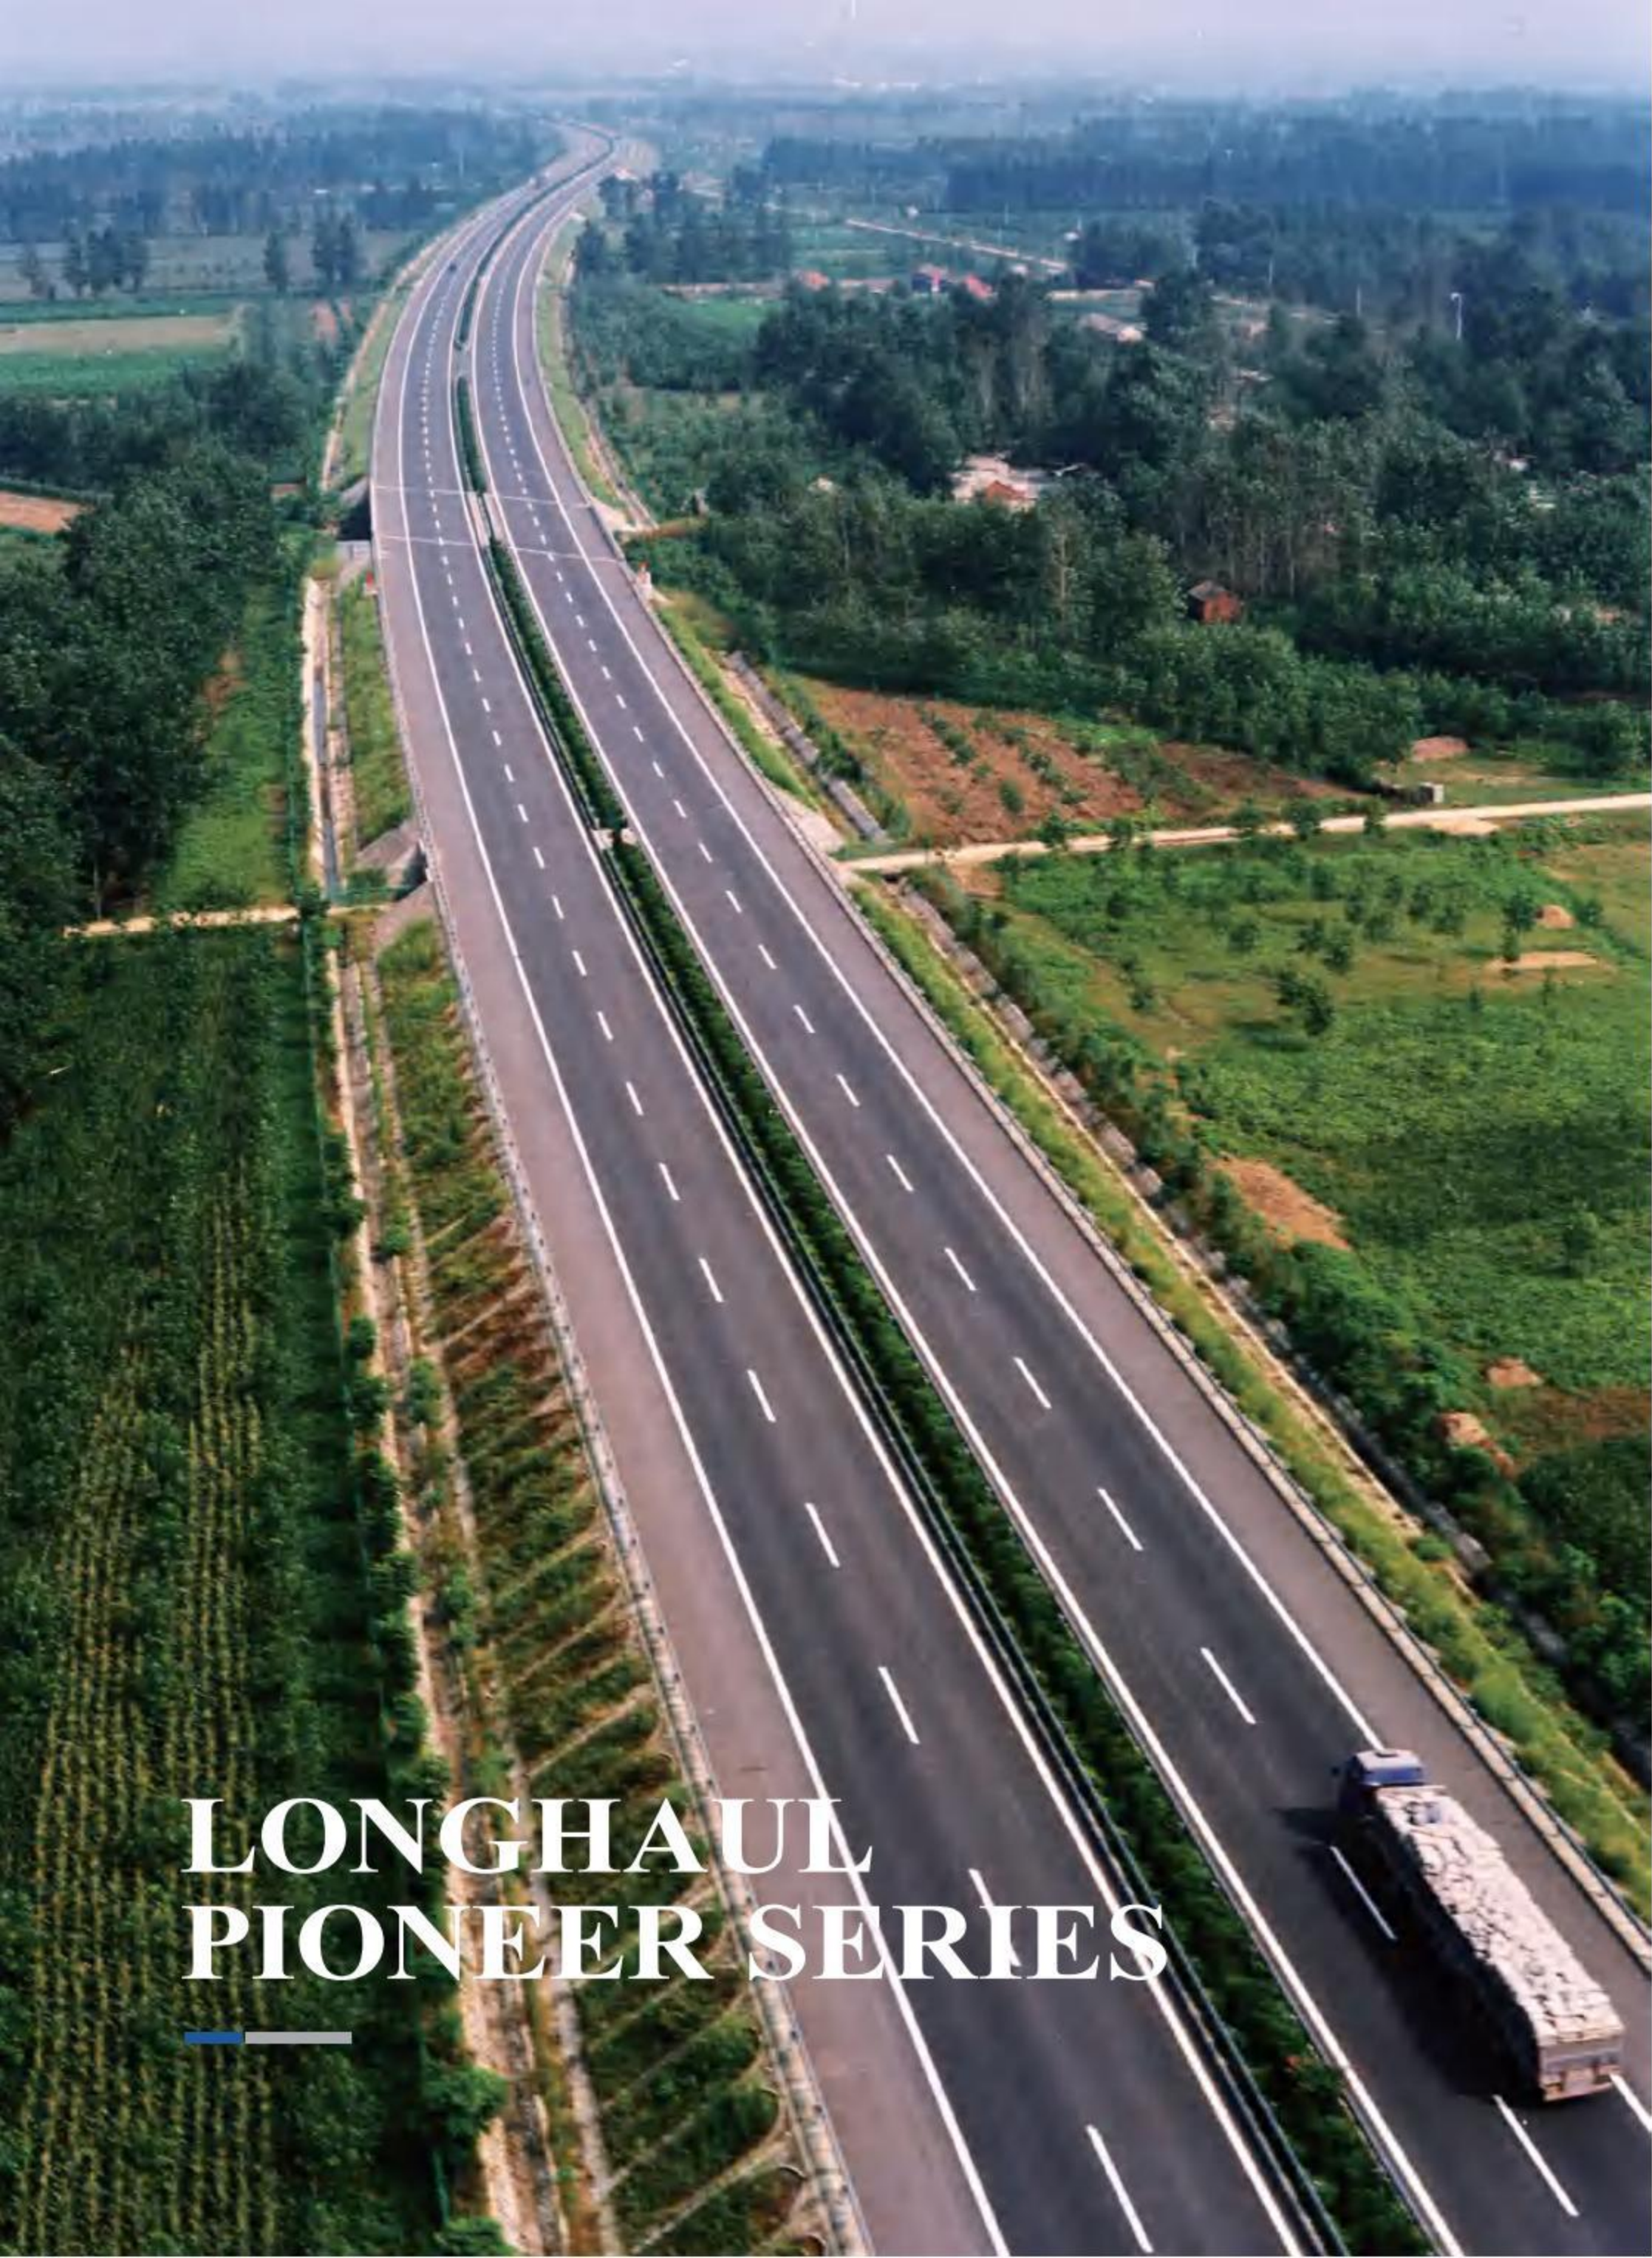

LONGHAUL PIONEER SERIES

BL511

STANDARD LOAD, ULTRA WEAR RESISTANCE, STRONG DRIVING FORCE



Low heat generation and super wear-resistant compound to ensure ultra-high mileage tire life;

The application of particle reinforcement materials and high resilience technology can reduce the heat generation of extrusion friction between polymer chains, and provide low rolling-resistant and fuel-efficient by lowering heat generation and decreasing energy loss.

Technology of uniform grounding and anti-deformation are adopted to prevent eccentric wear and decrease ineffective wear.



Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load		Max. Air Pressure				Load Index			
					Single		Double		Single			Double		
					KG	LBS	KG	LBS	KPa	PSI		KPa	PSI	
12R22.5	16	9.00	1085	300	3350	7380	3075	6780	830	120	830	120	150/147	M
	18				3550	7830	3250	7160	930	135	930	135	152/149	L

COMPANY
PROFILE

TYRE
INTRODUCTION

TYRE ORIENTATION
CHART

LONGHAUL
PIONEER SERIES

MEDIUM AND
LONG HAUL SERIES

SHORT AND MEDIUM
HAUL SERIES

MIXED AND MINING
ROAD SERIES

KNOWLEDGE
OF TYRE

BL512

STANDARD LOAD, LONG HAUL, ULTRA WEAR RESISTANCE, COMFORT




Colling case formula, low hear generation.

New Profile design helps the tread to equally share the ground pressure, prevent irregular wear and increase wear resistance performance.

Top dynamic balance performance; Tire circularity performance well.

Lower wear resistance by eco-constructing design.

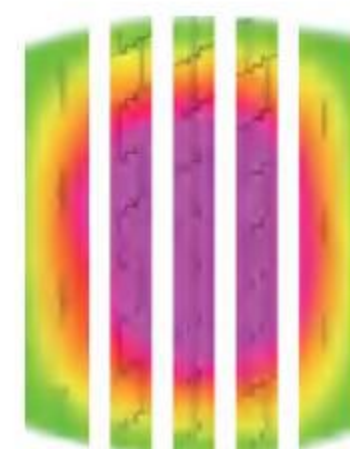

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
295/80R22.5	18	9.00	1044	298	3550	7830	3250	7160	900	130	900	130	152/149	M

BL513G

STANDARD LOAD, ULTRA WEAR RESISTANCE, STRONG DRIVING FORCE





Using super-strong skeleton material, super-strong rim structure, nylon reinforcement layer and shoulder shape optimization integration technology improve the heavy-duty capacity greatly.

Low heat generation and super wear-resistant compound to ensure ultra-high mileage tire life;

Ultra-thin kerf hybrid pitch arrangement and small incision are adopted to achieve silent and prevent eccentric wear;

The application of 4-layer Structure belt technology and the refined operation management of cushioning system can further improve the wear-resistant and provide a more comfortable ride;

Stone Ejectors & Arc Groove design of the groove's bottom for less groove damage and crack - small stones are forced out of groove.

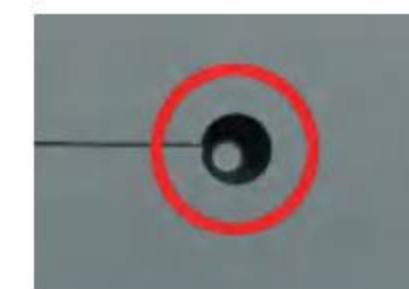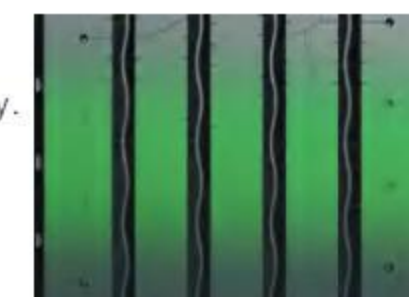


Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
295/80R22.5	18	9.00	1044	298	3550	7830	3250	7160	900	130	900	130	152/149	M
315/80R22.5	20	9.00	1076	312	4125	9090	3625	8050	860	125	860	125	157/153	L

BL513

STANDARD LOAD, ULTRA WEAR RESISTANCE, STRONG DRIVING FORCE



Low heat generation and super wear-resistant compound to ensure ultra-high mileage tire life;

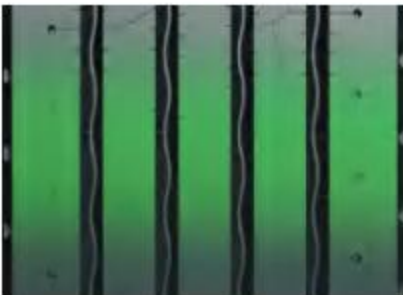

Ultra-thin kerf hybrid pitch arrangement and small incision are adopted to achieve silent and prevent eccentric wear;




The application of 4-layer Structure belt technology and the refined operation management of cushioning system can further improve the wear-resistant and provide a more comfortable ride;



Stone Ejectors & Arc Groove design of the groove's bottom for less groove damage and crack - small stones are forced out of groove.

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load		Max. Air Pressure				Load Index	Speed Rating		
					Single		Double		Single				Double	
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
295/80R22.5	18	9.00	1044	298	3550	7830	3250	7160	900	130	900	130	152/149	M
315/80R22.5	20	9.00	1076	312	4125	9090	3625	8050	860	125	860	125	157/153	L

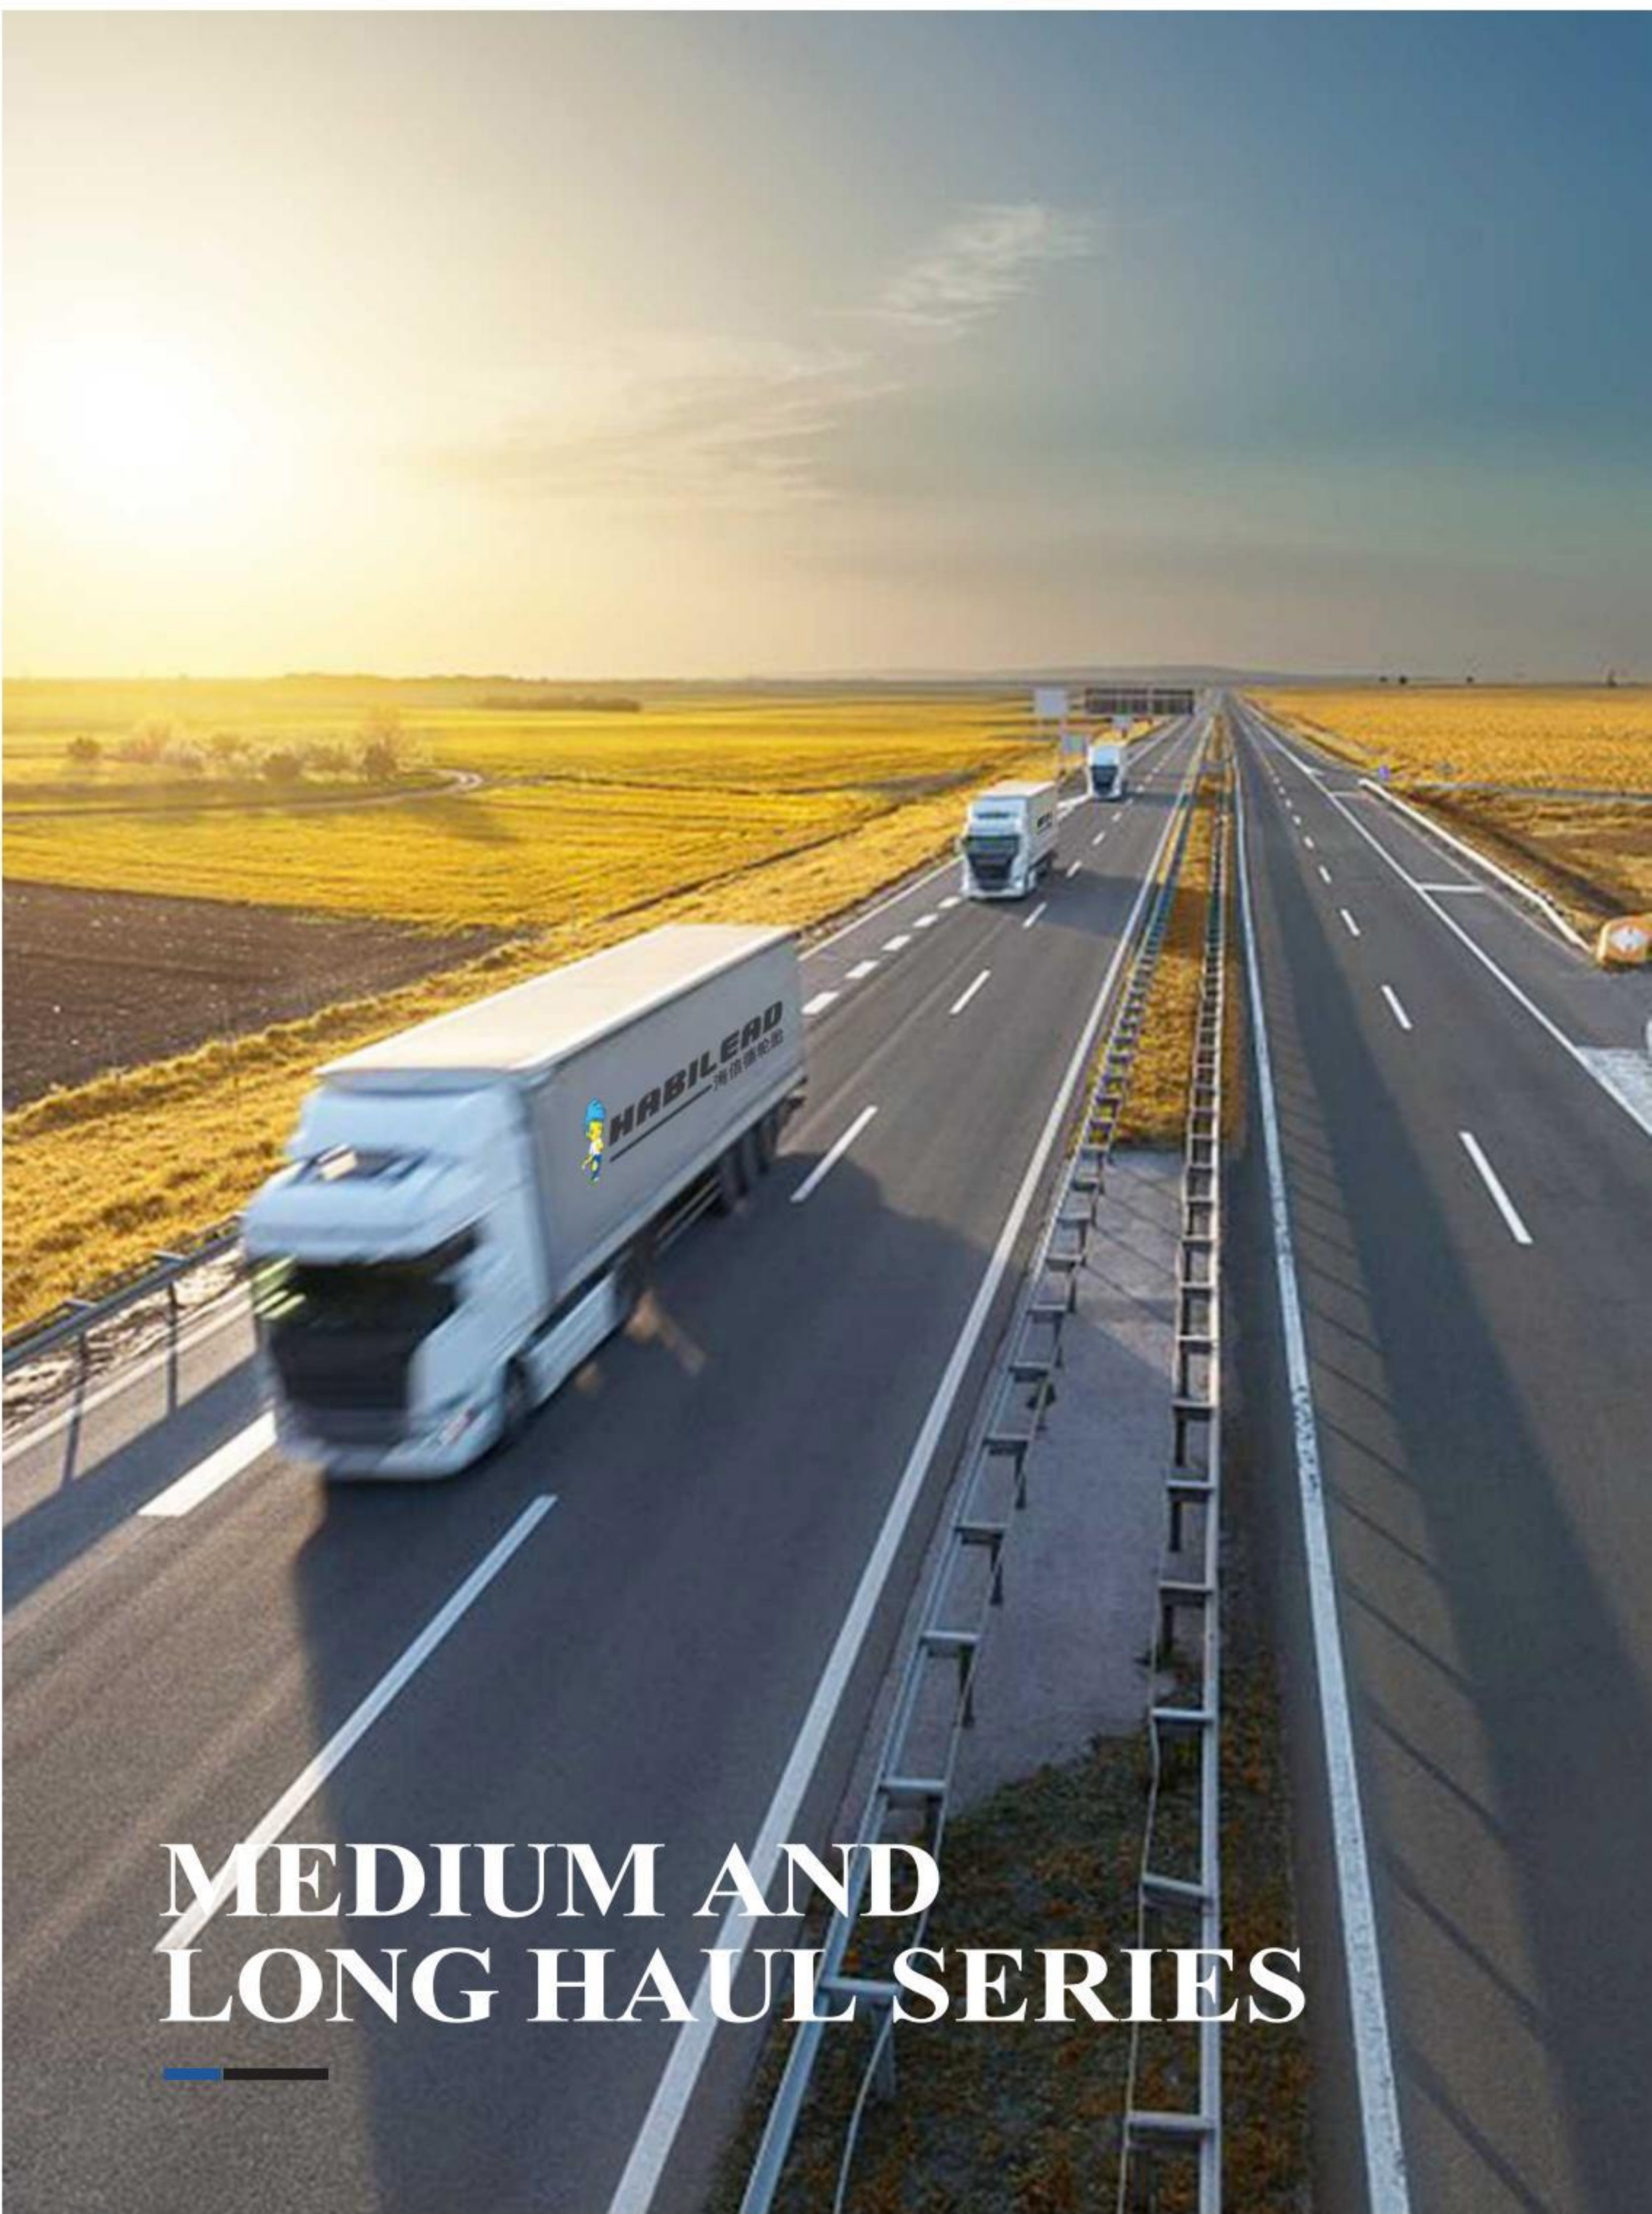

BL517

STANDARD LOAD, ULTRA WEAR RESISTANCE, STRONG DRIVING FORCE



Wide tread and advanced tread compound for higher mileage and superior traction performance.

Ultra-thin kerfs arrangement for low noise, safe and improving wet grip performance.

Abnormal wear and noise minimized by optimized ultra-thin kerfs arrangement.

Directional lug-groove for stone ejection.



Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
205/75R17.5	16	6.00	753	205	1650	3640	1550	3415	830	120	830	120	125/123	L
215/75R17.5	16	6.00	767	211	1750	3860	1600	3525	830	120	830	120	127/124	L
235/75R17.5	16	6.75	797	233	2000	4410	1850	4080	830	120	830	120	132/129	L
225/70R19.5	16	6.75	811	226	1900	4190	1800	3970	830	120	830	120	130/128	L
245/70R19.5	16	7.50	839	248	2180	4805	2060	4540	830	120	830	120	135/133	L
265/70R19.5	16	7.50	867	262	2430	5355	2240	4940	830	120	830	120	139/136	L
255/70R22.5	16	7.50	930	255	2500	5510	2300	5070	830	120	830	120	140/137	L
295/80R22.5	18	9.00	1044	298	3550	7830	3250	7160	900	130	900	130	152/149	M

BL518

STANDARD LOAD, ULTRA WEAR RESISTANCE, FUEL SAVING, COMFORT



Longer mileage by adoption of new cap tread compound, specially designed for long haul condition.

Abnormal wear and noise minimized by optimized ultra-thin kerfs arrangement.

Extra-robust 4 steel belts construction for higher mileage and comfortable driving experience.

Optimized groove angle with anti-zigzag design for stone rejection ability and groove crack prevention.



Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
6.50R16LT	12	5.50F	750	185	1060	2335	925	2040	670	97	670	97	110/105	L
7.00R16LT	12	5.50F	775	200	1215	2680	1060	2335	670	97	670	97	115/110	K
	14				1320	2910	1180	2600	770	112	770	112	118/114	K
11R22.5	14	8.25	1054	279	2800	6175	2650	5840	720	105	720	105	144/142	M
	16				3000	6610	2725	6005	830	120	830	120	146/143	L
275/70R22.5	16	8.25	958	276	2800	6175	2575	5675	830	120	830	120	144/141	M
295/60R22.5	16	9.00	923	292	3150	6930	2900	6380	830	120	830	120	148/145	M
	18				3350	7370	3075	6765	900	130	900	130	150/147	L

BL522

STANDARD LOAD, ULTRA WEAR RESISTANCE, STRONG DRIVING FORCE



Wide tread and advanced tread compound for higher mileage and superior traction performance.

Ultra-thin kerfs arrangement for low noise, safe and improving wet grip performance.

Abnormal wear and noise minimized by optimized ultra-thin kerfs arrangement.

Directional lug-groove for stone ejection.



Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
385/55R22.5	20	12.25	996	386	4500	9920	-	-	900	130	-	-	160	K
385/65R22.5	20	11.75	1072	389	4500	9920	-	-	900	130	-	-	160	K

BL526

ULTRA-HIGH WEAR RESISTANCE, LONG HAUL, STANDARD LOADING, COMFORT




Widened tread, low heat generation and super wear resistance recipes, ensuring long mileage over 400,000 kms.

Tread 3D interlocking pattern, providing not only better heat dissipation capacity and grip performance at the same time, but also reducing abnormal wear; together with new wear resistance recipe, providing 20% longer mileage than before.

Reducing tire jitter or offset and improving driving comfort by the adoption of 4 belt technique.



BL612 PIONEER PARTNER

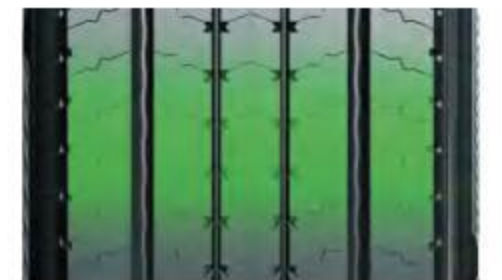

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
12R22.5	16	9.00	1085	300	3350	7380	3075	6780	830	120	830	120	150/147	M
	18				3550	7830	3250	7160	930	135	930	135	152/149	L

BL600

STANDARD LOAD, LONG HAUL, ULTRA WEAR RESISTANCE, COMFORT

● Apply ● Available ● Disable



Wide tread and wear-resistant formula ensures ultra-high mileage and provides strong driving force for the vehicle.



The ultra-thin cutter slot is arranged with mixed variable pitch, which can make the tread wear more uniform while realizing mute, prevent slope climbing and sliding in rainy days, and improve driving safety;



The application of 4-layer belt layer technology and anti bounce fine operation management can further improve the wear resistance and ensure passengers to enjoy a comfortable journey;



The directional groove shape design can effectively prevent stone inclusion.

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
295/80R22.5	18	9.00	1044	298	3550	7830	3250	7160	130	900	900	130	152/149	M
315/80R22.5	20	9.00	1076	312	4125	9090	3652	8050	125	860	900	125	157/153	M

BL611

STANDARD LOAD, LONG HAUL, ULTRA WEAR RESISTANCE, COMFORT

● Apply ● Available ● Disable



Wide tread and micro-particle carbon black material for higher mileage and superior traction performance.



Strengthen the rigidity of shoulder, improve high speed driving stability and prevent shoulder separation or burst.



New reinforced carcass material ensure the stability before and after tire inflation, reduce the driving deformation, improve uneven wear resistance and long mileage.

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
11R22.5	16	8.25	1065	279	3000	6610	2725	6005	830	120	830	120	146/143	L
12R22.5	16	9.00	1085	300	3350	7380	3075	6780	830	120	830	120	150/147	M
	18				3550	7830	3250	7160	930	135	930	135	152/149	L

BR616

HEAVY LOAD, STRONG DRIVING FORCE

● Apply ● Available ● Disable



Dynamic, low-strain carcass optimized design, super high-strength skeleton material used, provide surprisingly low-failure performance under the harsh operating conditions in driving wheel;

Directional pattern design, combined with the rigidity deviation of the front and rear landing angles, makes the entire life cycle wear smoothly. Combined with the ultra-high wear-resistant formula, this pattern has super wear-resistant performance.

Better running surface, appropriate tread depth, increased heat dissipation hole, and low rolling resistance carcass provide excellent fuel economy.

With low-noise pattern pitch design and asymmetric pattern design, lower the noise, provide more comfortable driving.

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load		Max. Air Pressure				Load Index	Speed Rating		
					Single		Double		Single				Double	
					KG	LBS	KG	LBS	KPa	PSI			KPa	PSI
12R22.5	18	9.00	1085	300	3550	7830	3250	7160	930	135	930	135	152/149	L


BM623

HEAVY LOAD, LONG SERVICE LIFE, DAMAGE RESISTANCE, LOW FAILURE RATE

● Apply ● Available ● Disable



The use of high wear and tear resistance formula improve the wear resistance performance on paved road and cut and tear resistance in bad road condition.

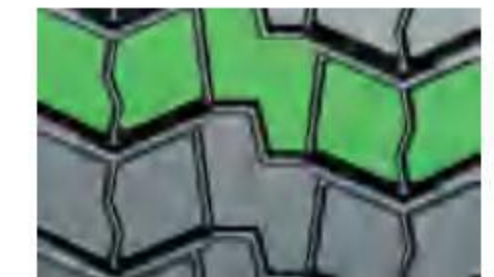


The low wavy design and the stone bouncing construction at the groove bottom can prevent stones from damaging or breaking the groove; the lug pattern design brings strong driving force, moderate impact and avoid blowout.



The strong framework material and bead structure improve the heavy load performance.

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load		Max. Air Pressure				Load Index	Speed Rating		
					Single		Double		Single				Double	
					KG	LBS	KG	LBS	KPa	PSI			KPa	PSI
12.00R24	20	8.5	1220	315	4500	9930	4125	9105	900	130	900	130	160/157	K

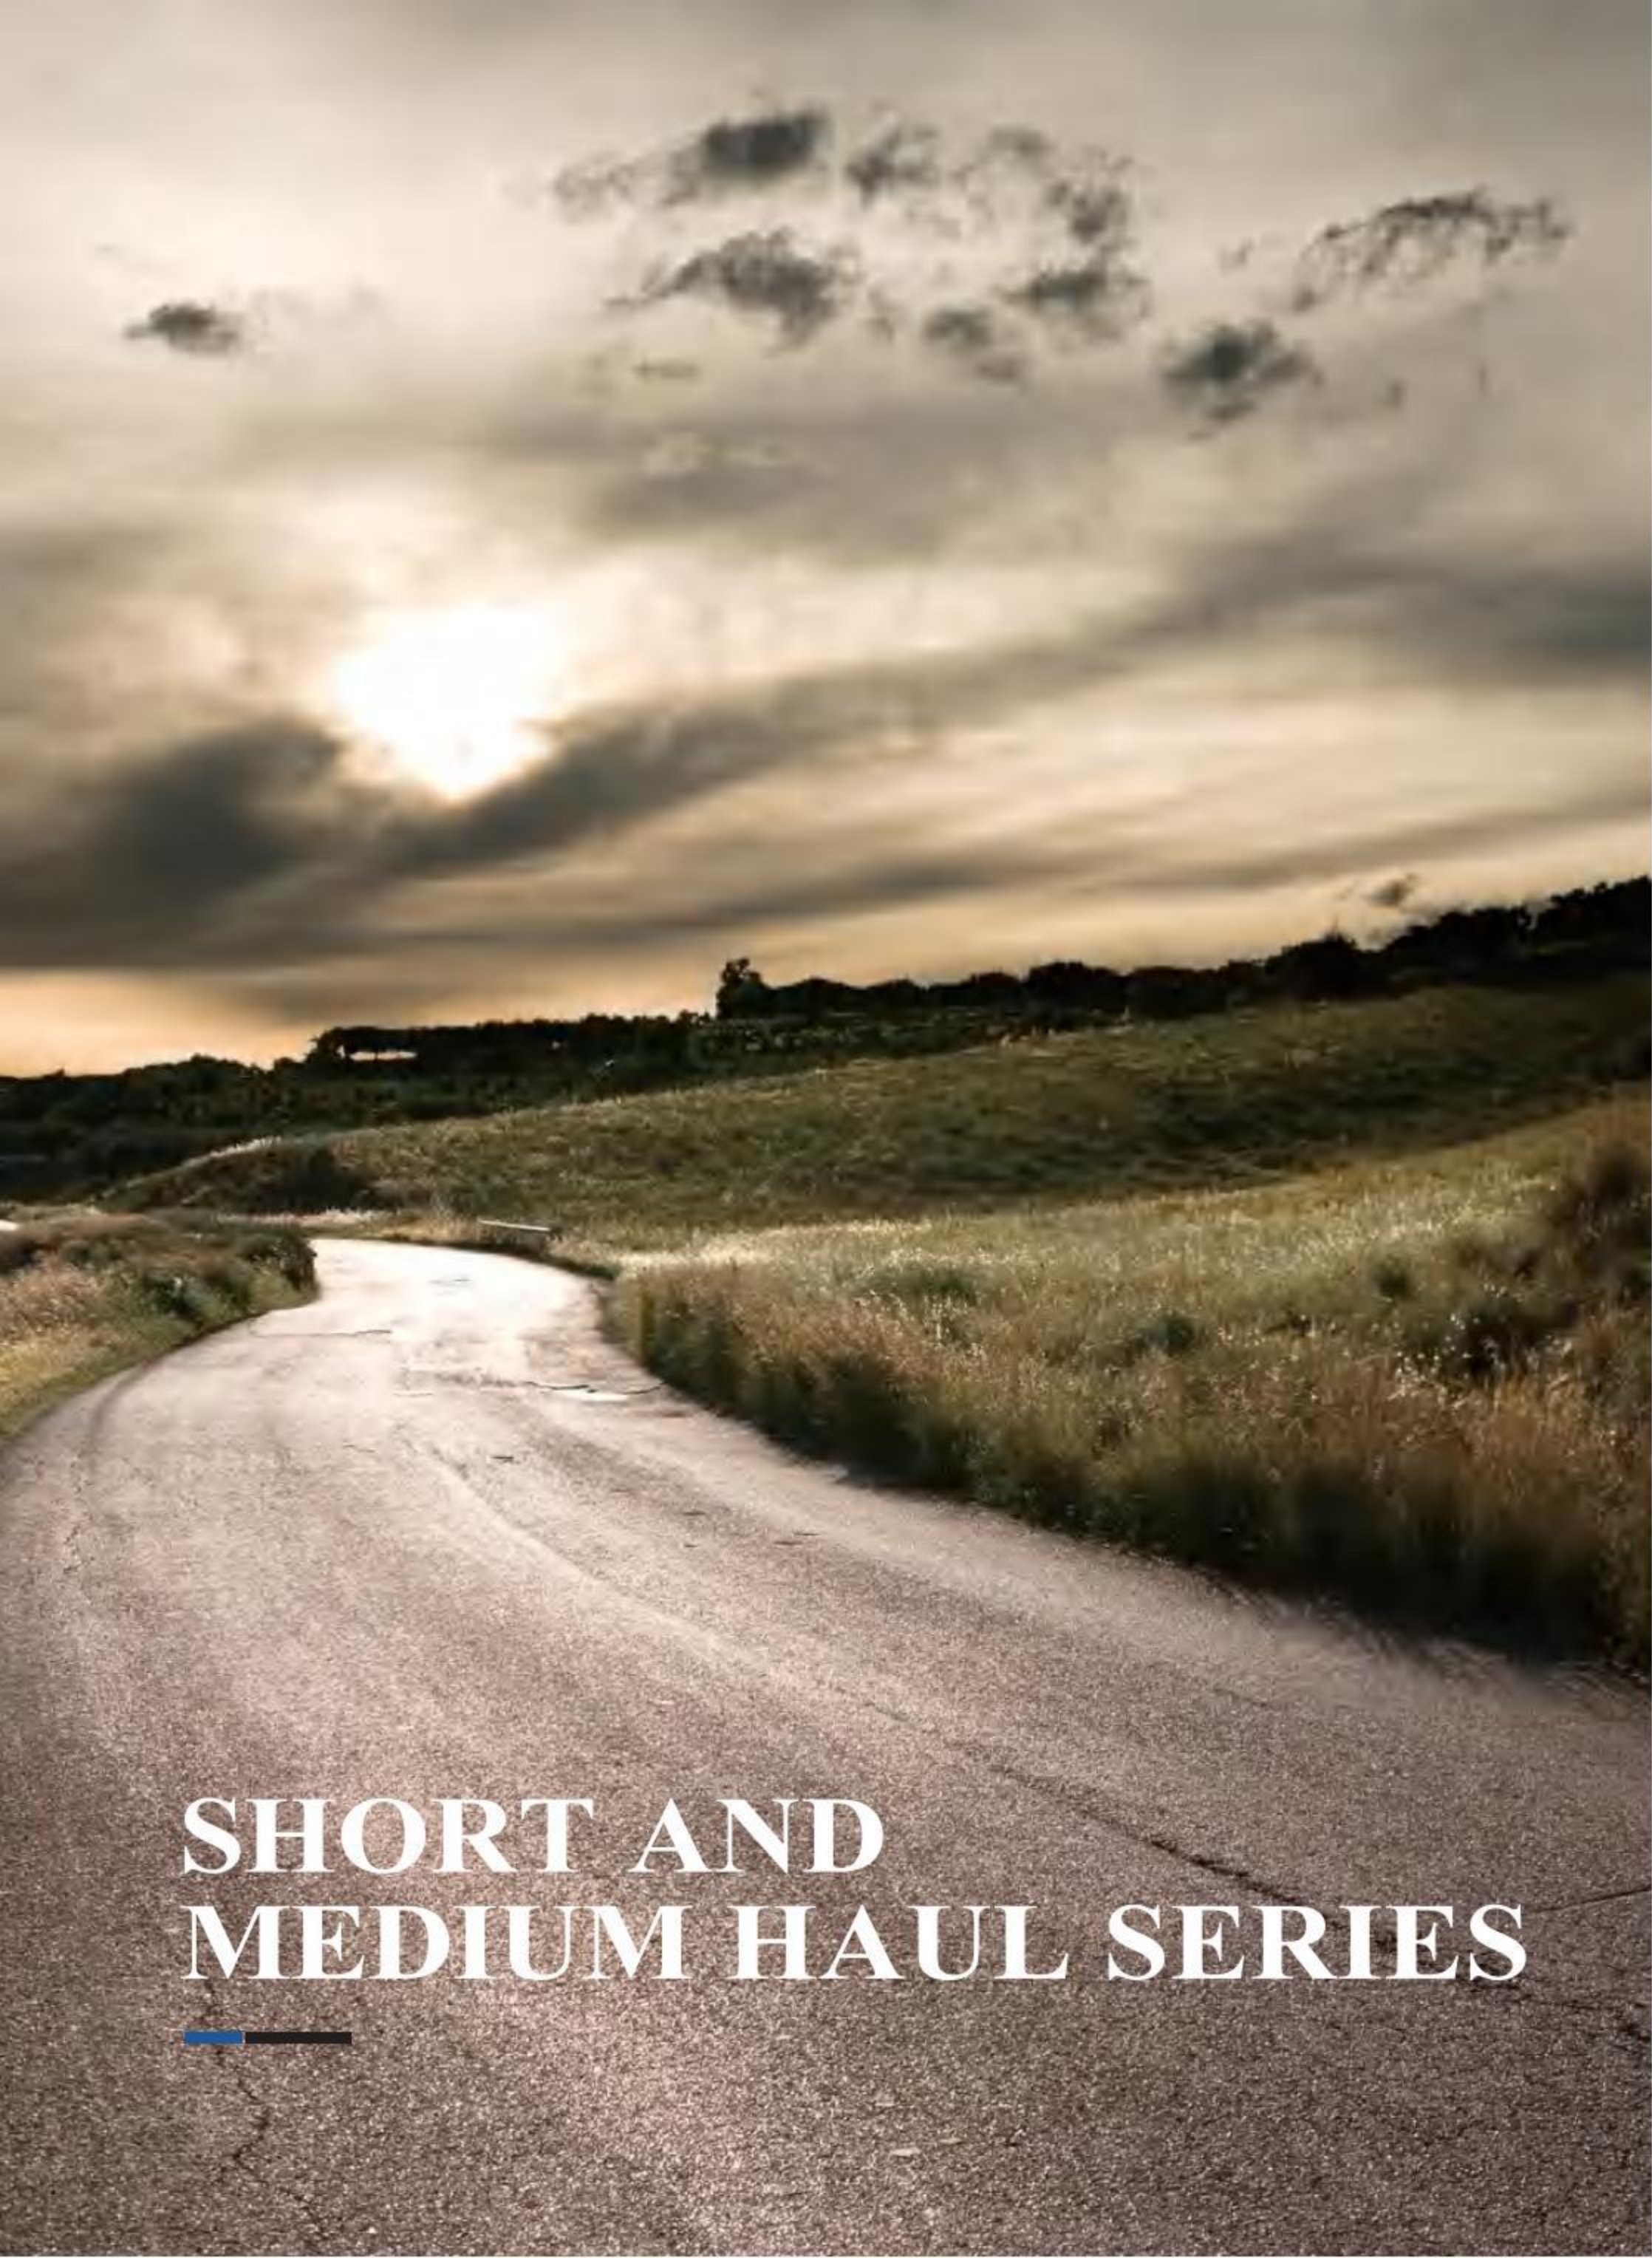

SHORT AND MEDIUM HAUL SERIES

BM628

HEAVY LOAD, DAMAGE RESISTANCE, LONG SERVICE LIFE

● Apply ● Available ● Disable



The formula with high abrasion resistance and tear resistance can be used on paved roads with high abrasion resistance ,excellent cutting resistance and block falling resistance when used on poor roads.



The blocks are used in the horizontal ditch and the stiffeners are used in the longitudinal ditch to prevent the stones from damaging the bottom of the ditch.



The transverse block pattern design can provide strong driving force for the vehicle, alleviate the impact energy and inhibit the impact blasting;

Proper and strong skeleton material selection and ring structure, as well as optimized shoulder image, can have appropriate load-bearing capacity.

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
11.00R20	16	8.00	1096	293	3350	7390	3075	6780	830	120	830	120	150/147	K
	18				3550	7830	3250	7160	930	135	930	135	152/146	J
12.00R20	18	8.50	1136	315	3750	8270	3450	7610	830	120	830	120	154/151	K
	20				4000	8820	3650	8050	930	130	930	130	156/153	J
12R22.5	18	9.00	1085	300	3550	7830	3250	7160	930	135	930	135	152/149	K

COMPANY PROFILE

TYRE INTRODUCTION

TYRE ORIENTATION CHART

LONGHAUL PIONEER SERIES

MEDIUM AND LONG HAUL SERIES

SHORT AND MEDIUM HAUL SERIES

MIXED AND MINING ROAD SERIES

KNOWLEDGE OF TYRE

BM628G

HEAVY LOAD, ULTRA WEAR RESISTANCE, ALL POSITION

● Apply ● Available ● Disable



Using super-strong skeleton material, super-strong rim structure, nylon reinforcement layer and shoulder shape optimization integration technology improve the heavy-duty capacity greatly.



The lateral block pattern design provide strong driving force under heavy-duty conditions, avoid hit-blasting significantly.

Special protrusions under horizontal grooves, Reinforced ribs at longitudinal grooves, prevent damage to the bottom of the grooves by stones.

Ultra-low heat build-up, tear-resistant formula inhibit heat build-up and prevent tread-delamination under heavy-duty , excellent cutresistance under harsh road.

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
12.00R20	20	8.5	1136	315	4000	8820	3650	8050	900	130	900	130	156/153	J
12R22.5	18	9.00	1085	300	3550	7830	3250	7160	930	135	930	135	152/149	K

BM638

HEAVY LOAD, STRONG DRIVING FORCE


● Apply ● Available ● Disable



Provide strong driving force, avoid hitblasting significantly.



Special ultra-low heat build-up, tear-resistant formula inhibits heat build-up under heavy-duty, Excellent anti-cut off on harsh roads.

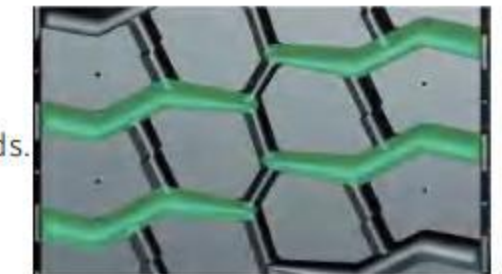

Double-layer tread with ultra-low heat build-up material formula, prevent the occurrence of tread-empty under heavy load.


Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
12.00R20	18	8.5	1125	315	3750	8270	3450	7610	830	120	830	120	154/151	K

BM638G


HEAVY LOAD, LONG SERVICE LIFE, DAMAGE RESISTANCE, LOW FAILURE RATE



The use of high wear and tear resistance formula improve the wear resistance performance on paved road and cut and tear resistance in bad road condition.

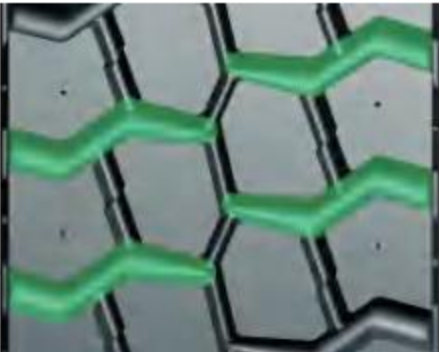


The low wavy design and the stone bouncing construction at the groove bottom can prevent stones from damaging or breaking the groove; the lug pattern design brings strong driving force, moderate impact and avoid blowout.

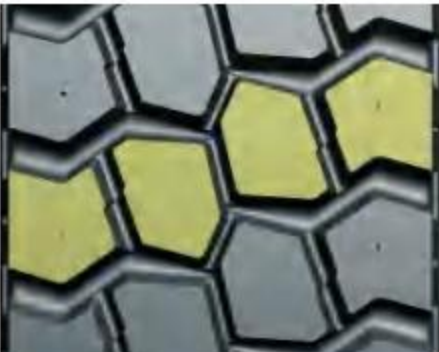

The strong framework material and bead structure improve the heavy load performance.



Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
12.00R20	20	8.5	1125	315	4000	8820	3650	8050	900	130	900	130	156/153	J

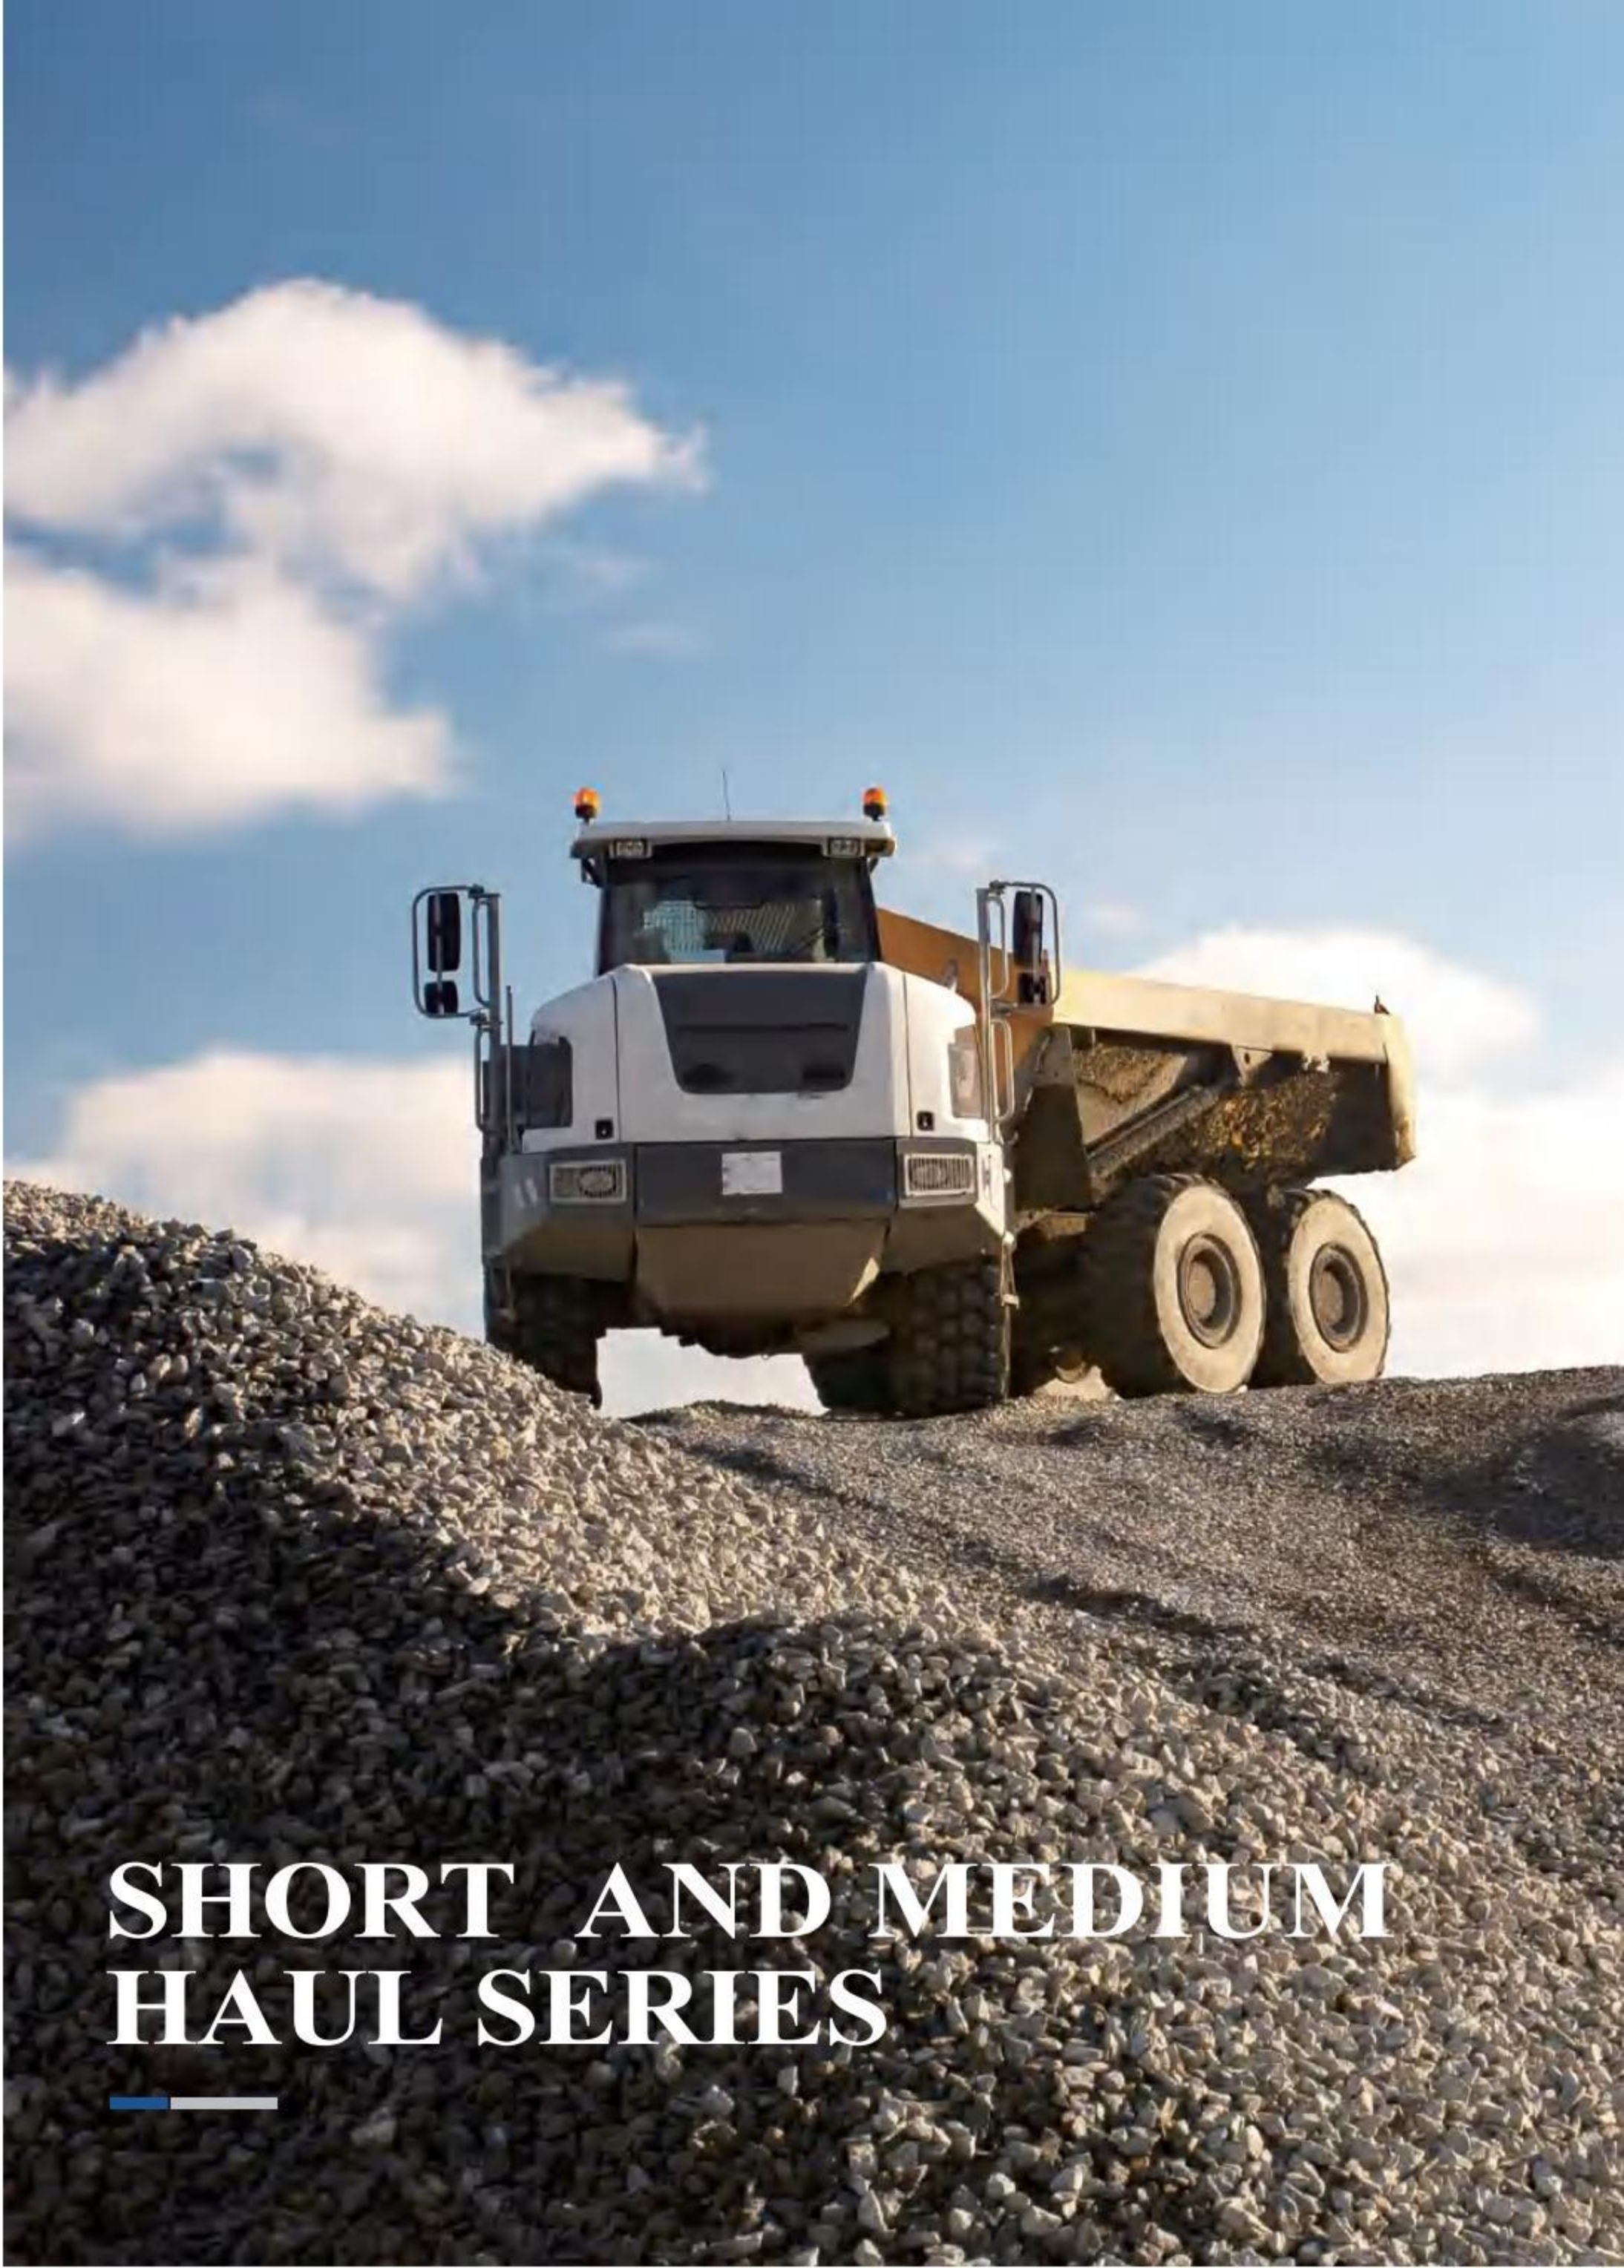

SHORT AND MEDIUM HAUL SERIES

BM638R

HEAVY LOAD, LONG SERVICE LIFE, DAMAGE RESISTANCE, LOW FAILURE RATE

● Apply ● Available ● Disable




The transverse block pattern design can provide strong driving force under heavy load conditions, mitigate impact energy and inhibit impact blasting.

The use of special ultra-low heat generation and tear resistance formula can inhibit the early void caused by heat accumulation under heavy load conditions, and has excellent anti cutting block performance when used on poor roads.

The tread adopts the formula of double-layer ultra-low heat generating material to prevent the occurrence of void accident under heavy load.

The use of stone blasting device can prevent the damage of stone inclusion to the ditch bottom and belt layer, and improve the safety and durability.

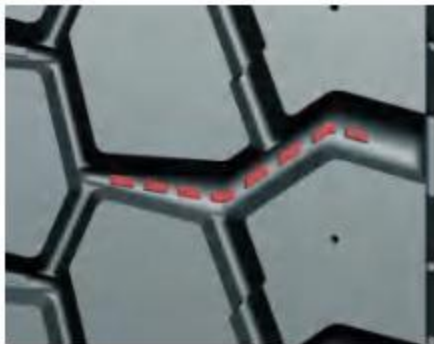

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
9.00R20	16	7.0	1019	259	3550	7830	3250	7160	930	135	930	135	144/142	K
12.00R20	18	8.5	1125	315	3750	8270	3250	7610	830	120	830	120	154/151	K

BM912

HEAVY LOADING, LONG USING LIFE, DAMAGE RESISTANCE



● Apply ● Available ● Disable



The design of three tortuous V-shaped large angle grooves makes it good maneuverability.

The compound of high wear resistance and tear resistance can be used on pavement roads with high abrasion resistance and excellent cutting resistance when run on poor roads.

The large stepped shoulder flower design work well both in heat dissipation, but also partial wear resistance.

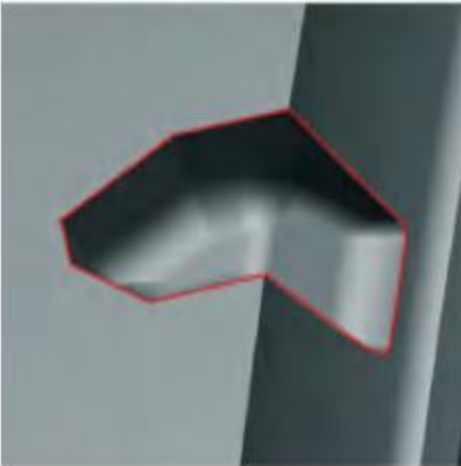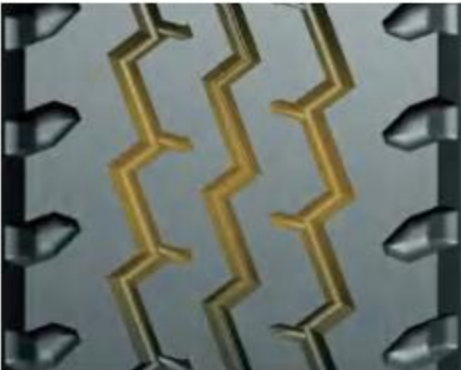

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
7.50R16LT	14	6.00	805	215	1500	3350	1320	2910	770	112	770	112	122/118	L
8.25R16LT	16	6.50	855	235	1800	3970	1600	3525	770	112	770	112	128/124	L
8.25R20	16	6.50	974	236	2430	5355	2300	5070	930	135	930	135	139/137	K
9.00R20	16	7.00	1019	259	2800	6175	2650	5840	900	130	900	130	144/142	K
12R22.5	18	9.00	1085	300	3550	7830	3250	7160	930	135	930	135	152/149	K

BM916

HEAVY LOAD, DAMAGE RESISTANCE, LONG SERVICE LIFE

● Apply ● Available ● Disable



V shape groove and stone ejection design, avoiding the impact on groove bottom and belt.



The ladder type design on shoulder for low heat and eccentric wear resistance.



Unique zigzag pattern design and special formula, providing better tear resistance performance on mixed road and wear resistance performance on pavement road.

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
6.50R16LT	12	5.50F	750	185	1060	2335	925	2040	670	97	670	97	110/105	L
7.00R16LT	12	5.50F	775	200	1215	2680	1060	2335	670	97	670	97	115/110	K
	14				1320	2910	1180	2600	770	112	770	112	118/114	K
7.50R16LT	14	6.00G	805	215	1500	3305	1320	2910	770	112	770	112	122/118	K
8.25R16LT	14	6.50H	855	235	1700	3745	1500	3305	670	97	670	97	126/122	K
	16				1800	3970	1600	3525	770	112	770	112	128/124	K
8.25R20	14	6.5	974	236	2240	4940	2120	4675	830	120	830	120	136/134	L
	16				2430	5355	2300	5070	930	135	930	135	139/137	K
9.00R20	14	7.0	1019	259	2575	5675	2430	5360	790	115	790	115	141/139	L
	16				2800	6175	2650	5840	900	130	900	130	144/142	K
10.00R20	16	7.5	1054	278	3000	6610	2725	6005	830	120	830	120	146/143	K
11.00R20	16	8.0	1085	293	3350	7390	3075	6780	830	120	830	120	150/147	K
	18				3550	7830	3250	7160	930	135	930	135	152/149	J
12.00R20	18	8.5	1125	315	3750	8270	3450	7610	830	120	830	120	154/151	K
	20				4000	8820	3650	8050	900	130	900	130	156/153	J
12R22.5	16	9.00	1085	300	3350	7380	3075	6780	830	120	830	120	150/147	L
	18				3550	7830	3250	7160	930	135	930	135	152/149	K
13R22.5	18	9.75	1124	320	3750	8270	3450	7610	830	120	830	120	154/151	K
295/80R22.5 (G)	18	9.00	1044	298	3550	7810	3250	7150	900	130	900	130	152/149	M
315/80R22.5 (G)	20	9.00	1076	312	4125	9075	3650	8030	860	125	860	125	157/153	L



SHORT AND MEDIUM HAUL SERIES

BM918

HEAVY LOAD, DAMAGE RESISTANCE, LONG SERVICE LIFE

● Apply ● Available ● Disable



The irregular block pattern design can not only provide strong driving force but also rest rain tyre impact burst.



Stone ejectors in cross ditch and the reforce rib with longitudinal groove can avoid the groove bottom damage by gravels.



Excellent cutting resistance,dropping resistance on rough raod and excellent wear resistanceon on pavement road with widden pattern of exclusive formula.

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
12R22.5	18	9.00	1085	300	3550	7830	3250	7160	930	135	930	135	152/149	K

BM919

OVERLOAD, DAMAGE RESISTANCE, LOW FAILURE RATE

● Apply ● Available ● Disable



3 zigzag grooves pattern design and special formula, providing better tear resistance performance on mixed road and wear resistance performance on pavement road.



The ladder type design on shoulder for low heat and eccentric wear resistance.



Special formula providing superior tear resistance and cut resistance performance.

Gseries, enhanced bead with nylon and strong carcass design, 0 degree structure on shoulder, providing superior performance under heavy load conditions.

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
12.00R20	18	8.5	1125	315	3750	8270	3450	7610	830	120	830	120	150/147	K
315/80R22.5	20	9.00	1076	312	4125	9090	3650	8050	860	125	860	125	157/153	L

BR921


HEAVY LOAD, ALL POSITION, ULTRA WEAR RESISTANCE



Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
12.00R24	20	8.5	1220	315	4500	9930	4125	9105	900	130	900	130	160/157	K

BR922

STANDARD LOAD, LONG HAUL, ULTRA WEAR RESISTANCE, COMFORT

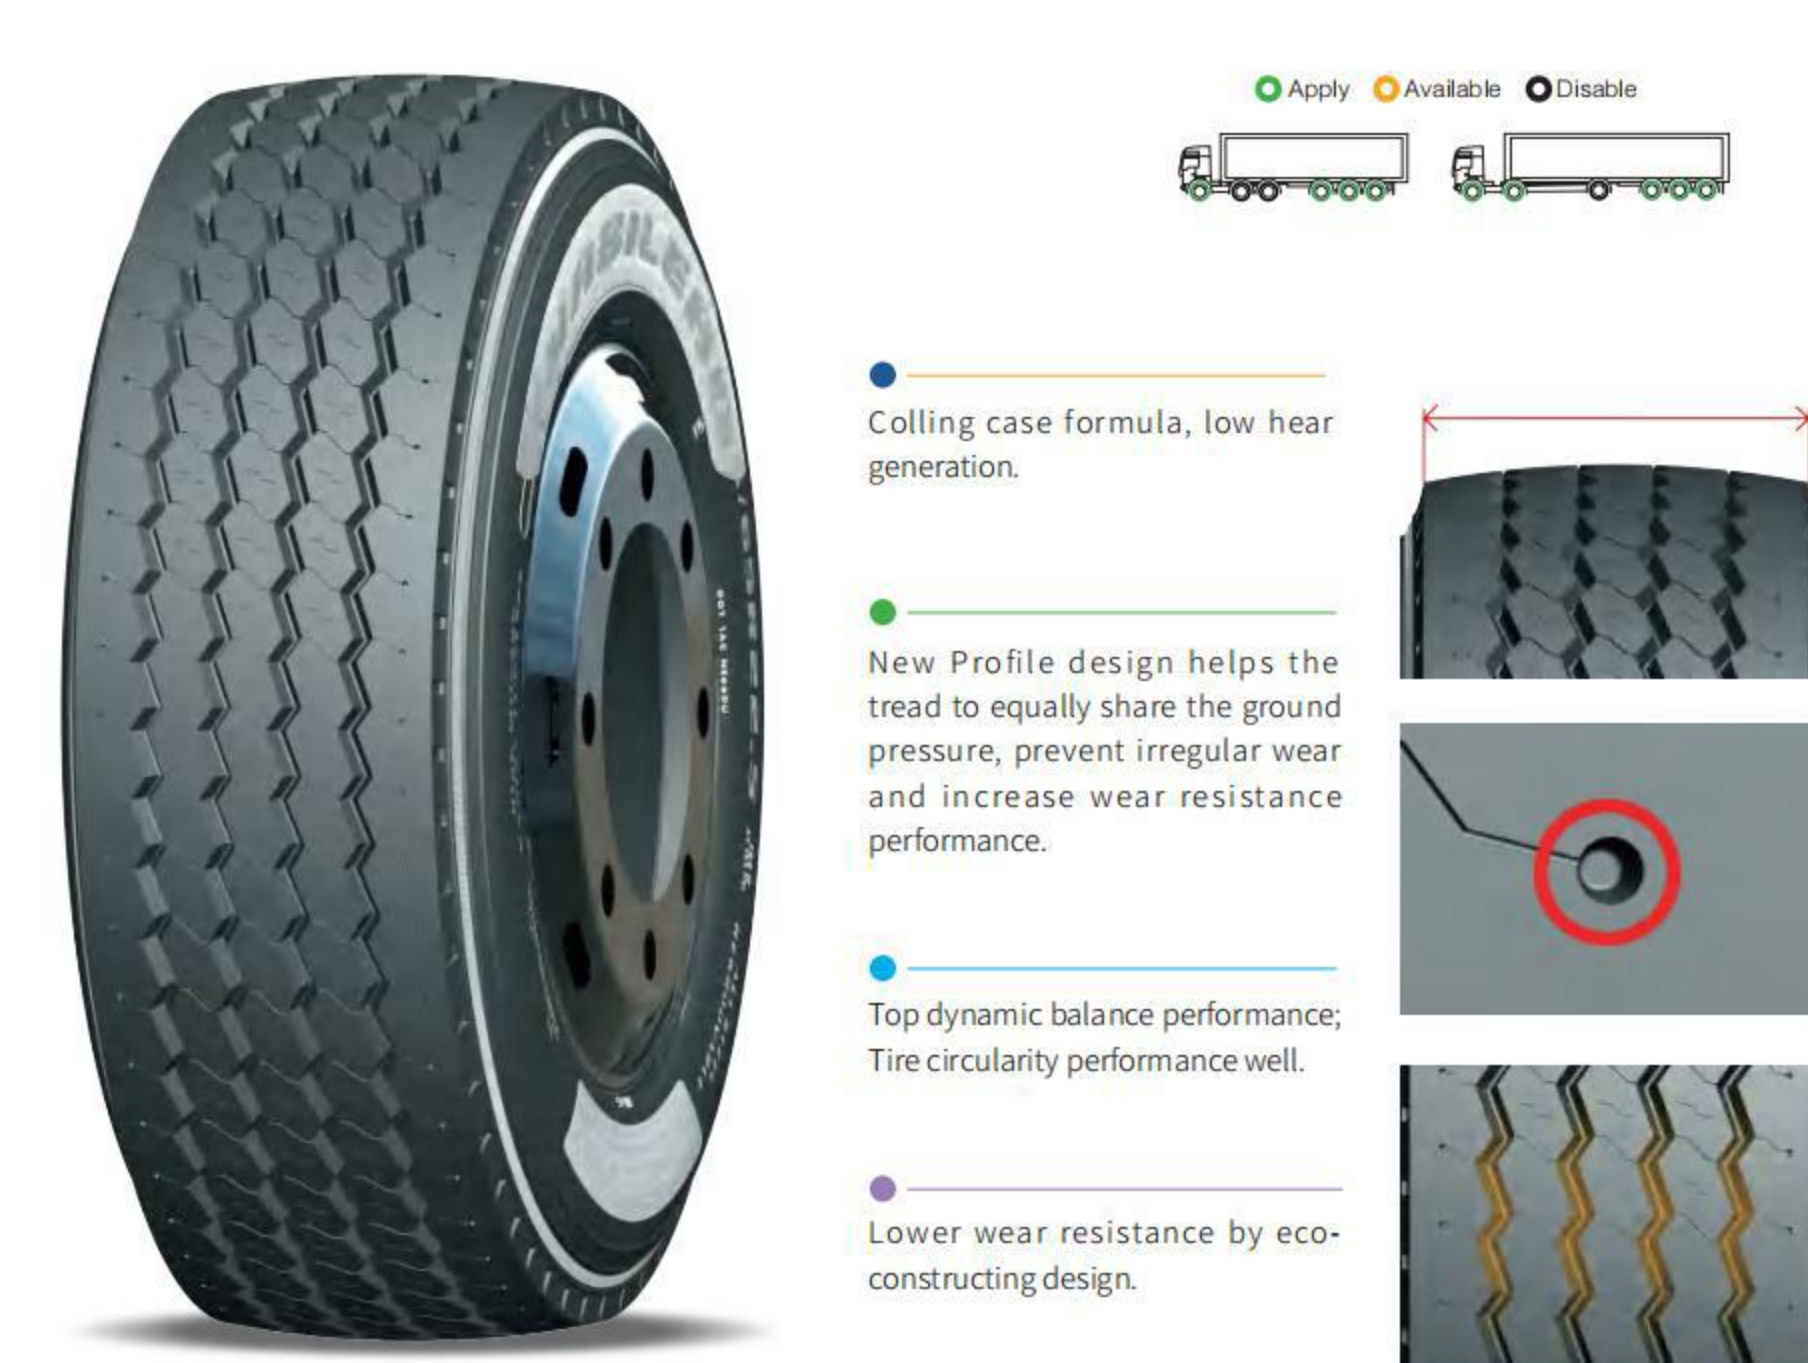

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load		Max. Air Pressure				Load Index	Speed Rating		
					Single		Double		Single				Double	
					KG	LBS	KG	LBS	KPa	PSI			KPa	PSI
385/65R22.5	20	11.75	1072	389	4500	9920	-	-	900	130	-	-	160	K
425/65R22.5	20	12.25	1124	422	5000	11000	-	-	830	120	-	-	164	K

BR923

STANDARD LOAD, ULTRA WEAR RESISTANCE, STRONG DRIVING FORCE




Wide tread and advanced tread compound for higher mileage and superior traction performance.



Ultra-thin kerfs arrangement for low noise, safe and improving wet grip performance.




Abnormal wear and noise minimized by optimized ultra-thin kerfs arrangement.

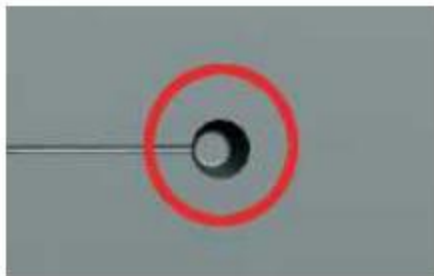

Directional lug-groove for stone ejection.

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
385/55R22.5	20	12.25	996	386	4500	9920	-	-	900	130	-	-	160	K
425/65R22.5	20	12.25	1124	422	5000	11000	-	-	830	120	-	-	164	K

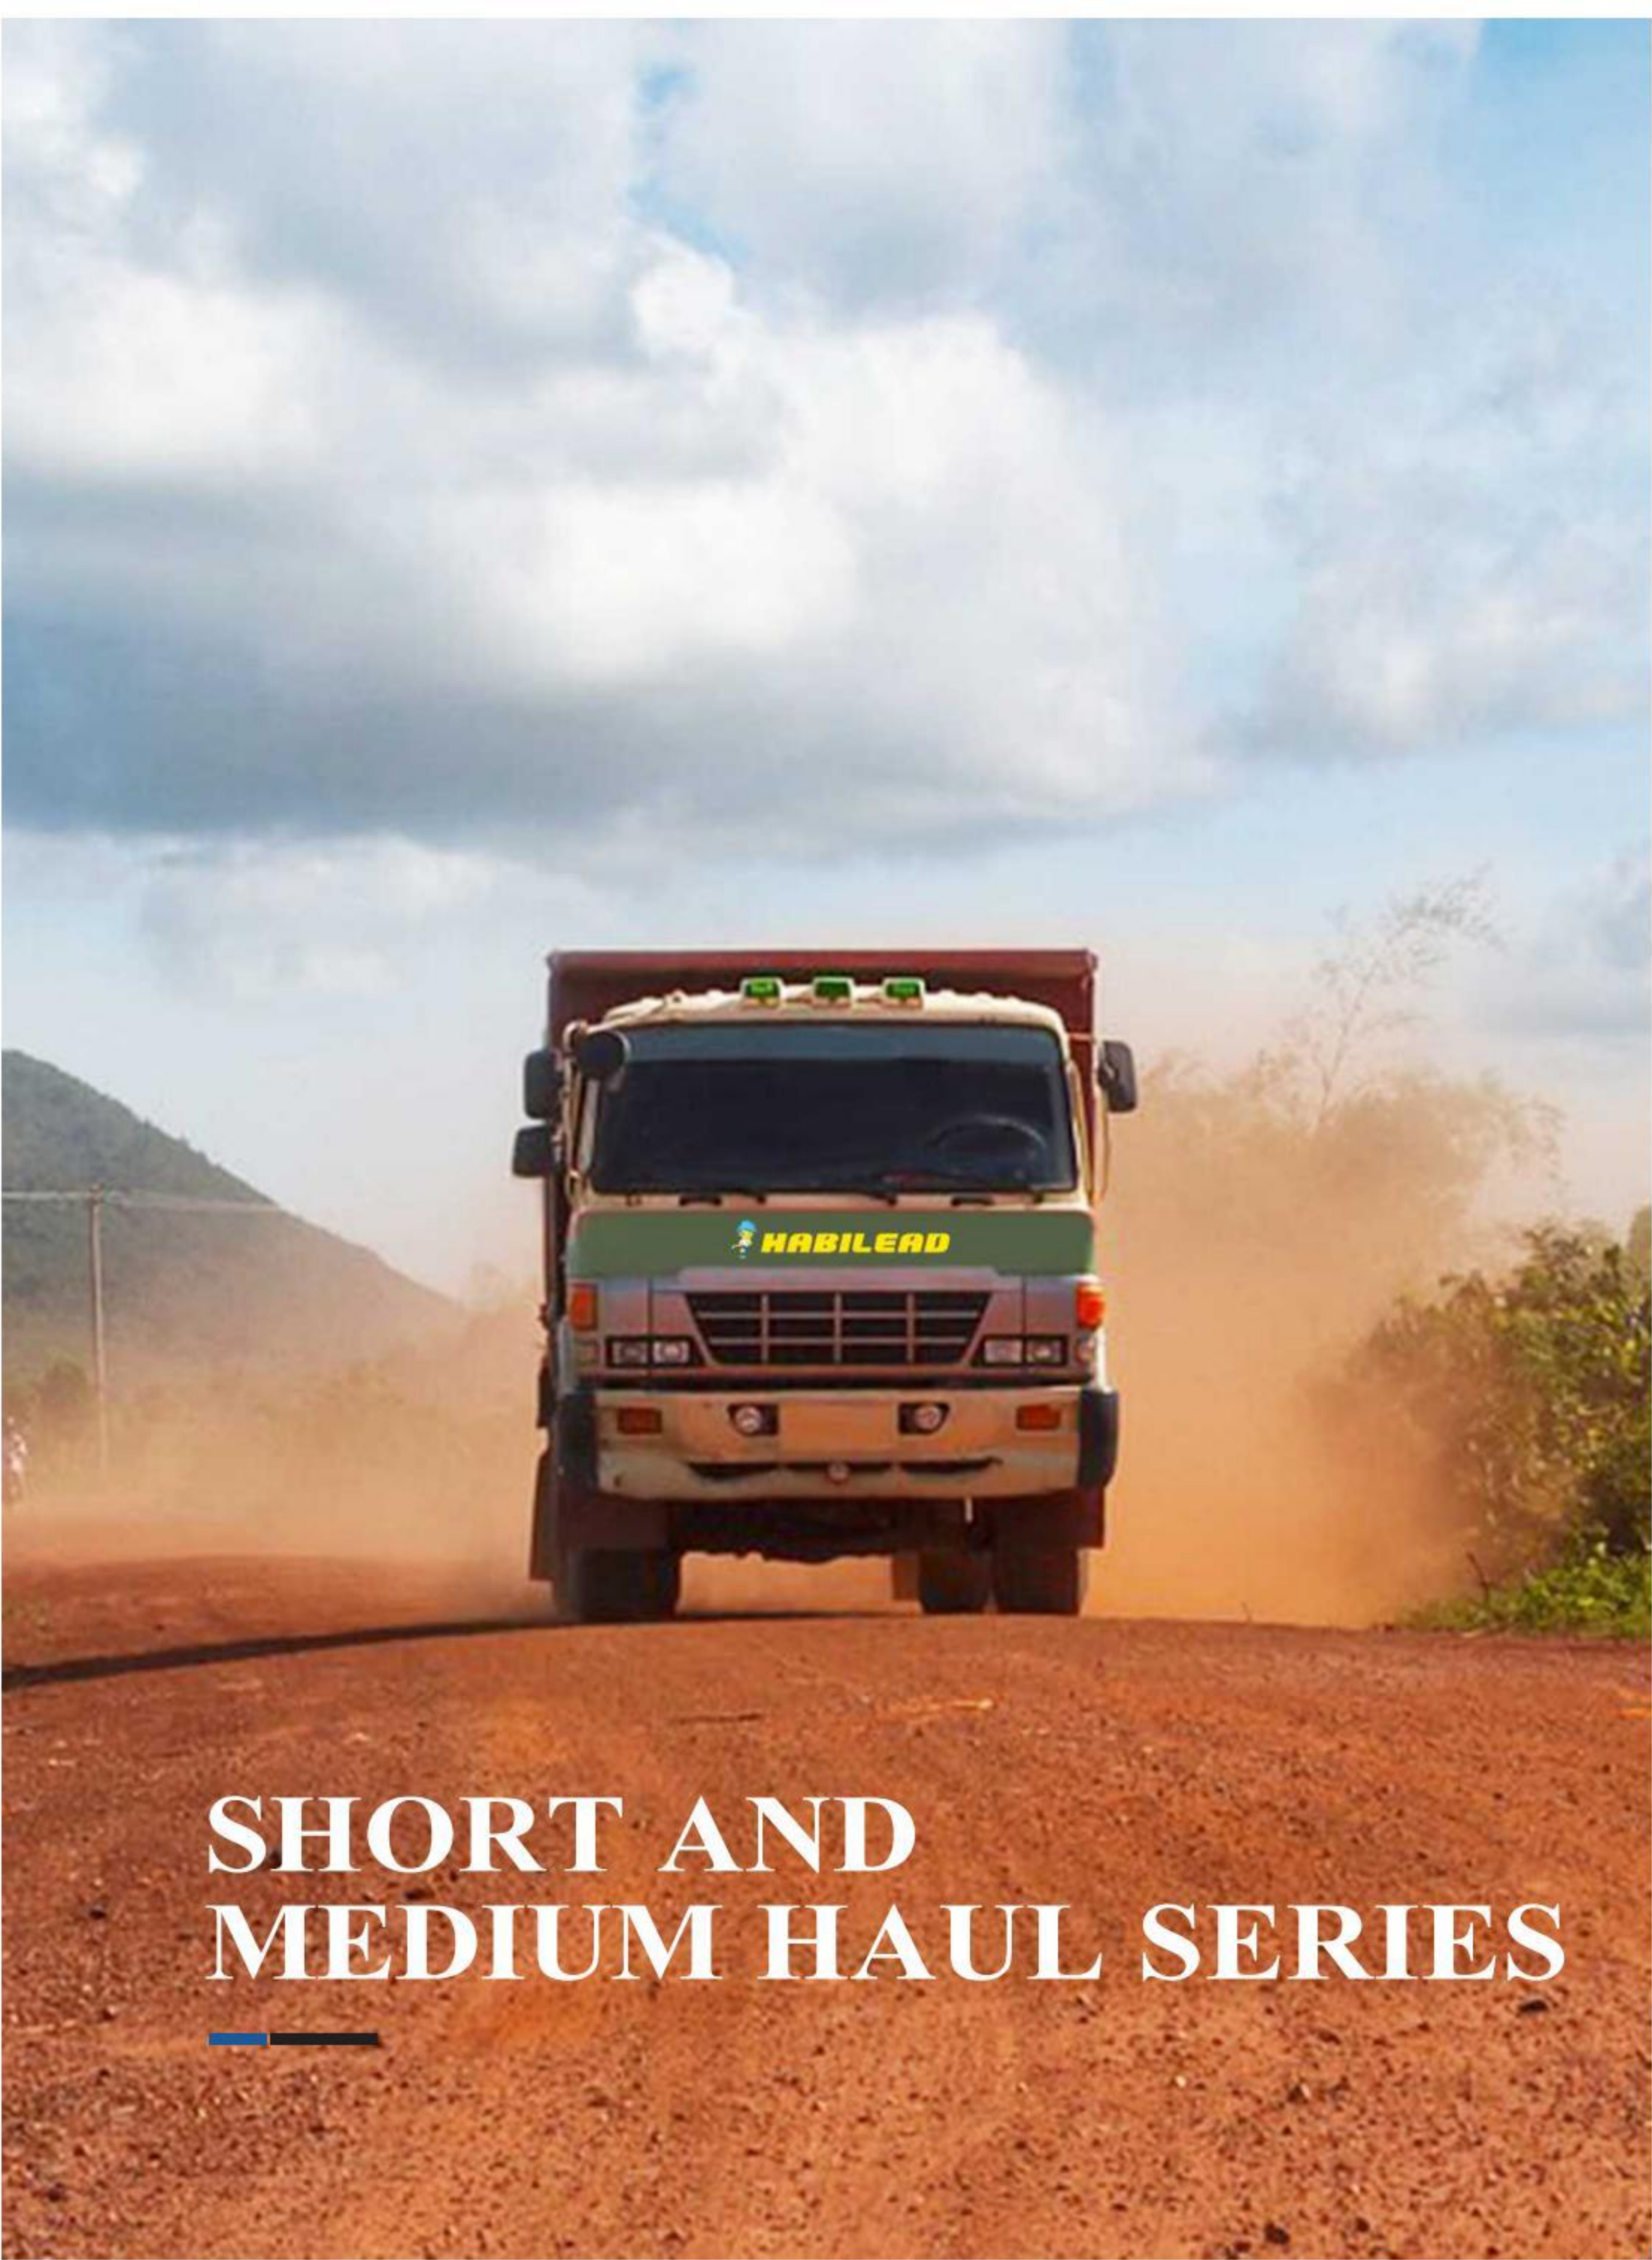

SHORT AND MEDIUM HAUL SERIES

BO633

HEAVY LOAD, PUNCTURE RESISTANCE, IMPACT RESISTANCE,
CHUNKING RESISTANCE

● Apply ● Available ● Disable



Industrial and mining usage. Strong overload resistance; Low accident rate, more secure; Cutting resistance.

Big block pattern, suitable for strong driving performance on harsh road; stone ejection design, reducing impact on groove bottom.

Open groove and stone ejection design, reducing impact on groove bottom.

New special formula, providing great puncture resistance tear resistance in poor road conditions.



Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
11.00R20	16	8.0	1096	293	3350	7390	3075	6780	830	120	830	120	150/147	G
	18				3550	7830	3250	7160	930	135	930	135	152/149	F
12.00R20	18	8.5	1136	315	3750	8270	3450	7610	830	120	830	120	154/151	F
	20				4000	8820	3650	8050	930	130	930	130	156/153	E

BO636

OVERLOAD, PUNCTURE RESISTANCE, IMPACT RESISTANCE,
CHUNKING RESISTANCE

● Apply ● Available ● Disable



Industrial and mining usage. Strong overload resistance; Low accident rate, more secure; Cutting resistance.

Big block pattern, suitable for strong driving performance on harsh road.

Open groove and stone ejection design, reducing impact on groove bottom.

New special formula, providing great puncture resistance tear resistance in poor road conditions.



Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
11.00R20	18	8.0	1098	293	3550	7830	3250	7160	930	135	930	135	152/149	F
12.00R20	20	8.5	1135	315	4000	8820	3650	8050	930	130	930	130	156/153	E

BO636(G)

OVERLOAD, PUNCTURE RESISTANCE, IMPACT RESISTANCE,
CHUNKING RESISTANCE

● Apply ● Available ● Disable



Big block pattern, suitable for strong driving performance on harsh road.



G series, enhanced bead with nylon and strong carcass design, 0 degree structure on shoulder, providing superior performance under heavy load conditions.



Open groove and stone ejection design, reducing impact on groove bottom.



New special formula for mining, providing great puncture resistance and tear resistance in poor road conditions.

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
11.00R20	16	8.0	1096	293	3350	7390	3075	6780	830	120	830	120	150/147	G
	18				3550	7830	3250	7160	930	135	930	135	152/149	F
12.00R20	18	8.5	1136	315	3750	8270	3450	7610	830	120	830	120	154/151	F
	20				4000	8820	3650	8050	900	130	900	130	156/153	E

BO639

HEAVY LOAD, PUNCTURE RESISTANCE, IMPACT RESISTANCE,
CHUNKING RESISTANCE

● Apply ● Available ● Disable



The big block design provides strong driving force on mining road.



The open groove and stone bouncing construction can prevent stones from damaging or breaking the groove.



The new cut resistance formula on mining road ensures the puncture and cut resistance performance.

Size	PR	Standard Rim (Inch)	Outside Diameter (mm)	Section Width (mm)	Max. Load				Max. Air Pressure				Load Index	Speed Rating
					Single		Double		Single		Double			
					KG	LBS	KG	LBS	KPa	PSI	KPa	PSI		
295/80R22.5	18	9.00	1044	298	3550	7830	3250	7160	900	130	900	130	152/149	F
11R22.5	16	8.25	1054	279	3000	6610	2725	6005	830	120	830	120	146/143	F
12R22.5	18	9.00	1085	300	3550	7830	3250	7160	930	135	930	135	152/149	F
12.00R20	18	8.50	1125	315	3750	7830	3450	7160	930	135	830	135	154/151K	F



MINE SITE SERIES

SIZE	PATTERN
6.50R16LT-12PR	 BL518 12PR
7.00R16LT-14PR	 BL518 14PR
7.50R16LT-14PR	 BM912 14PR
8.25R16LT-16PR	 BM912 16PR
8.25R20-16PR	 BM912 16PR
9.00R20-16PR	 BM638R 16PR  BM912 16PR
10.00R20-16PR	 BM916 16PR
11.00R20-16PR 18PR	 BM916 18PR  BM628 18PR  BO633 16/18PR  BO636 18PR  BM918 18PR

SIZE	PATTERN
12.00R20-18PR -20PR	 [ⓐ]  [Ⓡ] [ⓐ]       
12.00R24-20PR	  
11R22.5-16PR	  
12R22.5-16PR 18PR	        [ⓐ] 
13R22.5-12PR 18PR	 
205/75R17.5 215/75R17.5 235/75R17.5 225/70R19.5-16PR 245/70R19.5 265/70R19.5 255/70R22.5	

SIZE	PATTERN
275/70R22.5-16PR	
275/80R22.5-18PR	
295/60R22.5-18PR	  
295/80R22.5-16PR -18PR	 [ⓐ]   
315/80R22.5-20PR	 [ⓐ]  
385/55R22.5-20PR	 
385/65R22.5-20PR	 
425/65R22.5-20PR	 

SORT	RFT / UHP	UHP	H/P-A/S
PATTERN	K3000 	S2000 	H202 
PERFORMANCE	   	   	   

SORT	H/P	H/P	4 SEASON
PATTERN	K737 	S801 	A4 
PERFORMANCE	   	   	   

SORT	H/P	Drifting	H/T
PATTERN	H206 	S3000 	RS21 
PERFORMANCE	   	   	   

SORT	H/P	A/T	M/T
PATTERN	RS26 	RS23 	RS25 
PERFORMANCE	   	   	   

SORT	VAN/LTR/TAXI	S/T	WINTER
PATTERN	RS01 	RS03 	AW11 
PERFORMANCE	   	   	   

SORT	WINTER	WINTER	WINTER
PATTERN	AW33 	RW506 	RW505 
PERFORMANCE	   	   	   

Born for safe driving, better performance


The RFT technology used by the Roadboss brand, under certain circumstances, can effectively prevent the vehicle from running out of control due to puncture. Not only that, it strengthens the sidewall support and makes the tire perform well.



Performance visualization

dry ———
wet ———
athletic ———
comfortable ———
Mute ———

Run Flat Technology (RFT)

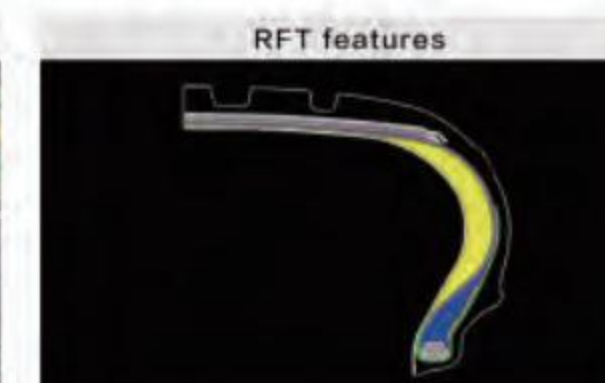

K3000

35/40/45/50/55

The K3000 is a high-performance sport and safety tire (UHP), specially developed for medium and high-class passenger cars. It maintains the support and control of the tire to ensure your driving safety under the condition of air shortage.




Adopt imported Rayon as skeleton material, high flexure strength and excellent stability;



multi-pitch design, improve drainage performance and wetland grip, effectively reduce noise during driving;



Silencer design, disrupt the pattern groove high-speed airflow, reduce the noise caused by the pumping effect, to provide you with a more quiet space.

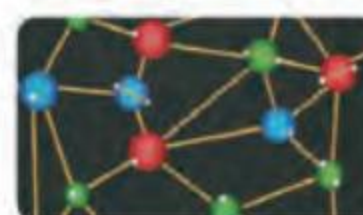

Low heat generation support rubber formula, the tire after the support to continue driving.



Asymmetric pattern, outside reinforcement design, effectively inhibit the vehicle turning or braking deformation, turning to provide more powerful support, excellent dry handling performance and braking performance;

Size				LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
						inch	kg	kPa	mm	mm	
205	/	55	ZRF	16	94W	XL	6.5	670	340	632	214
205	/	45	ZRF	17	88W	XL	7.0	560	340	616	206
205	/	50	ZRF	17	93W	XL	6.5	650	340	638	214
225	/	45	ZRF	17	94W	XL	7.5	670	340	634	225
225	/	50	ZRF	17	98W	XL	7.0	750	340	658	233
225	/	55	ZRF	17	101W	XL	7.0	825	340	680	233
225	/	40	ZRF	18	92W	XL	8.0	630	340	637	230
225	/	45	ZRF	18	95W	XL	7.5	690	340	659	225
225	/	50	ZRF	18	99W	XL	7.0	775	340	683	233
245	/	45	ZRF	18	100W	XL	8.0	800	340	677	243
255	/	40	ZRF	18	99Y	XL	9.0	775	340	661	260
235	/	45	ZRF	19	99Y	XL	8.0	775	340	695	236
235	/	50	ZRF	19	103W	XL	7.5	875	340	719	245
235	/	55	ZRF	19	105W	XL	7.5	925	340	741	245
245	/	40	ZRF	19	98Y	XL	8.5	750	340	679	248
245	/	45	ZRF	19	102Y	XL	8.0	850	340	703	243
245	/	50	ZRF	19	105W	XL	7.5	925	340	729	253
255	/	45	ZRF	19	104W	XL	8.5	900	340	713	255
255	/	50	ZRF	19	107W	XL	8.0	975	340	739	265
275	/	35	ZRF	19	100Y	XL	9.5	800	340	675	278
275	/	40	ZRF	19	105W	XL	9.5	925	340	703	278
245	/	40	ZRF	20	99Y	XL	8.5	775	340	704	248
245	/	45	ZRF	20	103Y	XL	8.0	875	340	728	243
275	/	40	ZRF	20	106W	XL	9.5	950	340	728	278
315	/	35	ZRF	20	110Y	XL	11	1060	340	728	320



S2000

35/40/45/50/55

S2000 seeks exercise limit and extreme experience. The excellen high speed ability,handling in both dry and wet conditions,security and green design,make it to be preferred choice for luxury cars,Her stable performance is worthy of your trust.



Special asymmetrical design provides excellent grip and handling in both dry wet conditions.




The updated SSBPand silica compound provide excellent wet grip,much reduced rolling resistance,and terrific handling in high speed.



Sipes on outside shoulder enhance turning handling andlow down noise in high speed.



The dramatic2 central big grooves with special compound,enhances efficient water evacuation to deal with all conditions

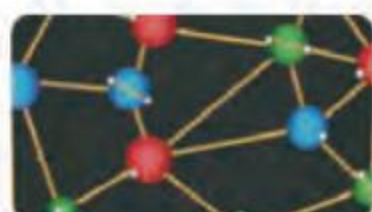

The high content white carbon black and solution polymerized SBR were used in tread formulation to reduce rolling resistance and improve the performance of wetland.



Size					LI&SS	/XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
195	/	45	R	16	84V	XL	6.5	500	340	582	195	
195	/	50	R	16	88V	XL	6.0	560	340	602	201	
195	/	55	R	16	91V	XL	6.0	615	340	620	201	
205	/	45	ZR	16	87W	XL	7.0	545	340	590	206	
205	/	50	ZR	16	91W	XL	6.5	615	340	612	214	
205	/	55	ZR	16			6.5	615	300	632	214	
205	/	55	ZR	16	94W	XL	6.5	670	340	632	214	
215	/	45	ZR	16	90W	XL	7.0	600	340	600	213	
215	/	55	ZR	16	97W	XL	7.0	730	340	642	226	
225	/	50	ZR	16	96W	XL	7.0	710	340	632	233	
225	/	55	ZR	16	99W	XL	7.0	775	340	654	233	
205	/	40	ZR	17	84W	XL	7.5	500	340	596	212	
205	/	45	ZR	17	88W	XL	7.0	560	340	616	206	
205	/	50	ZR	17	93Y	XL	6.5	650	340	638	214	
215	/	40	ZR	17	87W	XL	7.5	545	340	604	218	
215	/	45	ZR	17	91W	XL	7.0	615	340	626	213	
215	/	50	ZR	17	95W	XL	7.0	690	340	648	226	
215	/	55	ZR	17	98W	XL	7.0	750	340	668	226	
225	/	45	ZR	17	94W	XL	7.5	670	340	634	225	
225	/	50	ZR	17	98W	XL	7.0	750	340	658	233	
225	/	55	ZR	17	101W	XL	7.0	825	340	680	233	
235	/	45	ZR	17	97W	XL	8.0	730	340	644	236	
235	/	50	ZR	17	100W	XL	7.5	800	340	668	245	
235	/	55	ZR	17	103W	XL	7.5	875	340	690	245	
245	/	40	ZR	17	95W	XL	8.5	690	340	628	248	
245	/	45	ZR	17	99W	XL	8.0	775	340	652	243	
255	/	45	ZR	17	102Y	XL	8.5	850	340	662	255	
215	/	35	ZR	18	84Y	XL	7.5	500	340	607	218	
215	/	40	ZR	18	89Y	XL	7.5	580	340	629	218	
215	/	45	ZR	18	93W	XL	7.0	650	340	651	213	
225	/	40	ZR	18	92W	XL	8.0	630	340	637	230	
225	/	45	ZR	18	95W	XL	7.5	690	340	659	225	
235	/	40	ZR	18			8.5	690	340	645	241	
235	/	45	ZR	18	98W	XL	8.0	750	340	669	236	
235	/	50	ZR	18	101W	XL	7.5	825	340	693	245	
245	/	40	ZR	18	97W	XL	8.5	730	340	653	248	
245	/	45	ZR	18	100W	XL	8.0	800	340	677	243	
255	/	35	ZR	18	94Y	XL	9.0	670	340	635	260	
255	/	40	ZR	18	99Y	XL	9.0	775	340	661	260	
255	/	45	ZR	18	103W	XL	8.5	875	340	687	255	
265	/	35	ZR	18	97Y	XL	9.5	730	340	643	271	
225	/	35	ZR	19	88Y	XL	8.0	560	340	641	230	
235	/	35	ZR	19	91W	XL	8.5	615	340	647	241	
235	/	45	ZR	19	99Y	XL	8.0	775	340	695	236	
245	/	35	ZR	19	93W	XL	8.5	650	340	655	248	
245	/	40	ZR	19	98Y	XL	8.5	750	340	679	248	
245	/	45	ZR	19	102Y	XL	8.0	850	340	703	243	
255	/	35	ZR	19	96Y	XL	9.0	710	340	661	260	
225	/	35	ZR	20	90W	XL	8.0	600	340	666	230	
235	/	35	ZR	20	92W	XL	8.5	630	340	672	241	
245	/	35	ZR	20	95W	XL	8.5	690	340	680	248	
245	/	40	ZR	20	99Y	XL	8.5	775	340	704	248	
245	/	45	ZR	20	103Y	XL	8.0	875	340	728	243	
255	/	35	ZR	20	97W	XL	9.0	730	340	686	260	



K3000

35/40/45/50/55

K3000 is a sport and comfortable high performance tire specially developed for medium and high class cars. Strong Grip and control give you an accurate driving experience. Lower Noise, lower rolling resistance, enjoy the comfortable life of people and cars.




Increase the ground ratio of the tire, optimize the profile and structure of the tire, make the ground ratio of the tire bigger, provide more powerful grip;



multi-pitch design, improve drainage performance and wetland grip, effectively reduce noise during driving;



Silencer design, disrupt the pattern groove high-speed airflow, reduce the noise caused by the pumping effect, to provide you with a more quiet space.

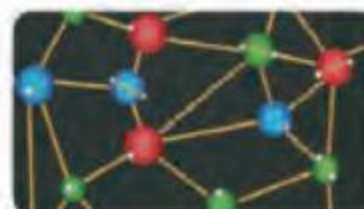

Low heat generation support rubber formula, the tire after the support to continue driving.



Asymmetric pattern, outside reinforcement design, effectively inhibit the vehicle turning or braking deformation, turning to provide more powerful support, excellent dry handling performance and braking performance;



Performance visualization

dry -----

wet -----

athletic -----

comfortable -----

Mute -----

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
195	/	45	R	16	84V	XL	6.5	500	340	582	195	
195	/	50	R	16	88V	XL	6.0	560	340	602	201	
195	/	55	R	16	91V	XL	6.0	615	340	620	201	
205	/	45	ZR	16	87W	XL	7.0	545	340	590	206	
205	/	55	ZR	16	94W	XL	6.5	670	340	632	214	
215	/	55	ZR	16	97W	XL	7.0	730	340	642	226	
205	/	40	ZR	17	84W	XL	7.5	500	340	596	212	
205	/	45	ZR	17	88W	XL	7.0	560	340	616	206	
205	/	50	ZR	17	93W	XL	6.5	650	340	638	214	
215	/	45	ZR	17	91W	XL	7.0	615	340	626	213	
215	/	50	ZR	17	95W	XL	7.0	690	340	648	226	
215	/	55	ZR	17	98W	XL	7.0	750	340	668	226	
225	/	45	ZR	17	94W	XL	7.5	670	340	634	225	
225	/	50	ZR	17	98W	XL	7.0	750	340	658	233	
225	/	55	ZR	17	101W	XL	7.0	825	340	680	233	
235	/	45	ZR	17	97W	XL	8.0	730	340	644	236	
225	/	40	ZR	18	92W	XL	8.0	630	340	637	230	
225	/	45	ZR	18	95W	XL	7.5	690	340	659	225	
225	/	50	ZR	18	99W	XL	7.0	775	340	683	233	
235	/	40	ZR	18	95W	XL	8.5	690	340	645	241	
235	/	45	ZR	18	98W	XL	8.0	750	340	669	236	
245	/	45	ZR	18	100W	XL	8.0	800	340	677	243	
255	/	40	ZR	18	99Y	XL	9.0	775	340	661	260	
265	/	35	ZR	18	97Y	XL	9.5	730	340	643	271	
235	/	45	ZR	19	99Y	XL	8.0	775	340	695	236	
235	/	50	ZR	19	103W	XL	7.5	875	340	719	245	
235	/	55	ZR	19	105W	XL	7.5	925	340	741	245	
245	/	40	ZR	19	98Y	XL	8.5	750	340	679	248	
245	/	45	ZR	19	102Y	XL	8.0	850	340	703	243	
245	/	50	ZR	19	105W	XL	7.5	925	340	729	253	
255	/	45	ZR	19	104W	XL	8.5	900	340	713	255	
255	/	50	ZR	19	107W	XL	8.0	975	340	739	265	
275	/	35	ZR	19	100Y	XL	9.5	800	340	675	278	
275	/	40	ZR	19	105W	XL	9.5	925	340	703	278	
245	/	40	ZR	20	99Y	XL	8.5	775	340	704	248	
245	/	45	ZR	20	103Y	XL	8.0	875	340	728	243	
275	/	40	ZR	20	106W	XL	9.5	950	340	728	278	
315	/	35	ZR	20	110Y	XL	11.0	1060	340	728	320	
275	/	40	ZR	21	107Y	XL	9.5	975	340	753	278	
315	/	35	ZR	21	111Y	XL	11.0	1090	340	753	320	
195	/	55	RF	16	91V	XL	6.0	615	340	620	201	



H202

45/50/55/60/65/70

H202 is specially designed for private car users. The reasonable pattern pitch arrangement and special block design make it have extraordinary silence and excellent wet and dry grip. Its silicon-containing special formula reduces the rolling resistance coefficient, which is more environmentally friendly and fuel efficient. The optimized structural design improves the comfort of the tires and allows you to enjoy a beautiful car life!



Balanced comprehensive performance: mute, fuel saving, safety and comfort



The special tread contour and optimized cross-sectional contour design improve the handling stability and the comfort of the tire.



Optimized pattern pitch and sound absorption groove design of the shoulders bring excellent silent feeling to driving;



Excellent fuel-saving ability of silicon-containing formula, economical and money-saving.



Comfortable Fuel-efficient Silent Safety

Performance visualization

Dry land -----
wet land -----
comfortable -----
silent -----
mileage -----

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
145	/	70	R	12	69T		4.5	325	300	509	150	
155	/	70	R	12	73T		4.5	365	300	523	157	
165	/	70	R	12	77T		5.0	412	300	537	170	
155	/	70	R	13	75T		4.5	387	300	548	157	
165	/	65	R	13	77T		5.0	412	300	544	170	
165	/	70	R	13	79T		5.0	437	300	562	170	
165	/	70	R	13	83T	XL	5.0	487	340	562	170	
175	/	70	R	13	82T		5.0	475	300	576	177	
185	/	70	R	13	86T		5.5	530	300	590	189	
155	/	65	R	14	75T		4.5	387	300	558	157	
165	/	60	R	14	75T		5.0	387	300	554	170	
165	/	65	R	14	79H		5.0	437	300	570	170	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	86T	XL	5.0	530	300	584	177	
175	/	70	R	14	84H		5.0	500	300	602	177	
185	/	60	R	14	82H		5.5	475	300	578	189	
185	/	65	R	14	86H		5.5	530	300	596	189	
195	/	60	R	14	86H		6.0	530	300	590	201	
205	/	60	R	14	88H		6.0	560	300	602	209	
205	/	70	R	14	95H		6.0	690	300	644	209	
215	/	70	R	14	96H		6.5	710	300	658	221	
165	/	55	R	15	75H		5.0	387	300	563	170	
175	/	55	R	15	77H		5.5	412	300	573	182	
175	/	60	R	15	81H		5.0	462	300	591	177	
175	/	65	R	15	84H		5.0	500	300	609	177	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	55	R	15	85V		6.0	515	300	595	201	
195	/	60	R	15	88V		6.0	560	300	615	201	
195	/	65	R	15	95H	XL	6.0	690	340	635	201	
205	/	60	R	15	91V		6.0	615	300	627	209	
205	/	65	R	15	94H		6.0	670	300	647	209	
215	/	60	R	15	94V		6.5	670	300	639	221	
215	/	65	R	15	96V		6.5	710	300	661	221	
195	/	60	R	16	89H		6.0	580	300	640	201	
205	/	45	R	16	87V	XL	6.0	545	340	590	206	
205	/	55	R	16	91V		6.5	615	300	632	214	
205	/	60	R	16	96H	XL	6.0	710	340	652	209	
205	/	65	R	16	95H		6.0	690	300	672	209	
215	/	60	R	16	99H	XL	6.5	775	340	664	221	
215	/	65	R	16	98H		6.5	750	300	686	221	
225	/	60	R	16	98H		6.5	750	300	676	228	
225	/	70	R	16	103T		6.5	875	300	722	228	
215	/	60	R	17	96H		6.5	710	300	690	221	
225	/	65	R	17	102H		6.5	850	300	724	228	
225	/	60	R	18	100H		6.5	800	300	727	228	



K737

45/50/55/60/65/70/80

K737 is a kind of tyre designed with silencing block + multi pitch arrangement pattern. It reduces the driving noise, improves the comfort, and creates a passenger car tire with safety and comfort as the core for private car owners.



Lightweight tire design. Application of new materials such as super high strength steel wire and single wound bead steel wire, lightweight tire products improve comfort and reduce rolling resistance.




Multi pitch pattern design with optimized pitch arrangement, effectively reduce noise and improve driving feeling.



Three central ribs ensure stability in straight driving, and asymmetrical pattern design brings better handling.



The silencing block design can disturb the high-speed air flow in the groove, reduce the noise caused by the pump effect, and make it more quiet and comfortable.



High content of white carbon black and SSBR are used for tread, make the tyre get better wet braking performance and lower rolling resistance. More safety and energy conservation.




Noisy reduction



fuel-efficient and environmental protection

Performance visualization

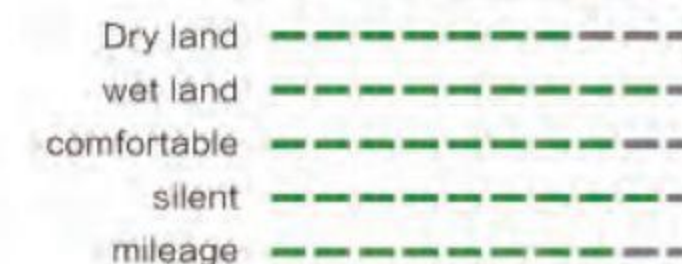

Application of advanced materials, light weight, fuel-efficient.

Multi pitch pattern design, effectively cut off air flow and reduce noise.

Using noise elimination block in groove, make more silent and comfortable.



Comfortable Fuel-efficient Silent Safety

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							Inch	kg	kPa	mm	mm	
165	/	70	R	13	79T		5.0	437	300	562	170	
175	/	70	R	13	82T		5.0	475	300	576	177	
165	/	65	R	13	77T		5.0	412	300	544	170	
185	/	70	R	13	86T		5.5	530	300	590	189	
155	/	65	R	14	75T		4.5	387	300	558	157	
165	/	60	R	14	75H		5.0	387	300	554	170	
165	/	65	R	14	79H		5.0	437	300	570	170	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	82H		5.0	475	300	584	177	
175	/	70	R	14	84H		5.0	500	300	602	177	
185	/	60	R	14	82H		5.5	475	300	578	189	
185	/	65	R	14	86H		5.5	530	300	596	189	
185	/	70	R	14	88H		5.5	560	300	616	189	
195	/	60	R	14	86H		6.0	530	300	590	201	
195	/	70	R	14	91H		6.0	615	300	630	201	
175	/	65	R	15	84H		5.0	500	300	609	177	
185	/	55	R	15	82V		6.0	475	300	585	194	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	50	R	15	82V		6.0	475	300	577	201	
195	/	55	R	15	85V		6.0	515	300	595	201	
195	/	60	R	15	88V		6.0	560	300	615	201	
195	/	65	R	15	91V		6.0	615	300	635	201	
205	/	65	R	15	94V		6.0	670	300	647	209	
205	/	55	R	16	91V		6.5	615	300	632	214	
205	/	60	R	16	92V		6.0	630	300	652	209	
215	/	60	R	16	99H	XL	6.5	775	340	664	221	
215	/	65	R	16	98H		6.5	750	300	686	221	
215	/	60	R	17	96H		6.5	710	300	690	221	



S801

55/60/65/70

S801 is designed especially for successful people. The advanced asymmetrical tread design brings super silence, excellent grip in wet and dry conditions, handling, and uncommon driving experiences. The silica compound delivers reduced rolling resistance for better fuel efficiency. Sizes from 13" to 17" meet your different demand.




Balanced performance: Stability, Silence, Security, Mileage



Asymmetrical tread design provides excellent grip and handling.



Strong block tread design improves mileage, stability, and security.

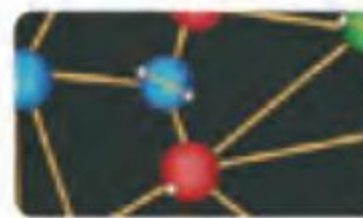

Silica compound delivers reduced rolling resistance for better fuel efficiency.



Comfortable



Fuel-efficient



Silent



Safety

Performance visualization



Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
165	/	60	R	14	75T		5.0	387	300	554	170	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	82H		5.0	475	300	584	177	
175	/	70	R	14	84H		5.0	500	300	602	177	
185	/	60	R	14	82H		5.5	475	300	578	189	
185	/	65	R	14	86H		5.5	530	300	596	189	
185	/	70	R	14	88H		5.5	560	300	616	189	
195	/	60	R	14	86H		6.0	530	300	590	201	
195	/	70	R	14	91T		6.0	615	300	630	201	
195	/	70	R	14	91H		6.0	615	300	630	201	
195	/	70	R	14	95T	XL	6.0	690	340	630	201	
185	/	55	R	15	82V		6.0	475	300	585	194	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	60	R	15	88H	XL	5.5	560	340	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
185	/	65	R	15	92H	XL	5.5	630	340	621	189	
195	/	50	R	15	82V		6.0	475	300	577	201	
195	/	55	R	15	85V		6.0	515	300	595	201	
195	/	60	R	15	88V		6.0	560	300	615	201	
195	/	65	R	15	91V		6.0	615	300	635	201	
195	/	65	R	15	95H	XL	6.0	690	340	635	201	
205	/	65	R	15	94V		6.0	670	300	647	209	
215	/	65	R	15	96H		6.5	710	300	661	221	
215	/	65	R	15	100H	XL	6.5	800	340	661	221	
205	/	50	R	16	87V		6.5	545	300	612	214	
205	/	55	R	16	91V		6.5	615	300	632	214	
205	/	60	R	16	92V		6.0	630	300	652	209	
205	/	60	R	16	96H	XL	6.0	710	340	652	209	
215	/	60	R	16	95V		6.5	690	300	664	221	
215	/	60	R	16	99H	XL	6.5	775	340	664	221	
215	/	65	R	16	98H		6.5	750	300	686	221	
225	/	55	R	16	95V		7.0	690	300	654	233	
225	/	60	R	16	98H		6.5	750	300	676	228	
225	/	60	R	17	99H		6.5	775	300	702	228	
225	/	65	R	17	102H		6.5	850	300	724	228	



A4
45/55/60/65/70

A4 all Season product with marvelous overall performance.



A newly optimized profile design provides a comfortable ride all season.



Uses an all new asymmetric tread design to accommodate all season climate with excellent handling and steering performance in wet conditions.



Diverse and irregular pitch order decreases vibrations emitted from the tire to reduce noise.



Usage of functional ALL-silicon materials brings excellent handling capabilities in snowy and wet conditions.



Comfortable



Fuel-efficient



Silent



Safety

Performance visualization

Dry land -----
wet land -----
comfortable -----
silent -----
mileage -----

Size				LI&SS		Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
225	/	45	R	17	94V	XL	7.5	670	340	634	225
185	/	55	R	15	82H		6.0	530	300	585	194
185	/	55	R	15	86H	XL	6.0	530	340	585	194
195	/	55	R	15	85H		6.0	515	300	595	201
195	/	55	R	16	87H		6.0	545	300	620	201
205	/	55	R	16	91V		6.5	670	300	632	214
205	/	55	R	16	94V	XL	6.5	670	340	632	214
215	/	55	R	16	97V	XL	7.0	730	340	642	226
185	/	60	R	14	82H		5.5	475	300	578	189
185	/	60	R	15	88H	XL	5.5	560	340	603	189
195	/	60	R	15	88H		6.0	560	300	615	201
205	/	60	R	16	96H	XL	6.0	710	340	652	209
155	/	65	R	14	75T		4.5	387	300	558	157
165	/	65	R	14	79T		5.0	437	300	570	170
175	/	65	R	14	82T		5.0	530	300	584	177
175	/	65	R	14	86T	XL	5.0	530	340	584	177
185	/	65	R	14	86T		5.5	530	300	596	189
185	/	65	R	15	88H		5.5	560	300	621	189
195	/	65	R	15	91H		6.0	690	300	635	201
195	/	65	R	15	95H	XL	6.0	690	340	635	201
165	/	70	R	13	79T		5.0	437	300	562	170
165	/	70	R	14	81T		5.0	515	300	588	170
165	/	70	R	14	85T	XL	5.0	515	340	588	170
175	/	70	R	13	82T		5.0	475	300	576	177
175	/	70	R	14	88T	XL	5.0	560	340	602	177



S3000

35/40/45/55

S3000 is a drift tyre that pursues high-speed driving control and enjoys endless fun of driving on the street and track




It adopts the new unique filler and the special tread formula of multi-functional materials to quickly reach the hot-melt temperature, soften the hardness of the tread, generate viscosity, provide great grip when driving and braking, and prevent sideslip when turning;




The cross support design makes the rigidity of the center tire shoulder most moderate distribution, improves the grounding when turning, and ensures the drainage performance;



The enhanced sidewall design can prevent the bulge or damage when the tire collides with the edge of the track. When the tire accelerates, brakes or turns at high speed, it can bear strong longitudinal tension and centrifugal force;

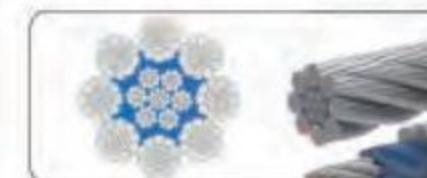

The tire adopts aramid, super strong steel wire and special sidewall rubber to improve tire rigidity, reduce tire roll when cornering and ensure good handling;

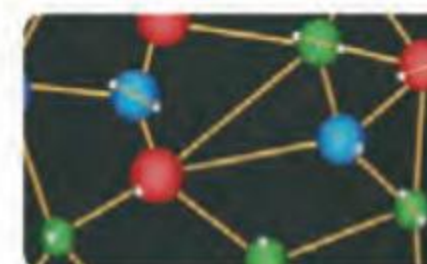


The specific formula design is applicable to comprehensive track, dry track and wet track respectively, with tread hardness of 45-88, providing excellent grip and low hardness wear resistance under various extreme conditions;

Ultra grip performance

by adopting the newly developed racing tread rubber 2R



Draining Braking Handling Grip performance

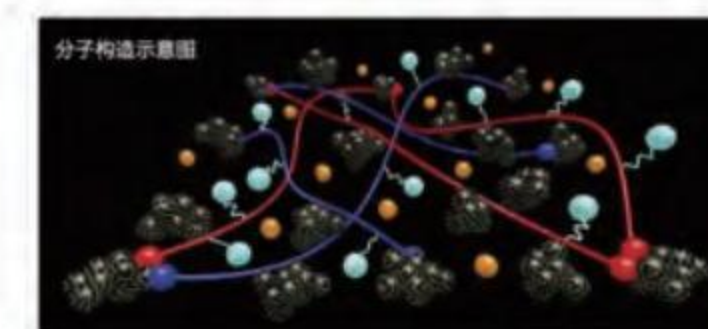

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
235	/	40	R	18	95W	XL	8.5	690	340	645	241	
265	/	35	R	18	97W	XL	9.5	730	340	643	271	
255	/	35	ZR	18	94Y	XL	9.0	670	340	635	260	
225	/	40	ZR	18	92W	XL	8.0	630	340	637	230	
225	/	45	ZR	18	95W	XL	7.5	690	340	659	225	
215	/	45	ZR	17	91W	XL	7.0	615	340	626	213	
235	/	45	ZR	17	97W	XL	8.0	730	340	644	236	
205	/	55	ZR	16	94W	XL	6.5	670	340	632	214	



H206

60/65/70



H206 is designed with noise reduction block + multi-pitch arrangement pattern, which reduces driving noise and improves comfort. It is a passenger car tire for private car owners with safety and comfort at the core.



Balanced comprehensive performance: silent, safe, comfortable and fuel efficient;



Silencer block design, disturbs the high-speed air flow in the groove, reduces the noise caused by the pumping effect, and is more quiet and comfortable;



Variable pitch pattern design, combined with optimized pitch arrangement, can effectively reduce noise during driving and improve driving quality;



Lightweight tire design, the application of new materials such as ultra-high-strength steel wire and single wound bead wire, lightweight tire products, improving comfort and reducing roll resistance;



Quiet and comfortable



Comfortable



Fuel-efficient



Silent



Safety

Performance visualization



Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
175	/	70	R	14	84H		5.0	500	300	602	177	
185	/	60	R	14	82H		5.5	475	300	578	189	
185	/	65	R	14	86H		5.5	530	300	596	189	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	60	R	15	88V		6.0	560	300	615	201	
195	/	65	R	15	91V		6.0	615	300	635	201	
205	/	65	R	15	94V		6.0	670	300	647	209	



RS21 50/55/60/65/70/75

RS21 is specially designed for the king who constantly pursues sports extremes and enjoys the ultimate driving experience. With its excellent high-speed driving ability, excellent wet and dry road handling performance, and the introduction of safe, environmentally friendly design concepts, consistent and stable performance, it is worthy of your full trust!




The four main grooves cooperate with the horizontal grooves to provide excellent drainage performance and ensure the safety of driving in heavy rain.



Rigid and uniform block design, combined with the continuous central ribs, can improve the stability of the tire in straight running;



The grooved step-like design prevents stones from being trapped when driving on country roads;

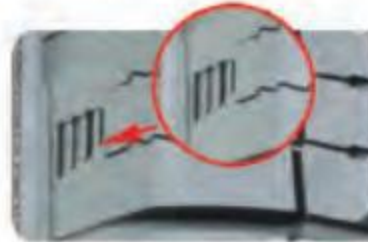

Decorative shoulder three-dimensional step design, beautiful and heat dissipation.



The design of curved fine grooves greatly reduces the water film between the road surface and the tire in rainy days, and prevents the occurrence of water sliding.




The latest formula of polybutadiene and silicon-containing technology makes the grounding area more compact; effectively improves wetland performance, reduces rolling resistance, and provides excellent handling performance.



Quiet noise reduction

3D pattern groove design, optimized combination of shoulder pattern design, providing comfortable driving experience.

Performance visualization

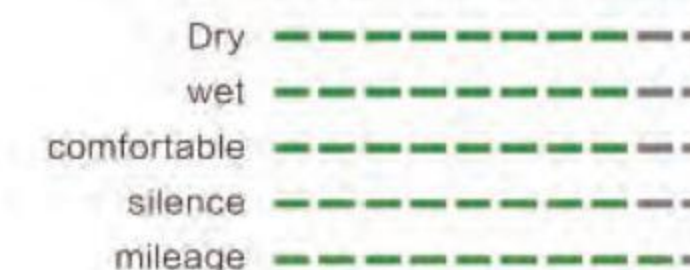

Braking



Drainage



Handling



Safety

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
235	/	75	R	15	105H		6.5	925	300	733	235	
215	/	70	R	16	100H		6.5	800	300	708	221	
225	/	70	R	16	103H		6.5	875	300	722	228	
235	/	60	R	16	100H		7.0	800	300	688	240	
235	/	70	R	16	106H		7.0	950	300	736	240	
245	/	70	R	16	111H	XL	7.0	1090	340	750	248	
255	/	70	R	16	111H		7.5	1090	300	764	260	
265	/	70	R	16	112H		8.0	1120	300	778	272	
265	/	75	R	16	116H		7.5	1250	300	804	267	
275	/	70	R	16	114H		8.0	1180	300	792	279	
215	/	50	R	17	95H	XL	7.0	690	340	648	226	
215	/	65	R	17	99H		6.5	775	300	712	221	
225	/	60	R	17	99H		6.5	775	300	702	228	
225	/	65	R	17	102H		6.5	850	300	724	228	
235	/	55	R	17	99H		7.5	775	300	690	245	
235	/	60	R	17	106H	XL	7.0	950	340	714	240	
235	/	65	R	17	108H	XL	7.0	1000	340	738	240	
245	/	65	R	17	111H	XL	7.0	1090	340	750	248	
265	/	65	R	17	112H		8.0	1120	300	776	272	
265	/	70	R	17	115H		8.0	1215	300	804	272	
225	/	60	R	18	100H		6.5	800	300	727	228	
235	/	50	R	18	101H	XL	7.5	825	340	693	245	
235	/	55	R	18	104H	XL	7.5	900	340	715	245	
235	/	60	R	18	107H	XL	7.0	975	340	739	240	
255	/	55	R	18	109V	XL	8.0	1030	340	737	265	
265	/	60	R	18	114V	XL	8.0	1180	340	775	272	



RS23

50/60/65/70/75/85

RS23 is a SUV tire suitable for all road conditions. While satisfying the performance of paved roads, it highlights the grip and sports performance of non-paved roads such as mountain roads, dirt roads and snow roads. The tiger-tooth pattern design provides powerful off-road performance for the car, and the use of a cut-resistant formula greatly improves the life of the tire pattern.



Tiger tooth-shaped three-dimensional three-dimensional block provides excellent grip performance on paved and non-paved roads.



The mixed pattern groove design guarantees the grip of mountain roads, mud and snow roads.



Special shoulder reinforcement design to prevent non-paved road from damaging the tires and bring you endless driving experience.



The irregular groove design guarantees the grip and strong off-road ability of non-paved roads.



[Tire Shoulder Scratch Resistance Design] Improves puncture resistance and scratch resistance.
[Tread Convex White Letter Design] Make the tire appearance eye-catching, beautiful and fashionable.



Drainage



Handling



Off-road



Safety

■ Performance visualization

Dry land -----
wet land -----
sport -----
comfortable -----
mileage -----

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
215	/	70	R	16	100T		6.5	800	300	708	221	
225	/	70	R	16	103T		6.5	875	300	722	228	
235	/	70	R	16	106T		7.0	950	300	736	240	
245	/	70	R	16	111T	XL	7.0	1090	340	750	248	
255	/	70	R	16	111T		7.5	1090	300	764	260	
275	/	70	R	16	114T		8.0	1180	300	792	279	
245	/	70	R	17	110S		7.0	1060	300	776	248	
255	/	65	R	17	110T		7.5	1060	300	764	260	
265	/	65	R	17	112T		8.0	1120	300	776	272	
275	/	65	R	17	119S	XL	8.0	1360	340	790	279	
285	/	65	R	17	116S		8.5	1250	300	802	292	
265	/	60	R	18	110T		8.0	1060	300	775	272	
285	/	60	R	18	116H		8.5	1250	300	799	292	
285	/	50	R	20	116Q	XL	9.0	1250	340	794	297	
31	x	10.5	R	15	109S		8.5	1030	350	775	268	
215	/	75	R	15	100/97S		6.0	800/730	350	703	216	
225	/	75	R	15	102/99S		6.0	850/775	350	719	223	
235	/	75	R	15	104/101S		6.5	900/825	350	733	235	
215	/	85	R	16	115/112S		6.0	1215/1120	550	772	216	
225	/	75	R	16	115/112S		6.0	1215/1120	550	744	223	
235	/	70	R	16	110/107S		7.0	1060/975	450	736	240	
235	/	85	R	16	120/116S		6.5	1400/1250	550	806	235	
245	/	75	R	16	120/116S		7.0	1400/1250	550	774	248	
265	/	70	R	16	117/114T		8.0	1285/1180	450	778	272	
265	/	70	R	17	121/118S		8.0	1450/1320	550	804	272	
265	/	65	R	17	120/117S		8.0	1400/1285	550	776	272	
265	/	75	R	16	123/120S		7.5	1550/1400	550	804	267	
285	/	75	R	16	126/123S		8.0	1700/1550	550	834	286	



RS26

30/35/45/50/55/60

RS26 is a top-end luxury tire specially developed for SUVs, which enables your car to have sports car-like handling, high stability and luxury car-like comfort under a variety of road conditions.



Adopting the gradual groove depth design, the pattern block is strong; the stability of the shoulder can optimize the dry grip of the tire.



Semi-closed groove design on both sides of the tread, lower noise;



The asymmetrical pattern design makes the tires have superior grip and braking performance, and better handling.



The wide pattern groove design improves drainage performance and effectively avoids tire slippage on wet roads.



■ Performance visualization


Dry land -----
wet land -----
comfortable -----
quiet -----
mileage -----

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
235	/	55	ZR	17	103W	XL	7.5	875	340	690	245	
235	/	65	R	17	108V	XL	7.0	1000	340	738	240	
215	/	55	R	18	99W	XL	7.0	775	340	693	226	
225	/	55	ZR	18	102W	XL	7.0	850	340	705	233	
235	/	50	ZR	18	101W	XL	7.5	825	340	693	245	
235	/	55	ZR	18	104W	XL	7.5	900	340	715	245	
255	/	55	R	18	109W	XL	8.0	1030	340	737	265	
255	/	60	R	18	112V	XL	7.5	1120	340	763	260	
225	/	45	R	19	96W	XL	7.5	710	340	685	225	
255	/	50	R	19	107W	XL	8.0	975	340	739	265	
255	/	55	R	19	111W	XL	8.0	1090	340	763	265	
275	/	30	ZR	19	96Y	XL	9.5	710	340	649	278	
275	/	35	ZR	19	100Y	XL	9.5	800	340	675	278	
285	/	45	R	19	111W	XL	9.5	1090	340	739	285	
235	/	45	ZR	20	100W	XL	8.0	800	340	720	236	
245	/	35	ZR	20	95W	XL	8.5	690	340	680	248	
245	/	40	ZR	20	99Y	XL	8.5	775	340	704	248	
245	/	45	ZR	20	103Y	XL	8.0	875	340	728	243	
245	/	50	ZR	20	102Y		7.5	850	300	754	253	
255	/	35	ZR	20	97W	XL	9.0	730	340	686	260	
255	/	40	ZR	20	101Y	XL	9.0	825	340	712	260	
255	/	45	ZR	20	105W	XL	8.5	925	340	738	255	
255	/	50	ZR	20	109W	XL	8.0	1030	340	764	265	
255	/	55	ZR	20	110W	XL	8.0	1060	340	788	265	
265	/	45	ZR	20	108Y	XL	9.0	1000	340	746	266	
265	/	50	R	20	111W	XL	8.5	1090	340	774	277	
275	/	30	ZR	20	97Y	XL	9.5	730	340	674	278	
275	/	35	ZR	20	102Y	XL	9.5	850	340	700	278	
275	/	40	R	20	106W	XL	9.5	950	340	728	278	
275	/	45	R	20	110W	XL	9.0	1060	340	756	273	
275	/	50	ZR	20	113W	XL	8.5	1150	340	784	284	
275	/	55	R	20	117W	XL	8.5	1285	340	810	284	
275	/	60	R	20	119V	XL	8.0	1360	340	838	279	
285	/	50	ZR	20	116W	XL	9.0	1250	340	794	297	
315	/	35	ZR	20	110Y	XL	11.0	1060	340	728	320	
265	/	40	ZR	21	105W	XL	9.5	925	340	745	271	
265	/	45	ZR	21	104W		9.0	900	300	771	266	
275	/	40	ZR	21	107Y	XL	9.5	975	340	753	278	
275	/	45	ZR	21	110W	XL	9.0	1060	340	781	273	
285	/	35	ZR	21	105Y	XL	10.0	925	340	733	290	
295	/	35	ZR	21	107Y	XL	10.5	975	340	739	301	
295	/	40	ZR	21	111Y	XL	10.5	1090	340	769	301	
325	/	30	ZR	21	108W	XL	11.5	1000	340	729	331	
275	/	40	ZR	22	107Y	XL	9.5	975	340	779	278	
285	/	35	ZR	22	106W	XL	10.0	950	340	759	290	
295	/	30	ZR	22	103W	XL	10.5	875	340	737	301	



RS25
65/70/75/85

RS25 is a SUV tire suitable for all road conditions. While satisfying the performance of paved roads, it highlights the grip and sports performance of non-paved roads such as mountain roads, dirt roads and snow roads. The tiger-tooth pattern design provides powerful off-road performance for the car, and the use of a cut-resistant formula greatly improves the life of the tire pattern.

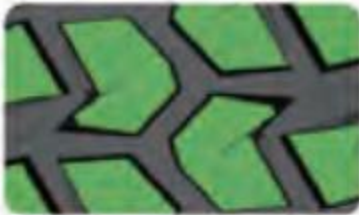

The optimized combination design of huge blocks and grooves provides excellent driving force, grip and anti-skid performance on non-paved roads;



The protective dam and rough design on the tire shoulder and the reinforced design of the tire shoulder, to improve the impact resistance of the shoulder, thus greatly improving the durability;



The double-layer reinforced belt layer and the special specification three-layer reinforced carcass design greatly improve the overall strength of the tire and catch the requirements of the worst road conditions;



Single winding hexagonal bead design, which greatly improves the durability stability of the tire bead.



[Outstanding white letter design (RWL) tyre sidewall]
Mack the tyre of eye-catching, beautiful, fashion

[Tyre shoulder friction line design]
Improved stabbing and rubbing resistance, durable wear resistance.

Triple row mud technology pattern ditch can intelligently clean residual silt.

Triple stone row technique tread pattern can row stone by itself.

Triple climbing technique tyre shoulder provides super grip.



■ Performancevisualization



Drainage



Braking



Off-road



Safety

Performance on the road	-----
performance on off-road	-----
performance in mud	-----
performance in sand	-----
performance of upslope	-----

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
31	x	10.5	R	15	109Q		8.5	1030	350	775	268	
235	/	85	R	16	120/116Q		6.5	1400/1250	550	806	235	
245	/	70	R	16	106/103Q		7.0	950/875	350	750	248	
245	/	75	R	16	120/116Q		7.0	1400/1250	550	774	248	
265	/	70	R	16	117/114Q		8.0	1285/1180	450	778	272	
245	/	65	R	17	111/108Q		7.0	1090/1000	450	750	248	
265	/	65	R	17	120/117Q		8.0	1400/1285	550	772	276	
265	/	70	R	17	121/118Q		8.0	1450/1320	550	804	272	
265	/	75	R	16	123/120Q		7.5	1550/1400	550	804	267	
285	/	75	R	16	126/123Q		8.0	1700/1550	550	834	286	



RS01

60/65/70/75

RS01 is a light truck tire for business use, which can meet the overweight test under various extremely harsh conditions. It is specially designed to improve the business operation income.



Two continuous central rib patterns provide superior wear resistance.



The design of convex surface protruding out of tread pattern block provides superior traction performance and anti sideslip performance for tire.



The design of continuous pattern block on the shoulder provides excellent driving stability and handling performance for the vehicle under high load.



Special contour design to prevent tire eccentric wear.

Wear-resisting durable

[Uniform design of grounding pressure]

Restrain shoulder deformation and shoulder wear



Performance visualization

Dry -----
Wet -----
Comfort -----
lower resistance -----
longer mileage -----

Size						LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
								inch	kg	kPa	mm	mm	
165			R	13	LT	94/93R		4.5	670/650	450	594	165	
165	/	70	R	13	C	88/86R		5.0	560/530	375	562	170	
165	/	70	R	13	LT	88/86R		5.0	560/530	375	562	170	
175	/	70	R	14	LT	95/93R		5.0	690/650	375	602	177	
175	/	65	R	14	C	90/88T		5.0	600/560	375	584	177	
175	/	65	R	14	LT	90/88T		5.0	600/560	375	584	177	
185			R	14	C	102/100R		5.5	850/800	450	650	188	
185			R	14	LT	102/100R		5.5	850/800	450	650	188	
195			R	14	LT	105/103R		5.5	925/875	450	666	198	
195			R	15	C	106/104R		5.5	950/900	450	693	196	
195			R	15	LT	106/104R		5.5	950/900	450	693	196	
195	/	70	R	15	LT	99/96R		6.0	775/710	450	655	201	
205	/	65	R	15	LT	102/100T		6.0	800/730	450	647	209	
205	/	70	R	15	LT	106/104R		6.0	950/900	450	669	209	
215	/	65	R	15	LT	104/102T		6.5	900/850	375	661	221	
215	/	70	R	15	LT	104/101R		6.5	900/825	450	683	221	
225	/	70	R	15	LT	106/103R		6.5	950/875	450	697	228	
185	/	75	R	16	LT	100/97R		5.0	800/730	450	684	184	
195	/	65	R	16	LT	99/96R		6.0	775/710	450	660	201	
195	/	75	R	16	LT	102/99R		5.5	850/775	450	698	196	
205	/	65	R	16	LT	101/98R		6.0	825/750	450	672	209	
205	/	75	R	16	LT	113/111R		5.5	1150/1090	525	714	203	
215	/	65	R	16	LT	109/107R		6.5	1030/975	475	686	221	
215	/	75	R	16	LT	112/109R		6.0	1120/1030	525	728	216	
225	/	65	R	16	LT	112/110R		6.5	1120/1060	475	698	228	
235	/	65	R	16	LT	115/113R		7.0	1215/1150	475	712	240	
195			R	14	LT	105/103R		5.5	925/875	450	666	198	



H201
55/70/75

H201 is a high-end touring tire with four seasons pattern. Its super long wearing performance has excellent dry and wet performance. With low heat formula, it can bring safety guarantee for long-distance travel. At the same time, the optimized tire




Symmetrical pattern brings low noise



Four broad grooves provide good drainage performance





Special pattern and formula design are adopted to ensure super long mileage.

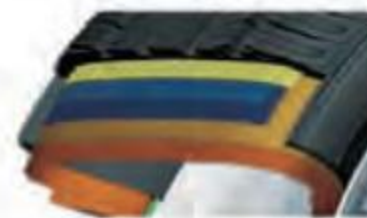

Seamless steel wire ring and crown strip ensure the uniformity of tire and improve the comfort.



The latest formula of solution polymerized styrene and silicon technology makes the grounding area closer; effectively improves wetland performance, reduces rolling resistance and provides excellent handling performance.

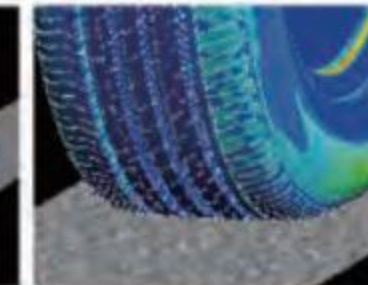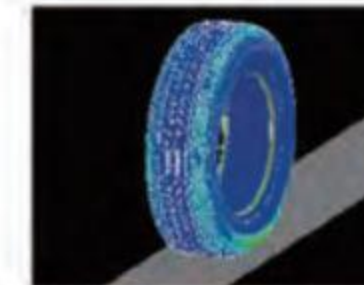

Validation of bionic technology of road noise analysis of road noise caused by tire driving on rough road, adjustment of tire structure, reduction of road noise.



Comfortable



Fuel-efficient



Silent



Safety

Performance visualization

Dry	-----
wet road	-----
sport	-----
comfort	-----
muted	-----

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
205	/	70	R	15	96T		6.0	710	300	669	209	
205	/	75	R	15	97T		5.5	730	300	689	203	
215	/	70	R	15	98T		6.5	750	300	683	221	
215	/	75	R	15	100T		6.0	800	300	703	216	
225	/	70	R	15	100T		6.5	800	300	697	228	
225	/	75	R	15	102T		6.0	850	300	719	223	
235	/	75	R	15	105T		6.5	925	300	733	235	
205	/	55	R	16	91T		6.5	615	300	632	214	



RS01

55/60/65/70

RS01 is designed for taxis. Adopt three grooves and large blocks design, especially the use of ultra-fine carbon black, which greatly improves the abrasion resistance and safety of the tire, reduces the rolling resistance of the tire, and improves operation for taxi drivers while ensuring safety income.



Two continuous central rib patterns provide superior abrasion resistance.



Hyperfine carbon ingredient improve longer mileage and safety, reducing rolling resistance. Bring security and benefit for taxi drivers.



Continuous shoulder block design provides superior driving stability and handling performance for cars under high load conditions;



Special contour design to prevent tire wear.

Wear-resisting durable

[Uniform design of grounding pressure]

Restrain shoulder deformation and shoulder wear

Longer performance life

Optimized the formula of tread rubber to strengthen the strength of tread and prevent the deformation of tread at the later stage of use



Wear



Braking



Fuel-saving



Safety

Performance visualization

Dry -----
Wet -----
Comfort -----
lower resistance -----
longer mileage -----

Size					LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
165	/	70	R	13	83T	XL	5.0	487	340	562	170	
175	/	70	R	13	82T		5.0	475	300	576	177	
185	/	70	R	13	86T		5.5	530	300	590	189	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	86T	XL	5.0	530	340	584	177	
175	/	70	R	14	84T		5.0	500	300	602	177	
185	/	60	R	14	82T		5.5	475	300	578	189	
195	/	60	R	14	86T		6.0	530	300	590	201	
185	/	65	R	15	88T		5.5	560	300	621	189	
185	/	60	R	15	84H		5.5	500	300	603	187	
195	/	60	R	15	88H		6.0	560	300	615	201	
195	/	65	R	15	91H		6.0	615	300	635	201	
205	/	65	R	15	94H		6.0	670	300	647	209	
205	/	55	R	16	91V		6.5	615	300	632	214	



RS27 is a kind of SUV and pick-up truck tire with mixed pattern designed for unique climate and environment, which can adapt to all kinds of comprehensive road conditions.




Four main zigzag grooves and transverse grooves provide excellent wet grip performance.



horizontal coarse and fine grooves cooperate with the design of the longitudinal small grooves to maximize the sediment discharge and greatly improve the grip on the sediment ground.




The design of large three-dimensional decorative steps at the shoulder of the tire provides great heat dissipation capacity, and the tire can cope with the hot and dry climate.

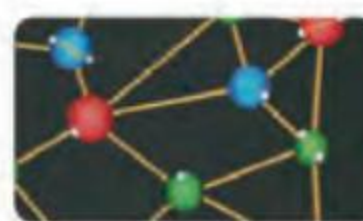

The high toughness and tear resistance formula is designed to ensure the performance of tyres in severe environment.

The design of base glue thickness strengthening

The thickness of the base rubber is strengthened to prevent the tread groove from cracking.

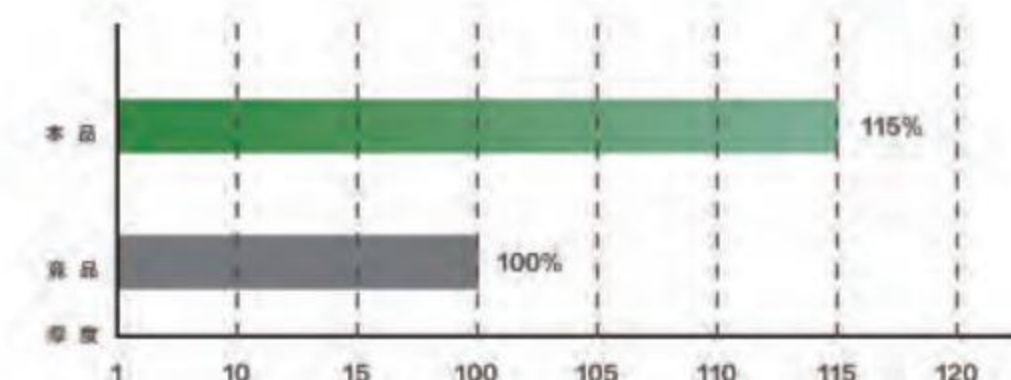

■ Performance visualization

Dry -----
Wet -----
Comfort -----
lower resistance -----
longer mileage -----

Size						LI&SS	XL	Standard Rim	Max. Load	Max. Pressure	Overall Doameter	Section Width	Notes
								inch	kg	kPa	mm	mm	
255	/	70	R	15	C	112/110S		7.5	1120/1060	375	739	260	
205			R	16	C	110/108S		6.0	1110/1000	450	736	208	
235	/	85	R	16		120/116S		6.5	1400/1250	550	806	235	
265	/	65	R	17		112H		8.0	1120	300	776	272	
285	/	65	R	17		116H		8.5	1250	300	802	292	
285	/	60	R	18		116H		8.5	1250	300	799	292	



RS03
75/80/85


RS03 is designed especially for specialty trailer. The Z shape tread blocks provide excellent traction.



4 draining grooves bring excellent drainage.



Wider tread brings extra grips and traction.

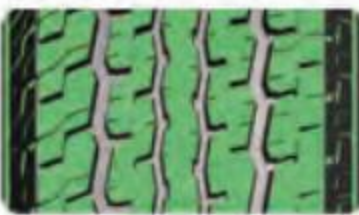

Soft central blocks and hard Z shape blocks can meet all terrains.



Thick sidewall and special wearing compound bring long mileage.



■ Performance visualization



Size						LI&SS	P.R	Standar d Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
								inch	kg	kPa	mm	mm	
ST	175	/	80	R	13	91/87M	6C	5	615/545	350	610	177	
ST	205	/	75	R	14	100/96M	6C	5.5	800/710	350	664	203	
ST	215	/	75	R	14	102/98M	6C	6	850/750	350	678	216	
ST	205	/	75	R	15	101/97M	6C	5.5	825/730	350	689	203	
ST	205	/	75	R	15	107/102M	8D	5.5	975/850	450	689	203	
ST	225	/	75	R	15	113/108M	8D	6	1150/1000	450	719	223	
ST	225	/	75	R	15	117/112M	10E	6	1285/1120	550	719	223	
ST	235	/	80	R	16	124/120M	10E	6.5	1600/1410	590	782	235	
ST	235	/	85	R	16	125/121M	10E	6.5	1650/1450	550	806	235	
ST	235	/	85	R	16	128/124M	12F	6.5	1800/1600	660	806	235	



RW501

45/50/55/60/65/70/75



Winter tyre Ice/snow road Braking Handling

RW501 is a winter tire product specially designed for the ice and snow area, so that you can enjoy the driving pleasure on the ice and snow ground and the slippery road




Four longitudinal grooves and continuous transverse grooves from the middle to the shoulder provide excellent snow discharge performance.



Optimized tread design of shoulder and small absorption holes greatly improve the grip of ice and wet road.



The 3D three-dimensional groove design with fine tread improves the grip and traction of the ice and snow ground, and improves the rigidity of the pattern block to provide excellent handling and driving performance of the ice and snow ground.

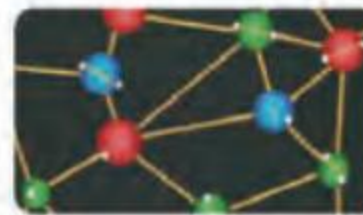

Low temperature resistant compound formula of tread has strong grip on snow and ice, improves braking performance and ensures safety.

Size					LI&SS	/XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
155	/	65	R	13	73T		4.5	365	300	532	157	
165	/	70	R	13	79T		5.0	437	300	562	170	
175	/	70	R	13	82T		5.0	475	300	576	177	
165	/	60	R	14	75T		5.0	387	300	554	170	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	82T		5.0	475	300	584	177	
175	/	70	R	14	84T		5.0	500	300	602	177	
185	/	60	R	14	82T		5.5	475	300	578	189	
185	/	65	R	14	86T		5.5	530	300	596	189	
185	/	70	R	14	88T		5.5	560	300	616	189	
195	/	60	R	14	86T		6.0	530	300	590	201	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	55	R	15	85H		6.0	515	300	595	201	
195	/	60	R	15	88H		6.0	560	300	615	201	
195	/	65	R	15	95T	XL	6.0	690	340	635	201	
205	/	65	R	15	94H		6.0	670	300	647	209	
235	/	75	R	15	109T	XL	6.5	1030	340	733	235	
195	/	60	R	16	89T		6.0	580	300	640	201	
205	/	55	R	16	91H		6.5	615	300	632	214	
205	/	60	R	16	96H	XL	6.0	710	340	652	209	
225	/	55	R	16	99H	XL	7.0	775	340	654	233	
215	/	60	R	16	99H	XL	6.5	775	340	664	221	
215	/	65	R	16	98H		6.5	750	300	686	221	
215	/	70	R	16	100T		6.5	800	300	708	221	
225	/	60	R	16	98T		6.5	750	300	676	228	
225	/	70	R	16	107T	XL	6.5	975	340	722	228	
235	/	60	R	16	100T		7.0	800	300	688	240	
235	/	70	R	16	106T		7.0	950	300	736	240	
245	/	70	R	16	107T		7.0	975	300	750	248	
215	/	50	R	17	95H	XL	7.0	690	340	648	226	
215	/	55	R	17	94H		7.0	670	300	668	226	
215	/	60	R	17	96H		6.5	710	300	690	221	
225	/	50	R	17	98H	XL	7.0	750	340	658	233	
225	/	55	R	17	101H	XL	7.0	825	340	680	233	
225	/	60	R	17	99H		6.5	775	300	702	228	
225	/	65	R	17	102T		6.5	850	300	724	228	
235	/	55	R	17	103H	XL	7.5	875	340	690	245	
235	/	65	R	17	108T	XL	7.0	1000	340	738	240	
245	/	65	R	17	111H	XL	7.0	1090	340	750	248	
215	/	55	R	18	95H		7.0	690	300	693	226	
225	/	45	R	18	91H		7.5	615	300	659	225	
225	/	55	R	18	98H		7.0	750	300	705	233	
225	/	60	R	18	104H	XL	6.5	900	340	727	228	
235	/	50	R	18	101H	XL	7.5	825	340	693	245	
235	/	55	R	18	100H		7.5	800	300	715	245	
235	/	60	R	18	107T	XL	7.0	975	340	739	240	
245	/	45	R	18	100H	XL	8.0	800	340	677	243	
245	/	60	R	18	105H		7.0	925	300	751	248	
255	/	55	R	18	105H		7.0	925	300	737	265	
265	/	60	R	18	114T	XL	8.0	1180	340	775	272	
285	/	60	R	18	120H	XL	8.5	1400	340	799	292	
245	/	55	R	19	103H		7.5	875	300	753	253	
255	/	50	R	19	107H	XL	8.0	975	340	739	265	
265	/	50	R	19	110H	XL	8.5	1060	340	749	277	
255	/	50	R	20	109H	XL	8.0	1030	340	764	265	
275	/	45	R	20	110H	XL	9.0	1060	340	756	273	
165			R	13	94/93T		4.5	670/650	450	596	167	
175			R	14	99/98T		5.0	775/730	450	634	178	
185			R	14	102/100S		5.5	850/800	450	650	188	
195	/	70	R	15	99/96Q		6	775/710	450	655	201	
205	/	70	R	15	106/104S		6.0	950/900	450	669	209	
225	/	70	R	15	106/103S		6.5	950/875	450	697	228	
215	/	70	R	15	98/95T		6.5	750/690	350	683	221	
215	/	75	R	15	100/97T		6.0	800/730	350	703	216	
235	/	75	R	15	104/101T		6.5	900/825	350	733	235	



AW11
45/50/55/60/65/70/75


AW11 is specially designed for light truck in ice and snow area of winter, it makes you enjoy the driving on the ice & snow road and slippery road.




Right-angle design on shoulder, Anti-slip, enhance driving stability.



The wide pattern block design of the tread chamfering angle can effectively prevent the tire from side-slip on the ice and snow road; the pattern block widening design of the shoulder of the tire and staggered ten-shaped arrangement can make the tire have more effective traction and braking ability in normal driving and turning.

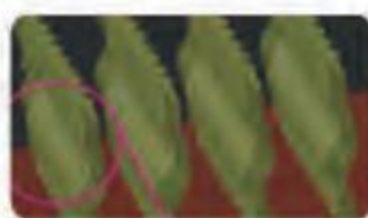

The 3D three-dimensional groove design with fine tread improves the grip and traction of the ice and snow ground, and improves the rigidity of the pattern block to provide excellent handling and driving performance of the ice and snow ground.

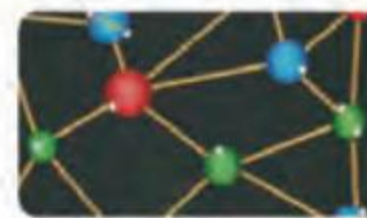

Low-temperature tread compound, perform strong grip on snow and ice, improve braking performance, ensure safety in motion.



【 Tread foaming technology 】 :

A sponge like structure with appropriate density and uniform size is formed in the tread area to absorb ice moisture.

【 Design of widened driving surface 】 :

The driving surface is 5-20mm wider than that of summer tyres, enhancing driving force and braking force.



3D groove Normal groove

【 3D groove design 】 :

The meshing effect between grooves is formed during driving, which reduces the relative movement between pattern blocks and increases the grounding area.

【 Low hardness tread formula 】 :

normal temperature: 45-50ha, - 30 ℃: about 50ha, keep the tread soft and ensure the grip.



Winter tyre



Ice/snow road



Braking



Handling

■ Performance visualization

icy -----
snowy -----
dry -----
comfort -----
mute -----

Size					LI&SS	/XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
215	/	70	R	15	98/95T		6.5	750/690	350	683	221	
215	/	75	R	15	100/97T		6.0	800/730	350	703	216	
235	/	75	R	15	104/101T		6.5	900/825	350	733	235	




AW33 is a winter tire product specially designed for the ice and snow area, so that you can enjoy the driving pleasure on the ice and snow ground and the slippery road.




More crosswise and multiple pattern grooves cross, which can fully absorb water, avoid water film, and effectively form snow pillars to improve snow discharge performance.



Unsymmetrical tread tires maintain rigidity on the outside and provide more ground area, improve the grip of dry wetland and ice surface sharp turning.

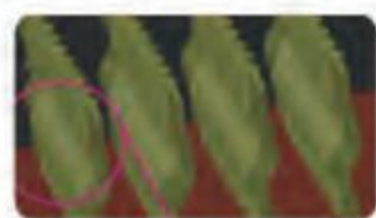

3D and ultra-thin groove design with fine tread improves the grip of ice and snow ground and ensures the handling and driving performance of ice and snow ground.

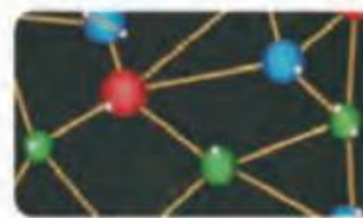

The low temperature resistant compound formula of tread has strong grip on snow and ice, and can ensure excellent handling performance.

Size					LI&SS	/XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
155	/	65	R	13	73T		4.5	365	300	512	157	
165	/	70	R	13	79T		5.0	417	300	562	170	
165	/	60	R	14	75T		5.0	387	300	554	170	
165	/	70	R	14	81T		5.0	462	300	588	170	
175	/	65	R	14	86T	XL	5.0	530	340	584	177	
175	/	70	R	14	88T	XL	5.0	560	340	602	177	
185	/	60	R	14	82T		5.5	475	300	578	189	
185	/	65	R	14	86T		5.5	530	300	596	189	
185	/	70	R	14	88T		5.5	560	300	616	189	
185	/	60	R	15	84H		5.5	500	300	603	189	
185	/	65	R	15	88H		5.5	560	300	621	189	
195	/	55	R	15	85H		6.0	515	300	595	201	
195	/	60	R	15	88H		6.0	560	300	615	201	
195	/	65	R	15	95T	XL	6.0	690	300	635	201	
205	/	65	R	15	94H		6.0	670	300	647	209	
195	/	60	R	16	89T		6.0	580	300	640	201	
205	/	55	R	16	91H		6.5	615	300	632	214	
205	/	60	R	16	96H	XL	6.0	710	340	652	209	
225	/	55	R	16	99H	XL	7.0	775	340	654	233	
215	/	60	R	16	99H	XL	6.5	775	340	664	221	
215	/	65	R	16	98H		6.5	750	300	686	221	
215	/	70	R	16	100T		6.5	800	300	708	221	
225	/	60	R	16	98T		6.5	750	300	676	228	
225	/	70	R	16	107T	XL	6.5	975	340	722	228	
235	/	60	R	16	100T		7.0	800	300	688	240	
235	/	70	R	16	106T		7.0	950	300	736	240	
245	/	70	R	16	107T		7.0	975	300	750	248	
265	/	70	R	16	112T		8.0	1120	300	778	272	
205	/	45	R	17	88H	XL	7.0	560	340	616	206	
205	/	50	R	17	93H	XL	6.5	650	340	638	214	
215	/	50	R	17	95H	XL	7.0	690	340	648	226	
215	/	55	R	17	94H		7.0	670	300	668	226	
215	/	60	R	17	96H		6.5	710	300	690	221	
225	/	45	R	17	94H	XL	7.5	670	340	634	225	
225	/	50	R	17	98H	XL	7.0	750	340	658	233	
225	/	55	R	17	101H	XL	7.0	825	340	680	233	
225	/	60	R	17	99H		6.5	775	300	702	228	
225	/	65	R	17	102T		6.5	850	300	724	228	
235	/	50	R	17	100H	XL	7.5	800	340	668	245	
235	/	55	R	17	103H	XL	7.5	875	340	690	245	
235	/	65	R	17	108T	XL	7.0	1000	340	738	240	
245	/	65	R	17	111H	XL	7.0	1090	340	750	248	
265	/	65	R	17	112T		8.0	1120	300	776	272	
265	/	65	R	17	116H	XL	8.0	1250	340	776	272	
215	/	55	R	18	95H		7.0	690	300	693	226	
225	/	40	R	18	92H	XL	8.0	630	340	637	230	
225	/	50	R	18	99H	XL	7.0	775	340	683	233	
225	/	55	R	18	98H		7.0	750	300	705	233	
225	/	60	R	18	104H	XL	6.5	900	340	727	228	
235	/	50	R	18	101H	XL	7.5	825	340	693	245	
235	/	55	R	18	100H		7.5	800	300	715	245	
235	/	60	R	18	107T	XL	7.0	975	340	739	240	
245	/	40	R	18	97H	XL	8.5	730	340	653	248	
245	/	45	R	18	100H	XL	8.0	800	340	677	243	
255	/	55	R	18	105H		8.0	925	300	737	265	
265	/	60	R	18	114T	XL	8.0	1180	340	775	272	
285	/	60	R	18	120H	XL	8.5	1400	340	799	292	
225	/	45	R	19	96H	XL	7.5	710	340	685	225	
225	/	55	R	19	99H		7.0	775	300	731	233	
235	/	45	R	19	99H	XL	8.0	775	340	695	236	
235	/	50	R	19	103H	XL	7.5	875	340	719	245	
235	/	55	R	19	105H	XL	7.5	925	340	741	245	
245	/	45	R	19	102H	XL	8.0	850	340	703	243	
245	/	50	R	19	105H	XL	7.5	925	340	729	253	
245	/	55	R	19	103H		7.5	875	300	753	253	
255	/	45	R	19	104H	XL	8.5	900	340	713	255	
255	/	50	R	19	107H	XL	8.0	975	340	739	265	
255	/	55	R	19	111H	XL	8.0	1090	340	763	265	
265	/	50	R	19	110H	XL	8.5	1060	340	749	277	
245	/	40	R	20	99H	XL	8.5	775	340	704	248	
245	/	45	R	20	103H	XL	8.0	875	340	728	243	
255	/	50	R	20	109H	XL	8.0	1030	340	764	265	
265	/	50	R	20	111H	XL	8.5	1090	340	774	277	
275	/	40	R	20	106H	XL	9.5	950	340	728	278	
275	/	45	R	20	110H	XL	9.0	1060	340	756	273	
315	/	35	R	20	110H	XL	11.0	1060	340	728	320	
205	/	55	RF	16	91H		6.5	615	300	632	214	
205	/	45	RF	17	88H	XL	7.0	560	340	616	206	
205	/	50	RF	17	93H	XL	6.5	650	340	638	214	
225	/	45	RF	17	94H	XL	7.5	670	340	634	225	
225	/	50	RF	17	98H	XL	7.0	750	340	658	233	
225	/	55	RF	17	101H	XL	7.0	825	340	680	233	
225	/	40	RF	18	92H	XL	8.0	630	340	637	230	
225	/	50	RF	18	99H	XL	7.0	775	340	683	233	
235	/	50	RF	18	101H	XL	7.5	825	340	693	245	
245	/	40	RF	18	97H	XL	8.5	730	340	653	248	
245	/	45	RF	18	100H	XL	8.0	800	340	677	243	
255	/	55	RF	18	105H		8.0	925	300	737	265	
235	/	45	RF	19	99H	XL	8.0	775	340	695	236	
235	/	50	RF	19	103H	XL	7.5	875	340	719	245	
235	/	55	RF	19	105H	XL	7.5	925	340	741	245	
245	/	45	RF	19	102H	XL	8.0	850	340	703	243	
245	/	50	RF	19	105H	XL	7.5	925	340	729	253	
255	/	50	RF	19	107H	XL	8.0	975	340	739	265	
275	/	40	RF	20	106H	XL	9.5	950	340	728	278	
315	/	35	RF	20	110H	XL	11.0	1060	340	728	320	



RW506

40/45/50/55/60/65/70

RW506 is designed especially for extremely cold weather. Studdable design can bring safe driving on ice road.



Directivity studs configuration provides excellent grips and guidance, guaranteeing traction and breaking



Directional design brings efficient drainage.



Special stud technique brings both grips and comfortable driving.



Detailed sipes enlarge the ground contact area, draining water fast and improving grps.



■ Performance visualization

icy -----
snowy -----
dry -----
comfort -----
mute -----

Size					LI&SS	/XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
175	/	70	R	13	82T		5.0	475	300	576	177	
175	/	65	R	14	86T	XL	5.0	530	340	584	177	
175	/	70	R	14	88T	XL	5.0	560	340	602	177	
185	/	65	R	14	90T	XL	5.5	600	340	596	189	
185	/	70	R	14	92T	XL	5.5	630	340	616	189	
185	/	60	R	15	88T	XL	5.5	560	340	603	189	
185	/	65	R	15	92T	XL	5.5	630	340	621	189	
195	/	60	R	15	92T	XL	6.0	630	340	615	201	
195	/	65	R	15	95T	XL	6.0	690	340	635	201	
205	/	65	R	15	99T	XL	6.0	775	340	647	209	
205	/	70	R	15	100T	XL	6.0	800	340	669	209	
205	/	55	R	16	94T	XL	6.5	670	340	632	214	
205	/	60	R	16	96T	XL	6.0	710	340	652	209	
215	/	60	R	16	99T	XL	6.5	775	340	664	221	
215	/	65	R	16	102T	XL	6.5	850	340	686	221	
225	/	60	R	16	102T	XL	6.5	850	340	676	228	
215	/	55	R	17	98H	XL	7.0	750	340	668	226	
225	/	45	R	17	94H	XL	7.5	670	340	634	225	
225	/	50	R	17	98H	XL	7.0	750	340	658	233	
225	/	55	R	17	101H	XL	7.0	825	340	680	233	
235	/	55	R	17	103T	XL	7.5	875	340	690	245	
225	/	40	R	18	92H	XL	8.0	630	340	637	230	
245	/	45	R	18	100H	XL	8.0	800	340	677	243	
215	/	70	R	16	100T		6.5	800	300	708	221	
235	/	70	R	16	106T		7.0	950	300	736	240	
245	/	70	R	16	111T	XL	7.0	1090	340	750	248	
265	/	70	R	16	112T		8.0	1120	300	778	272	
225	/	65	R	17	106T	XL	6.5	950	340	724	228	
235	/	65	R	17	108T	XL	7.0	1000	340	738	240	
245	/	65	R	17	111T	XL	7.0	1090	340	750	248	
265	/	65	R	17	112T		8.0	1120	300	776	272	
235	/	60	R	18	107T	XL	7.0	975	340	739	240	
255	/	55	R	18	109T	XL	8.0	1030	340	737	265	



RW505

40/45/50/55


RW505 is high performance winter tyres. The asymmetrical design and excellent grips bring safe driving in winter condition.



Continuous grooves from central to shoulder, bring excellent draining and safety.



Asymmetrical design provide excellent grips, breaking and handling.

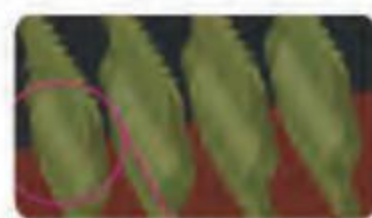

Detailed 3D sipes prevent sliding, improve breaking and handling in high speed condition.



Improved shoulder blocks bring excellent stability.



【 Tread foaming technology 】 :

A sponge like structure with appropriate density and uniform size is formed in the tread area to absorb ice moisture.

【 Design of widened driving surface 】 :

The driving surface is 5-20mm wider than that of summer tyres, enhancing driving force and braking force.



3D groove Normal groove

【 3D groove design 】 :

The meshing effect between grooves is formed during driving, which reduces the relative movement between pattern blocks and increases the grounding area.

【 Low hardness tread formula 】 :

normal temperature: 45-50ha, - 30 ℃: about 50ha, keep the tread soft and ensure the grip.



Winter tyre



Ice/snow road



Braking




Handling

■ Performance visualization

icy -----
snowy -----
dry -----
comfort -----
mute -----

Size					LI&SS	/XL	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width	Notes
							inch	kg	kPa	mm	mm	
195	/	55	R	16	87H		6.0	545	300	620	201	
205	/	55	R	16	91V		6.5	615	300	632	214	
215	/	55	R	16	97V	XL	7.0	730	340	642	226	
225	/	55	R	16	99V	XL	7.0	775	340	654	233	
205	/	45	R	17	88V	XL	7.0	560	340	616	206	
205	/	50	R	17	93V	XL	6.5	650	340	638	214	
215	/	45	R	17	91V	XL	7.0	615	340	626	213	
215	/	50	R	17	95V	XL	7.0	690	340	648	226	
215	/	55	R	17	98V	XL	7.0	750	340	668	226	
225	/	45	R	17	94V	XL	7.5	670	340	634	225	
225	/	50	R	17	98V	XL	7.0	750	340	658	233	
225	/	55	R	17	101V	XL	7.0	825	340	680	233	
235	/	45	R	17	97V	XL	8.0	730	340	644	236	
225	/	40	R	18	92V	XL	8.0	530	340	637	230	
255	/	55	R	18	109V	XL	8.0	1030	340	737	265	







- Improving Stability

- Improving Handling

- Improving Breaking

Different sizes with same overall diameter



Size	Inch Up Size
215/55R16	225/50R16
	235/50R16
	245/50R16
	245/45R16
	215/50R17
	225/50R17
	235/45R17
	245/45R17
	255/40R17
	255/40R17
	235/40R18
245/40R18	
225/55R16	245/45R17
195/50R15	205/45R16
205/50R15	215/45R16
205/50R16	225/45R16
	245/45R16
215/50R16	245/45R16
	225/45R17
	235/40R17
	245/40R17
	255/40R17
225/50R16	245/45R16
	235/45R17
	255/40R17
215/50R17	235/45R17
	245/45R17
	245/40R17
	255/40R17
	235/40R18
	245/40R18




ROAD		LONG HAUL & REGIONAL	ON-OFF ROAD	OFF ROAD
POSITION				
		   	           	
ALL POSITION				
 		       	   	
STEER/TRAILER				
		      	         	          
DRIVE				
		        		
TRAILER				



- Optimized tread rubber formula can improve wear resistance;
- The application of particle reinforced materials and high resilience technology can reduce the extrusion friction heat generation between polymer chains, so as to reduce the heat generation, reduce energy loss and achieve low rolling resistance and oil saving efficiency;
- Even grounding technology can prevent anti-eccentric wear and reduce invalid wear.
- Application of international advanced dynamic balance technology to prevent tire vibration and discomfort at high speed.

- Good fuel and energy saving performance.
- Good dynamic balance performance, anti-eating and anti-eccentric wear.

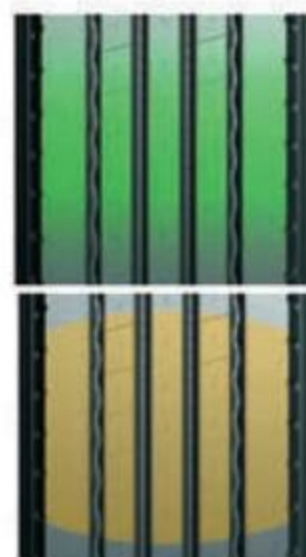

501

Apply Available Disable




SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12R22.5	18	9.00	152/149M	1084	300	3550/3250	930
315/80R22.5	20	9.00	157/153L	1076	312	4125/3650	860



- Beautiful appearance pattern, special tread-line details, improve the grip on wet road, safe, comfortable and fuel saving.
- The design of four longitudinal straight ditches has excellent guiding performance, drainage performance and anti sliding performance.
- The high wear-resistant tread formula and four-layer belt layer design can completely improve the driving range in an all-round way; the widened shoulder can help to reduce the wear speed.
- Apply the international advanced dynamic balance technology to prevent the tire from shaking and uncomfortable at high speed.

- Good fuel and energy saving performance.
- Good dynamic balance performance, anti-eating and anti-eccentric wear.

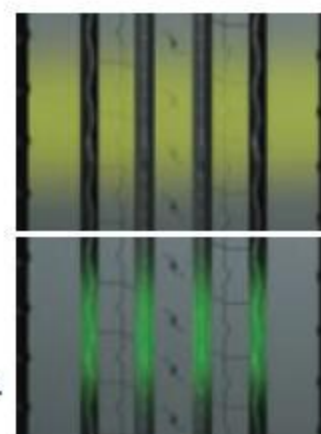

502

Apply Available Disable




SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
7.50R16LT	14	6.00G	122/118L	805	215	1500/1320	770
8R22.5	14	6.00	130/128M	935	170	1900/1800	830
9R22.5	14	6.75	136/134M	974	185	2240/2120	830
10R22.5	16	7.50	144/142L	1019	200	2800/2650	900
11R22.5	16	9.25	146/143M	1054	279	3000/2725	830
275/80R22.5	18	8.25	149/146K	1012	276	3250/3000	900
295/80R22.5	18	9.00	152/149M	1044	298	3550/3250	900
315/80R22.5	20	9.00	157/153L	1076	312	4125/3650	860



- Hybrid pattern and special super wear-resistant formula combined technology application can have excellent cutting resistance and block resistance when used on bad roads, and excellent wear resistance when used on pavement road.
- The design of the folded line V-shaped large-angle groove and the use of boulders can prevent the damage to the bottom of the groove and the belt caused by the stone which can cause early damage to the tire
- Stepped shoulders and pattern design can not only play a role in heat dissipation, but also prevent partial wear.

- Good fuel and energy saving performance.
- Good dynamic balance performance, resistance to partial wear.

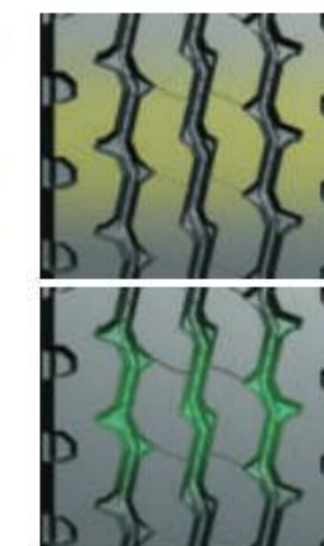

509

Apply Available Disable




SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11R22.5	16	8.25	146/143K	1054	279	3000/2725	830
12R22.5	18	9.00	152/149M	1084	300	3550/3250	930
13R22.5	18	9.75	154/151K	1124	320	3750/3450	850
295/80R22.5	18	9.00	152/149L	1044	298	3550/3250	900
315/80R22.5	20	9.00	157/153L	1076	312	4125/3650	860



- The design of four longitudinal straight grooves has excellent guiding and drainage performance; lateral grooves and small steel grooves enhance the tire's grip and anti-skid performance
- Uniform grounding technology prevents partial wear and reduces ineffective wear
- The use of stone-removing structure can effectively protect the base of the tread, prevent stone inclusion, improve the puncture resistance of the crown, protect the carcass, reduce the failure rate, and extend the service life of the tire.
- Apply international advanced dynamic balance technology to prevent tire shaking at high speed.

- Low rolling resistance, good fuel and energy saving performance.
- Good dynamic balance performance, resistance to partial wear.

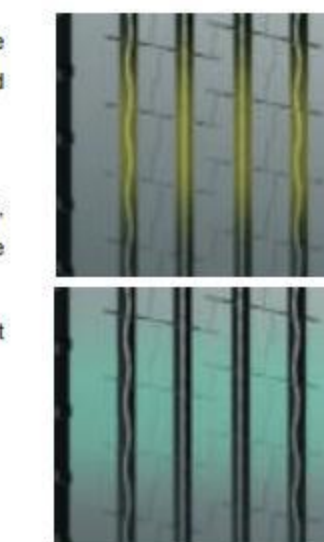

506

Apply Available Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12R22.5	18	9.00	152/149L	1085	300	3550/3250	930



S16

- Adopting a zigzag Z-shaped longitudinal groove in the middle and vertical straight hooks on both sides of the design to provide tire driving force while increasing the handling performance of the tire, so that the tire can be used in all wheel positions.
- Optimized application of super abrasion resistance formula makes this pattern have super high mileage and super cost-effective.

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
315/80R22.5	20	9.00	157/153L	1076	312	4125/3750	860



H517

- All position pattern, Design for short distance, low speed and heavy load dumper trucks at port, construction plant, mining area and woodland.
- Special tread pattern design and wide-angle bring better endurance performance.
- Big blocking pattern design and special anti-puncture formula, providing excellent cut resistance, wear resistance and traction performance.
- Circular arc design at the bottom of groove, in avoid of groove crack and better for water and mud discharge.

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11R22.5	16	8.25	146/143K	1054	279	3000/2725	830
11R24.5	16	8.25	149/146F	1104	279	3250/3000	830
12R22.5	18	9.00	152/149F	1085	300	3550/3250	930
295/80R22.5	18	9.00	152/149M	1044	298	3550/3250	900
12.00R20	20	8.50	156/153K	1125	315	4000/3650	900



H5278

- The design of three tortuous V-shaped large-angle grooves makes it have good maneuverability.
- High abrasion resistance, tear-resistant formula used, can be used on pavement roads with high abrasion resistance performance, and has excellent cutting resistance when used on poor roads.
- Large stepped shoulder pattern design can not only play a role in heat dissipation, but also prevent partial wear.

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
315/80R22.5	20	9.00	157/153L	1076	312	4125/3750	860



H5298

- Pattern characteristic:**
Super abrasion resistance, excellent heat dissipation performance, good handling and traction, with higher original mileage, Excellent fuel efficiency.
- Suitable conditions:**
Suitable for all wheel position, medium/long-haul vehicles, running on mixed pavements.

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
9.00R20	16	7.00	144/142K	1018	260	2800/2650	900
10.00R20	18	7.50	149/146K	1049	276	3250/3000	930
11.00R20	18	8.00	152/149K	1085	293	3550/3250	930
12.00R20	20	8.50	156/153K	1125	315	4000/3650	900
12R22.5	18	9.00	152/149M	1082	289	3550/3250	930



Pattern characteristic:

Suitable for medium/long-haul vehicles Running on high-grade road,excellent load capacity,straight shallow grooves offers an excellent drive, straight ride and anti-sidewall scuffing performance.

Suitable conditions:

Suitable for steer/trailer position,Running on the nation highway and high way.

H5201

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
315/70R22.5	20	9.00	154/150M	1015	330	3750/3350	900



Pattern characteristic:

Specially recipe design provides tear resistance, high wear resistance, and excellent load capacity,Low rolling resistance & noise emission,excellent heat radiation,guiding stability. Excellent fuel efficiency.

Suitable conditions:

Suitable for steer/trailer position of bus and truck running on high-grade road.

H5101

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11R22.5	16	8.25	146/143M	1054	279	3000/2725	830
12R22.5	18	9.00	152/149M	1085	289	3550/3250	930
295/80R22.5	18	9.00	152/149M	1044	298	3550/3250	900
315/80R22.5	20	9.00	157/153L	1076	310	4125/3650	860



Pattern characteristic:

Low heat generating,excellent high speed driving character,good handling quality.

Suitable conditions:

Suitable for steer/trailer position.Steer and trailer wheel, suitable for high way and good quality road use.

H5109

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
315/80R22.5	20	9.00	157/153L	1069	310	4125/3650	860



Pattern characteristic:

Four straight groove can provide excellent braking and driving performances.

Suitable conditions:

Suitable for steering wheel,trailer wheel,medium/long-haul vehicles,Running on good pavements.

H5258

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11.00R20	18	8.00	152/149K	1085	293	3550/3250	930



Pattern characteristic:

4 straight groove can provide superior braking and driving performances,superior adhesion properties of the ground, excellent wet skid resistance,excellent wear resistance.

Suitable conditions:

steer and trailer tyre,medium/long-haul vehicles,running on high-grade road.

H5259

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11.00R20	18	8.00	152/149K	1085	293	3550/3250	930



Pattern characteristic:

Four straight groove can provide excellent braking and driving performances.

Suitable conditions:

Suitable for steering wheel,trailer wheel,medium/long-haul vehicles,Running on good pavements.

H5303

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
295/80R22.5	18	9.00	152/149M	1042	298	3550/3250	900



Pattern characteristic:

Mixed pattern design provide strong traction and breaking power. Longer block pattern design enhance the ability of anti eccentric wear and the abnormal wear. Five deep grooves, multi blocks & tiny kerfs.

Suitable conditions:

Suitable for driving wheel position, no suitable for steer position of short/middle distance trucks running on good road condition.

H5102

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
315/80R22.5	20	9.00	157/153L	1082	310	4125/3650	860



Pattern characteristic:

TMS technology and special compound for smooth tread wear. Special pattern design provides good anti eccentric wear. Block tread.

Suitable conditions:

Suitable for driving wheel position of middle/long distance trucks running on good road condition.

H5103

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11R22.5	16	8.25	146/143M	1065	279	3000/2725	830
12R22.5	18	9.00	152/149M	1096	289	3550/3250	930
295/80R22.5	18	9.00	152/149M	1050	298	3550/3250	900



Pattern characteristic:

Specially recipe design provides wear-resistance, low heat generation, Excellent traction and draining performance, more original mileage. Mix pattern supplies excellent traction performance, braking performance, super driving and anti-wet ability.

Suitable conditions:

Suitable for driving position, medium/long-haul vehicles, running on high-grade road.

H5107

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12R22.5	18	9.00	152/149M	1092	289	3550/3250	930
13R22.5	18	9.75	154/151L	1124	320	3750/3450	850



Pattern characteristic:

Mixed pattern design provide strong traction and breaking power. Longer block pattern design enhance the ability of anti eccentric wear and the abnormal wear. Five deep grooves, multi blocks & tiny kerfs on the blocks assure a firm grip and a powerful tr

Suitable conditions:

Suitable for driving wheel position on good road condition.

H5202

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
295/80R22.5	18	9.00	152/149M	1044	298	3550/3250	900
315/70R22.5	20	9.00	154/150M	1025	330	3750/3350	900



Pattern characteristic:

Suitable for highway and good quality road condition drive wheel, trailer wheel suitable for common or poor road surface, such as country road with anti-crack character, good abrasion resistance, anti-puncture character, excellent traction performance and loading character deepened & widened pattern of groove design, increase the traveled range and improve the adaptability to bad roads steering wheel, trailer wheel.

Suitable conditions:

Suitable for driving position of buses and light trucks running on Highway and roads of common grades.

H5207

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11R22.5	16	8.25	146/143M	1054	279	3000/2725	830
11R24.5	16	8.25	149/146M	1110	277	3250/3000	830



Pattern characteristic:

Widen tread width design provides excellent driving and gripping power. Extra deep tread provides an extra powerful traction and a long tread life. Closed shoulder maintains a good irregular wear resistance. With excellent crack and tear resistance character.

Suitable conditions:

Suitable for Light, heavy duty and bus driving position on good road.

H5208

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11R22.5	16	8.25	146/143M	1057	279	3000/2725	830
11R24.5	16	8.25	149/146M	1108	277	3250/3000	830
285/75R24.5	16	8.25	147/144L	1055	285	3075/2800	830
295/75R22.5	16	9.00	146/143L	1016	302	3000/2725	830



Pattern characteristic:

Excellent load capacity and Super abrasion resistance, tear resistance, high wear resistance, suitable to vehicles on low grade road and medium/long-haul vehicles.

Suitable conditions:

Drive position. High-grade road.

H5716

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11.00R20	18	8.00	152/149K	1082	293	3550/3250	930
12R22.5	18	9.00	152/149M	1085	289	3550/3250	930



Pattern characteristic:

High wear resistance, High cost performance.

Suitable conditions:

Suitable for trailer position of buses and light trucks running on Highway.

H5206

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
7.50R16LT	14	6.00G	122/118L	801	216	1500/1320	770
9.5R17.5	18	6.75	143/141M	845	241	2725/2575	930



Pattern characteristic:

Reinforced belt and body construction enhance the loading ability. Special tread compound for high resistance against tread cut.

Suitable conditions:

Suitable for all position on good road condition and non-paved roads.

H518

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12.00R24	20	8.50	160/157K	1226	313	4500/4125	900



Pattern characteristic:

Improved tread design, High wear resistance and eccentric wear resistance. Low rolling resistance, Save fuel consumption, good handling quality.

Suitable conditions:

Steer/trailer tyre suitable for Long-distance transportation, running on high-grade road.

H5205

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11R22.5	16	8.25	146/143M	1054	279	3000/2725	830
11R24.5	16	8.25	149/146M	1098	277	3250/3000	830
205/75R17.5	16	6.00	124/122M	750	213	1600/1500	750
215/75R17.5	16	6.00	126/124M	759	214	1700/1600	700
225/70R19.5	16	6.75	128/126M	812	230	1800/1700	760
235/75R17.5	16	6.75	132/130M	790	232	2000/1900	775
245/70R19.5	16	7.50	136/134M	835	252	2180/2060	830
255/70R22.5	16	7.50	140/137M	931	260	2500/2300	830
265/70R19.5	16	7.50	140/138M	862	266	2500/2360	775
275/70R22.5	16	8.25	148/145M	958	280	3150/2900	900
285/75R24.5	16	8.25	147/144L	1055	285	3075/2800	830
295/75R22.5	16	9.00	146/143L	1008	302	3000/2725	830



Pattern characteristic:

High wear resistance, High cost performance. Excellent anti-side-skid character and good drainage character, good handling quality.

Suitable conditions:

Suitable for steer/trailer position of buses and light trucks running on Highway.

H5219

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11R22.5	14	8.25	144/142M	1037	279	2800/2650	720
11R24.5	16	8.25	149/146M	1088	277	3000/2725	720
285/75R24.5	14	8.25	144/141L	1034	285	2800/2575	760
295/75R22.5	14	9.00	144/141L	998	304	2800/2575	760



Pattern characteristic:

Super abrasion resistance, excellent heat dissipation performance, good handling and traction, with higher original mileage, Excellent fuel efficiency.

Suitable conditions:

Suitable for all wheel position, medium/long-haul vehicles, running on mixed pavements.

H5166

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
385/65R22.5	20	11.75	160K	1072	389	4500	900



Pattern characteristic:

Excellent traction and draining performance, more original mileage.

Suitable conditions:

trailer tyre of bus and truck, not suitable for drive and steer wheel position running on well-paved roads and mixed pavements and medium/long-haul vehicles.

H5106

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
385/65R22.5	20	11.75	160K	1072	389	4500	900



Pattern characteristic:


Super abrasion resistance, excellent heat dissipation performance, good handling and traction, with higher original mileage, Excellent fuel efficiency.

Suitable conditions:

Suitable for all wheel position, medium/long-haul vehicles, running on mixed pavements.

H5209

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
385/65R22.5	20	11.75	160K	1072	389	4500	900



Pattern characteristic:

3 continuous ribs, and the circumferential grooves enhance superior adhesion properties of the ground, excellent wet skid resistance, special tread design, providing a low heating up, wear resistance.

Suitable conditions:

Suitable for all wheel position, running on high way, running on mixed pavements, the national highway.

H5216

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12.00R24	20	8.50	160/157K	1226	313	4500/4125	900



Pattern characteristic:

Block tread pattern provides excellent gripping and traction power. Tough belt construction for smooth wear and longer mileage. Special tread compound for high resistance against tread cut.

Suitable conditions:

Suitable for all position of trucks running on non-paved roads.

H5218K

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12.00R24	20	8.50	160/157K	1226	313	4500/4125	900



Pattern characteristic:

Block tread pattern provides excellent gripping and traction power. Tough belt construction for smooth wear and longer mileage. Special tread compound for high resistance against tread cut.

Suitable conditions:

Suitable for all position of trucks running on non-paved roads.

H5218

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
9.00R20	16	7.00	144/142K	1015	259	2800/2650	900
10.00R20	18	7.50	149/146K	1045	278	3250/3000	930
11.00R20	18	8.00	152/149K	1085	293	3550/3250	930
12.00R20	20	8.50	156/153K	1125	315	4000/3650	900



Pattern characteristic:

Super abrasion resistance, excellent heat dissipation performance, good handling and traction, with higher original mileage, Excellent fuel efficiency.

Suitable conditions:

Suitable for all wheel position, medium/long-haul vehicles, running on mixed pavements.

● Apply ● Available ● Disable



H5268

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
6.50R16LT	12	5.50F	110/105L	750	185	1060/925	670
7.00R16LT	14	5.50F	118/114L	775	200	1320/1180	770
7.50R16LT	14	6.00G	122/118L	805	215	1500/1320	770
8.25R16LT	16	6.50H	128/124L	855	235	1800/1600	770
8.25R20	16	6.50	139/137K	974	236	2430/2300	930
9.00R20	16	7.00	144/142K	1018	259	2800/2650	900
10.00R20	18	7.50	149/146K	1049	278	3250/3000	930
11.00R20	18	8.00	152/149K	1085	293	3550/3250	930
12.00R20	20	8.50	156/153K	1125	315	4000/3650	900
12.00R24	20	8.50	160/157K	1210	315	4500/4125	900
11R22.5	16	8.25	146/143M	1056	279	3000/2725	830
11R24.5	16	8.25	149/146M	1100	277	3250/3000	830
12R22.5	18	9.00	152/149M	1084	289	3550/3250	930
13R22.5	18	9.75	154/151L	1124	320	3750/3450	850
295/80R22.5	18	9.00	152/149M	1042	298	3550/3250	900
315/80R22.5	20	9.00	157/153L	1076	310	4125/3650	860



Pattern characteristic:

Longer mileage by adoption of new cap tread compound specially developed for long haul condition. Optimised groove angle with anti-zigzag design for stone rejection ability & groove crack prevention. Super high tensile is used for increased stiffness, Innovative belt package designed and enhanced bead to reduce heat and increase durability.

Suitable conditions:

Suitable for driving wheel position on good road condition and non-paved roads.

● Apply ● Available ● Disable



KM220

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
325/95R24	22	9.00	162/160K	1228	325	4750/4500	850



Pattern characteristic:

Reinforced belt and body construction enhance the loading ability. Special tread compound for high resistance against tread cut.

Suitable conditions:

Suitable for driving wheel position on good road condition and non-paved roads.

● Apply ● Available ● Disable



H5108

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12.00R24	20	8.50	160/157K	1226	313	4500/4125	900



Pattern characteristic:

Reinforced belt and body construction enhance the loading ability. Special tread compound for high resistance against tread cut.

Suitable conditions:

Suitable for driving wheel position on good road condition and non-paved roads.

● Apply ● Available ● Disable



H5217

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11R22.5	16	8.25	146/143M	1068	279	3000/2725	830
11R24.5	16	8.25	149/146M	1120	277	3250/3000	830



Pattern characteristic:

Reinforced belt and body construction enhance the loading ability. Special tread compound for high resistance against tread cut.

Suitable conditions:

Suitable for driving wheel position on good road condition and non-paved roads.

● Apply ● Available ● Disable



H5228

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12.00R24	20	8.50	160/157K	1226	313	4500/4125	900



Pattern characteristic:

Big deep block provide strong traction and braking power. Open groove and bottom design given excellent self-cleaning performance Reinforced bead and body to strengthen the puncture resistance, tear resistance.

Suitable conditions:

Suitable for driving wheel position on good road condition and non-paved roads.

● Apply ● Available ● Disable



H5918

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
7.00R16LT	14	5.50F	118/114L	775	200	1320/1180	770
7.50R16LT	14	6.00G	122/118L	805	215	1500/1320	770
8.25R16LT	16	6.50L	128/124K	855	235	1800/1600	770
8.25R20	16	6.50	139/137K	972	236	2430/2300	930
11.00R20	18	8.00	152/149K	1096	293	3550/3250	930
12.00R20	20	8.50	156/153K	1136	315	4000/3650	900
12.00R24	20	8.50	160/157K	1226	315	4500/4125	900



Pattern characteristic:

Block tread pattern provides excellent gripping and traction power. Tough belt construction for smooth wear and longer mileage. Special tread compound for high resistance against tread cut.

Suitable conditions:

Suitable for driving position of trucks running on non-paved roads.

● Apply ● Available ● Disable



H5928

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
9.5R17.5	18	6.75	143/141M	844	240.5	2725/2575	930
215/75R17.5	16	6.00	126/124M	770	214	1700/1600	700
235/75R17.5	16	6.75	132/130M	789	232	2000/1900	775
315/80R22.5	20	9.00	157/153L	1081	310	4125/3650	860



Pattern characteristic:

Super abrasion resistance, excellent heat dissipation performance, good handling and traction, with higher original mileage, Excellent fuel efficiency.

Suitable conditions:

Suitable for all wheel position, medium/long-haul vehicles, running on mixed pavements.

● Apply ● Available ● Disable



H5238

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12R22.5	18	9.00	152/149M	1082	289	3550/3250	930



Pattern characteristic:

Tough belt construction, with high wear resistance and good impact force, Reinforced bead provide good traction.

Suitable conditions:

Suitable for driving wheel position of short/middle distance trucks on various of non-paved road.

● Apply ● Available ● Disable



H5918+

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
9.00R20	16	7.00	144/142K	1018	260	2800/2650	900
10.00R20	18	7.50	149/146K	1053	278	3250/3000	930



Pattern characteristic:

Big deep block provide strong traction and braking power. Open groove and bottom design given excellent self-cleaning performance Reinforced bead and body to strengthen the puncture resistance, tear resistance.

Suitable conditions:

Suitable for driving wheel position for short mileage vehicles running on various of non-paved roads.

● Apply ● Available ● Disable



H5938+

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11.00R20	18	8.00	152/149K	1087	293	3550/3250	930
12.00R20	20	8.50	156/153K	1124	315	4000/3650	900



Pattern characteristic:

Big deep block provide strong traction and braking power. Open groove and bottom design given excellent self-cleaning performance Reinforced bead and body to strengthen the puncture resistance, tear resistance.

Suitable conditions:

Suitable for driving wheel position for short mileage vehicles running on various of non-paved roads.

● Apply ● Available ● Disable



H5968+

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11.00R20	18	8.00	152/149K	1087	293	3550/3250	930
12.00R20	20	8.50	156/153K	1125	315	4000/3650	900



Pattern characteristic:

Big deep block provide strong traction and braking power. Open groove and bottom design given excellent self-cleaning performance Reinforced bead and body to strengthen the puncture resistance, tear resistance.

Suitable conditions:

Suitable for driving wheel position for short mileage vehicles running on various of non-paved roads.

● Apply ● Available ● Disable



H5978

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
10.00R20	18	7.50	149/146K	1053	278	3250/3000	930



Pattern characteristic:

Super abrasion resistance, excellent heat dissipation performance, good handling and traction, with higher original mileage, Excellent fuel efficiency.

Suitable conditions:

Suitable for drive wheel position, use for mining/mountain road, medium/long-haul vehicles, running on mixed pavements.

● Apply ● Available ● Disable



H5203

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
13R22.5	18	9.75	154/151L	1133	320	3750/3450	850
295/80R22.5	18	9.00	152/149M	1044	298	3550/3250	900
315/80R22.5	20	9.00	157/153L	1082	312	4125/3650	860



Pattern characteristic:

Transverse big block type and deepened pattern design, provides superior driving performance. The open type groove design has a good self-cleaning ability. In particular, the strength of reinforced carcass design, provide greater carrying capacity. In par.

Suitable conditions:

Overload, bad road short haul dump truck driving wheel or all wheel position. The construction site, mines, mud and other serious adverse road conditions.

● Apply ● Available ● Disable



H5715

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
9.00R20	16	7.00	144/142K	1034	260	2800/2650	900
10.00R20	18	7.50	149/146K	1060	278	3250/3000	930
11.00R20	18	8.00	152/149K	1096	293	3550/3250	930
12.00R20	20	8.50	156/153K	1136	315	4000/3650	900



Pattern characteristic:

Big deep block provide strong traction and braking power. Open groove and bottom design given excellent self-cleaning performance Reinforced bead and body to strengthen the puncture resistance, tear resistance.

Suitable conditions:

Suitable for driving wheel position for short mileage vehicles running on various of non-paved roads.

● Apply ● Available ● Disable



H5105

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12R22.5	18	9.00	152/149M	1079	289	3550/3250	930
13R22.5	18	9.75	154/151L	1130	320	3750/3450	850



Pattern characteristic:

Super abrasion resistance, excellent heat dissipation performance, good handling and traction, with higher original mileage, Excellent fuel efficiency.

Suitable conditions:

Suitable for all wheel position, medium/long-haul vehicles, running on mixed pavements.

● Apply ● Available ● Disable



AT577

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11.00R20	18	8.00	152/149K	1085	293	3550/3250	930



Pattern characteristic:

All weather pattern design, with excellent traction performance. Reinforced bead ring design, with better resistance to overload. To strengthen the body and high impact resistance belt design, can be repeated use of refurbished tires.

Suitable conditions:

Short haul trucks, dump truck, mixer truck, tractor driving wheel. National highway, urban and rural areas, construction sites and other mixed roads.

● Apply ● Available ● Disable



AT578

SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11.00R20	18	8.00	152/149K	1085	288	3550/3250	930
12.00R20	20	8.50	156/153K	1125	315	4000/3650	900



Pattern characteristic:

Improved tread design, High wear resistance and eccentric wear resistance. Low rolling resistance, Save fuel consumption, good handling quality.

Suitable conditions:

Suitable for steer or all wheel position of bus and truck running on high-grade road.

FT566

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12R22.5	18	9.00	152/149M	1084	289	3550/3250	930



Pattern characteristic:

Super skeleton material super ring structure, nylon reinforcement layer and shoulder image optimization. Integrate technology to improve heavy load capacity. The falling horizontal ditch adopts stones, and the longitudinal ditch is strengthened to prevent the damage of stones to the ditch bottom. The use of special ultra-low heat generation and tear resistance formula can inhibit heat accumulation and lead to early void under heavy load conditions. It has excellent low anti cutting block performance when used on poor roads.

Suitable conditions:

Mixed pavement, unpaved pavement.

AR588

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12.00R20	20	8.50	156/153K	1126	310	4000/3650	900



Pattern characteristic:

All weather pattern design, with excellent traction performance. Reinforced bead ring design, with better resistance to overload. To strengthen the body and high impact resistance belt design, can be repeated use of refurbished tires.

Suitable conditions:

Short haul trucks, dump truck, mixer truck, tractor driving wheel. National highway, urban and rural areas, construction sites and other mixed roads.

H5978+

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11.00R20	18	8.00	152/149K	1085	288	3550/3250	930
12.00R20	20	8.50	156/153K	1125	315	4000/3650	900



Pattern characteristic:

Transverse pattern as the main body of the middle of the reinforcement design, special formula design, resistant to thorn, not easy to block. Carcass and carcass ply steel special coating designed to strengthen the capacity of giving the tire stronger. The open pattern ditch and the pattern ditch prevent the stone to embed the design, the tire has the extremely good self - clean.

Suitable conditions:

Truck drive tyre, use for Mining/Mountain road.

FT520

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
7.00R16LT	14	5.50F	118/114F	779	196	1320/1180	770
7.50R16LT	16	6.00G	124/120F	815	216	1650/1450	770
8.25R16LT	16	6.50H	128/124F	854	230	1800/1600	770
8.25R20	16	6.50	139/137F	975	237	2430/2300	930
9.00R20	16	7.00	144/142F	1027	260	2800/2650	900
10.00R20	18	7.50	149/146F	1057	276	3250/3000	930



Pattern characteristic:

Special designed mine pattern tyre for harsh road ,with wide tyre crown and deep tread, which could provide higher mileage. The large lateral pattern block can produce the driving forces, maintaining excellent grip performance both in the dry and wet pavement.

Suitable conditions:

Heavy load, mining area, sand gravel pavement.

FT530

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
7.00R16LT	14	5.50F	118/114F	781	196	1320/1180	770
7.50R16LT	16	6.00G	124/120F	818	216	1650/1450	770
8.25R16LT	16	6.50H	128/124F	863	230	1800/1600	770
8.25R20	16	6.50	139/137F	981	237	2430/2300	930
9.00R20	16	7.00	144/142F	1035	260	2800/2650	900
10.00R20	18	7.50	149/146F	1065	276	3250/3000	930



Pattern characteristic:

Special designed mine pattern tyre for harsh road ,with wide tyre crown and deep tread, which could provide higher mileage.The large lateral pattern block can produce the driving forces, maintaining excellent grip performance both in the dry and wet pavem.

Suitable conditions:

Mine dedicated, low speed, heavy load.

H5758

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12.00R20	22	8.50	158/155D	1130	305	4250/3875	1000



Pattern characteristic:

Transverse pattern as the main body of the middle of the reinforcement design, special formula design, resistant to thorn, not easy to block. Carcass and carcass ply steel special coating designed to strengthen the capacity of giving the tire stronger. The open pattern ditch and the pattern ditch prevent the stone to embed the design, the tire has the extremely good self - clean.

Suitable conditions:

Mining special tires, applicable to in mines, construction sites, such as gravel mining area, site of short self unloading, mixing car driving wheel.

H5765+

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
7.50R16LT	14	6.00G	122/118L	814	216	1500/1320	770
8.25R16LT	16	6.50H	128/124K	854	230	1800/1600	770
8.25R20	16	6.50	139/137K	974	236	2430/2300	930
9.00R20	16	7.00	144/142K	1028	260	2800/2650	900
10.00R20	18	7.50	149/146K	1057	276	3250/3000	930
11.00R20	18	8.00	152/149K	1095	293	3550/3250	930
12.00R20	20	8.50	156/153K	1125	315	4000/3650	900



Pattern characteristic:

Special designed mine pattern tyre for harsh road ,with wide tyre crown and deep tread, which could provide higher mileage.The large lateral pattern block can produce the driving forces, maintaining excellent grip performance both in the dry and wet pavem.

Suitable conditions:

Mine dedicated, low speed, heavy load.

H5779

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
12.00R20	22	8.50	158/155D	1130	305	4250/3875	1000



Pattern characteristic:

Special designed mine pattern tyre for harsh road ,with wide tyre crown and deep tread, which could provide higher mileage.The large lateral pattern block can produce the driving forces, maintaining excellent grip performance both in the dry and wet pavem.

Suitable conditions:

Truck drive tyre, use for Mining/Mountain road.

H5755+

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11.00R20	18	8.00	152/149K	1100	288	3550/3250	930
12.00R20	20	8.50	156/153K	1125	315	4000/3650	900



Pattern characteristic:

Unique belt structure, with high wear-resistance and low producing heat crown formulation. Has a strong grip and wet-slip resistance performance. Optimized and enhanced bead design, especially for special conditions. Radial structure of the carcass, ma.

Suitable conditions:

Truck drive tyre, suitable for low speed ride on bad or common road, such as mine road, mountain road.

H5801Q

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
10.00R20	18	7.50	149/146K	1055	278	3250/3000	930
11.00R20	18	8.00	152/149K	1096	293	3550/3250	930
12.00R20	20	8.50	156/153K	1136	315	4000/3650	900
13R22.5	18	9.75	154/151L	1124	320	3750/3450	850



Pattern characteristic:

Big deep block provide strong traction and braking power. Open groove and bottom design given excellent self-cleaning performance Reinforced bead and body to strengthen the puncture resistance, tear resistance.

Suitable conditions:

Suitable for driving wheel position for short mileage vehicles running on various of non-paved roads.

K0775

● Apply ● Available ● Disable



SIZE	PR	STANDARD RIM	LOAD INDEX & SPEED RATING	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	MAX LOAD(KG) SINGLE/DUAL	MAX PRESSURE (KPA)
11R22.5	16	8.25	146/143F	1054	279	3000/2725	830
11R24.5	16	8.25	149/146K	1104	279	3250/3000	830
12R22.5	18	9.00	152/149F	1085	300	3550/3250	930



SIZE	PATTERN
6.50R16-12PR	 H5268 P16
7.00R16-14PR	 H5918 P18  H5268 P16  FT520 P23  FT530 P23
7.50R16-14PR	 H5206 P12  H5268 P16  H5918 P18  S02 P4  H5765+P24  FT520 P23  FT530 P23
8.25R16-16PR	 H5268 P16  H5918 P18  H5765+P24  FT520 P23  FT530 P23
8.25R20-16PR	 H5918 P18  H5765+P24  H5268 P16  FT520 P23  FT530 P23
9.00R20-16PR	 H5298 P21  H5218  H5268 P16  H5715 P20  H5918+ P19  H5765+P24  FT520 P23  FT530 P23
10.00R20-18PR	 H5298 P07  H5218 P15  H5268 P16  H5715 P20  H58010 P25  H5918+ P19  H5978 P20  FT520 P23  FT530 P23

SIZE	PATTERN
11.00R20-18PR	 H5298 P07  H5218 P15  H5258 P09  H5259 P09  H5268 P16  H5715 P20  H5716 P12  H5765+ P24  AT577 P21  H5755+ P25  H58010 P25  H5918 P18  H5938+ P19  H5968+ P19  H5978+ P22  AT578+P21
12.00R20-20PR	 H5758 P24  H5298 P07  H5218 P15  H5268 P16  AT578+P21  H5755+ P25  H58010 P25  H5918 P18  H5938+ P19  H5715 P20  H5968+ P19  H517 P06  H5978+P22  H5765+ P24  AR588 P22  H5779 P24
12.00R24-20PR	 H5108 P17  H518 P12  H5216 P15  H5218K P15  H5228 P17  H5268 P16  H5918 P18
9.5R17.5-18PR	 H5206 P12  H5928 P18



SIZE	PATTERN
13R22.5-18PR	
295/80R22.5-18PR	
215/75R17.5-16PR 235/75R17.5-16PR	
205/75R17.5-16PR 225/70R19.5-14PR 245/70R19.5-16PR 255/70R22.5-16PR 265/70R19.5-16PR 275/70R22.5-16PR	
315/70R22.5-20PR	
12R22.5-18PR	

SIZE	PATTERN
315/80R22.5-20PR	
325/95R24-22PR	
385/65R22.5-20PR	
11R22.5-16PR	
11R24.5-16PR	
285/75R24.5-16PR 295/75R22.5-16PR	