
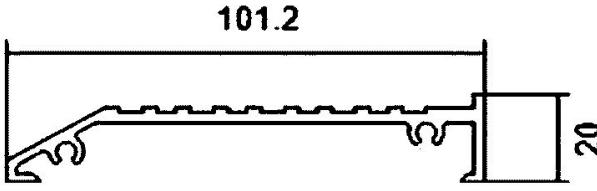
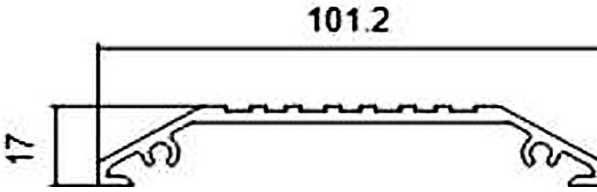
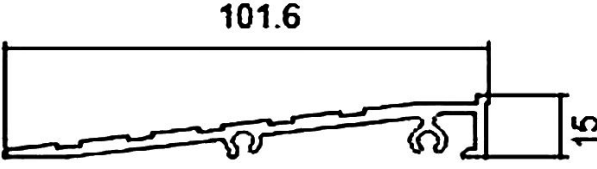
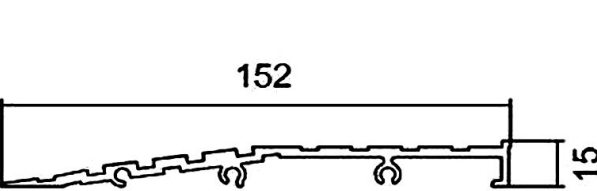


Accessible Threshold

Name	Dimensions	Profile
Low Threshold 14788	101.20 x 20.00 mm (6.5m Lengths, Cut to size)	
Double-Sided Threshold 14787	101.20 x 17.00 mm (6.5m Lengths, Cut to size)	
100 mm Wheelchair Threshold 14769	101.60 x 15.00 mm (6.5m Lengths, Cut to size)	
152 mm Wheelchair Threshold 14920	152.00 x 15.00 mm (6.5m Lengths, Cut to size)	

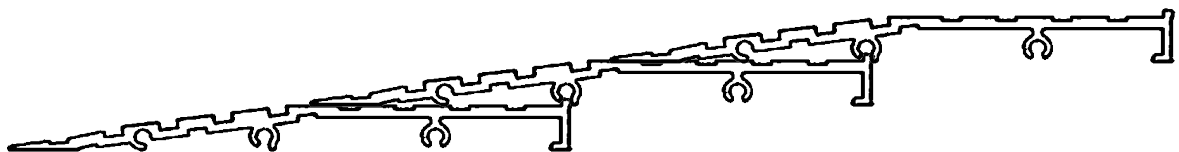

Our 100 and 150 mm Thresholds can be screwed in succession to provide longer ramps while remaining compliant.

Note: Images are not to scale



Alucom | Security Doors & Screens
156 Gladstone Street, Fyshwick | alucom.com.au | 02 6280 7465



Accessible Threshold

Key Requirements of AS 1428.1:2021

- **Doors:** Doorways must have a minimum clear opening width of 850 mm when the door is open at 90 degrees.
- **Ramps:** Ramps must have a minimum clear width of 1000 mm between handrails. The maximum slope (gradient) for general use is 1:14. Landings are required at the top and bottom of each ramp and at intervals no greater than 9 meters.
- **Circulation Spaces:** A circulation space of at least 1500 mm by 1500 mm is mandated whenever a wheelchair user must make a 30° to 90° turn.

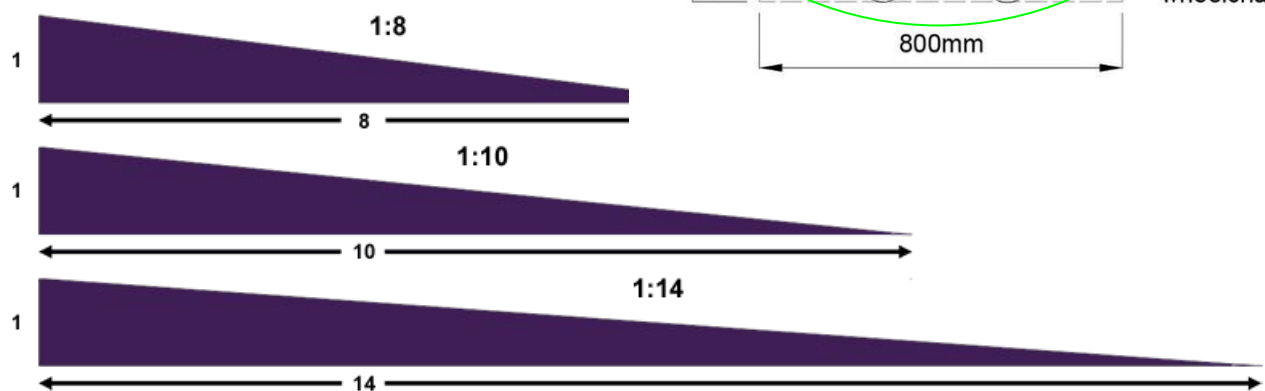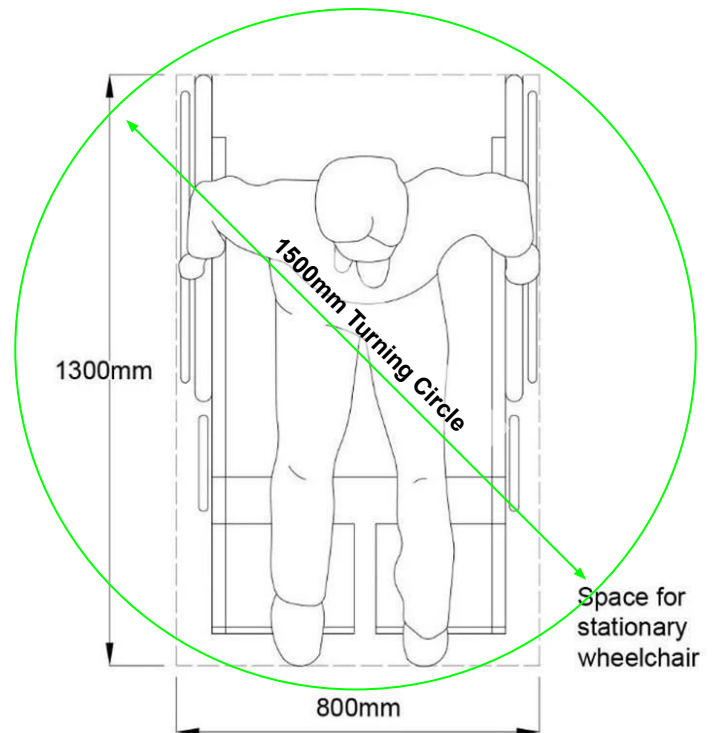

Note: This is general information only. Please refer to the AS 1428 standards and your designer/architect for advice on your specific needs.

Alucom | Security Doors & Screens

156 Gladstone Street, Fyshwick | alucom.com.au | 02 6280 7465

