

Kit Inclusions

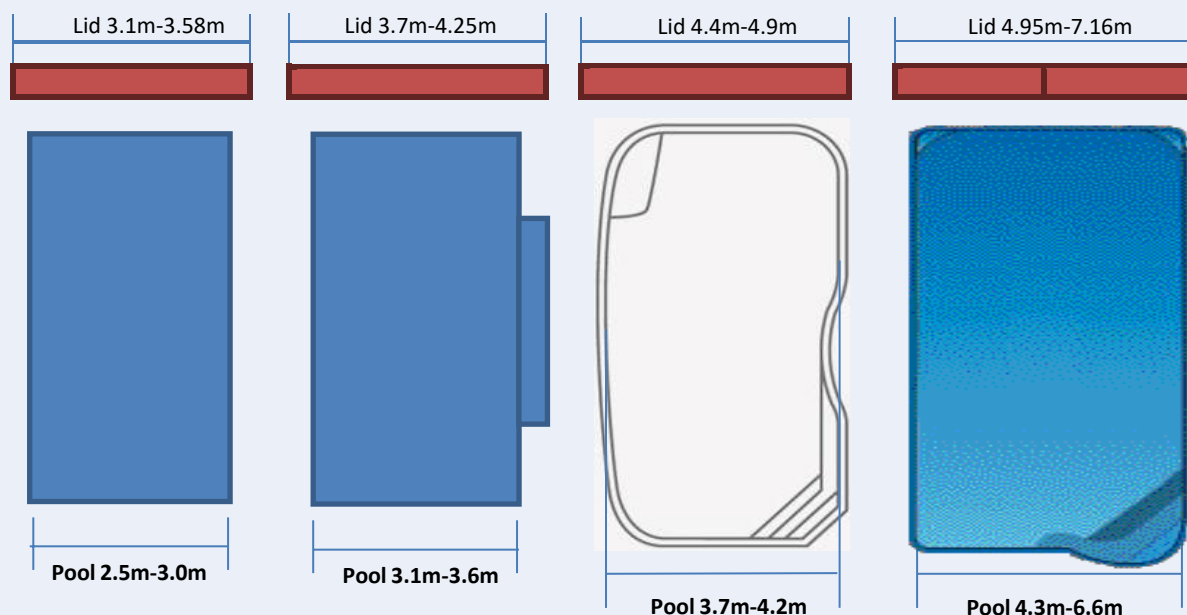
Suggested Size	Approx Waterline		Adjustable lid size	
Kit Name	Pool Min	Pool Max	Lid Min	Lid Max
Petite	1.50	1.80	2.30	2.50*
Narrow	1.85	2.30	2.73	3.05*
Small	2.40	2.90	3.10	3.58*
Medium	3.00	3.60	3.70	4.25*
Large	3.70	4.10	4.40	4.80*
LargePlus	4.20	4.20	4.40	4.90
Super (2 lids)	4.30	4.80	4.95	5.50*
SuperPlus (2 lids)	4.80	5.40	5.46	6.10*
SuperMax (2 lids)	5.50	6.00	6.20	7.16*+
Custom (2 lids)	6.10	6.60	6.20	7.16 *
CustomPlus (2lids)	6.10	7.20	6.20	8.40 ^

* Extended joiners increase Length up to 120mm
+ 6.4m tube (maximum pit 6.65m)
^ 7m tube with extension (maximum pit 7.850m)

Pro rata Warranty

(back to base in Nowra NSW, we will pay return freight only)
Gearbox and all non-moving parts 5 years
Motor 2 years
Gas Struts 2 years
Telescopic Roller Tube 5 years
Repair or replacement as determined by us

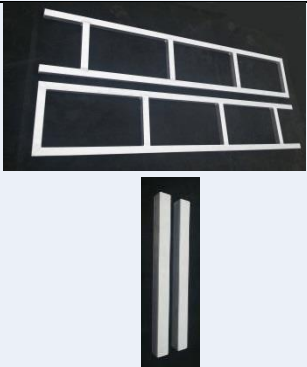

*Extended joiners increase Length up to 120mm or ** up to 240mm



There is no 'box' that drops or concretes into the ground. The installation cavity is created in a decking structure, concrete pit or another structure created on site.

Concrete & Under-Deck

Kit inclusions – Manual Winding

			
Gearbox Assembly	Lid frame with, attached stainless steel hinges & hinge plates	Lid Frame Support bars	End Mount
			
Gas strut(s) & Stainless-Steel Brackets	Flush Pull Handle & Handle Support Plate (Support plate tile lids only)	Roller tube & 2 end slugs	Winding handle

Instructions and Diagrams


Under-Deck Kit or Concrete Kit

Fixing Hardware & Installation Instructions Gas Strut setup



Mechanism Only

Kit inclusions – Manual Winding




			
Gearbox Assembly	Winding handle	End Mount	Roller tube & 2 end slugs

Instructions and Diagrams

Under-Deck Kit or Concrete Kit

Fixing Hardware & Installation Instructions

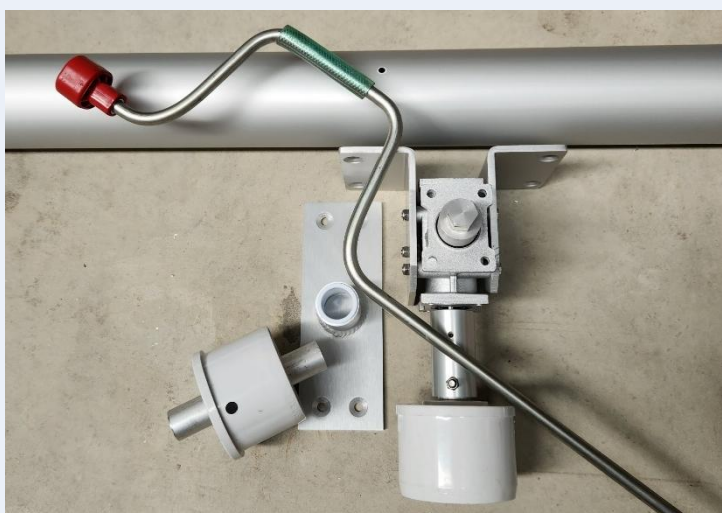
(No Tube) Kit inclusions

		
Gearbox Assembly (No End Slug)	Winding handle	End Mount

Instructions and Diagrams

Under-Deck Kit or Concrete Kit

Fixing Hardware & Installation Instructions



Powered Options

The Powered gearbox and handwheel replace the manual gearbox in powered kits

Power Semi remote control

		
Power Gearbox Assembly, 2 x remotes, Junction box & transformer, 5m cable	Handwheel	Retrofit Upgrade for Manual gearbox
Low wattage 24v system - Standard external power point required		

Power Lid Frame

			
Actuator Assembly with 5m cable	Stainless steel Brackets & Pins with hardware	Crossbar with brackets and screws	Cable clips

Instructions and Diagrams

Under-Deck Kit or Concrete Kit

Fixing Hardware & Installation Instructions

