


Date		Email:					
Name					Phone		
Address							
Suburb					Postcode		
Job Details							
Delivery Address	As above ☐						
Special Instructions							
Pool Type	Concrete ☐	Fibreglass ☐ *	Container/Plunge ☐		Above Ground ☐		
Fibreglass *	Manufacturer:	Fibreglass only		Shell Name:	Fibreglass only		
Pool Dimensions	Length			Width			
Step Areas**	Plan Required						
Kit Specific Details							
Installation Type	Concrete ☐	Under Deck ☐		Mechanism Only ☐		No Tube ☐	
Kit Type	Manual ☐	Power21 ☐ +		Power Lid System ☐			
Plan attached	Yes ☐ No ☐		Cable Length from transformer to motor				
Lid Frame Finish					☐ Timber runs length of lid frame ☐ Timber runs across lid frame		
Material for Lid	Tile Name:			Timber species:			
Dimensions	LxWxH:			WxH:			
Weight	Sqm		ea		Sqm		l/m
Material for lid	Other:						
Options – PLAN REQUIRED FOR ALL NON RECTANULAR POOLS							
Pool Cover Type				Colour			
Spa Cover Type				Colour			
Cover Attachment Kit	Yes ☐	No ☐	Haul Cord	No ☐	10m ☐	15m ☐	
Other information							

Gearbox or motor can go either side: Minimum .250m past waterline

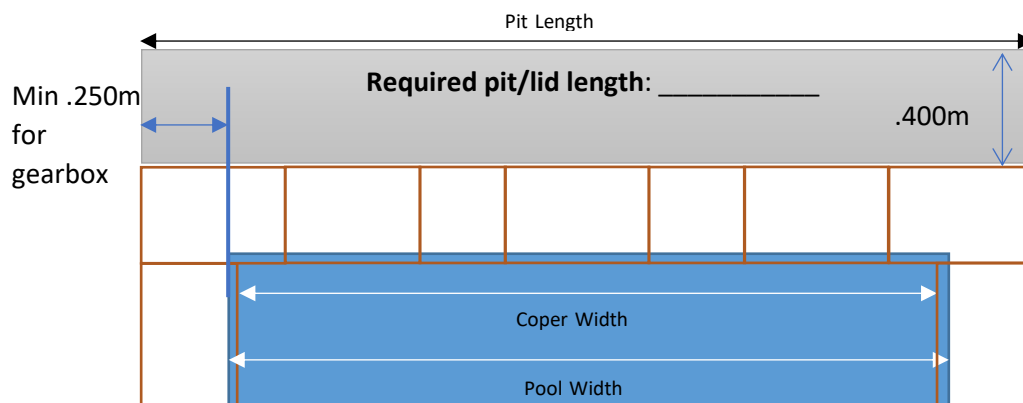

General lid length calculation if matching to copers
 Pool Waterline – coper overhang + coper width
 e.g. 3.0m – 0.06m + 0.8m = 3.74m

Pool Width	+ (side 1) Distance past waterline	+ (Side 2) Distance past waterline	- Coper overhang	= Lid Length
------------	------------------------------------	------------------------------------	------------------	--------------

SITE SPECIFIC DETAILS, if necessary

SKETCH

Kit Name	Approx Waterline		Adjustable lid size	
	Pool Min	Pool Max	Lid Min	Lid Max
Petite	1.50	1.80	2.30	2.50 *
Narrow	1.85	2.30	2.73	3.05 *
Small	2.40	2.90	3.10	3.58 *
Medium	3.00	3.60	3.70	4.20 *
Large	3.70	4.10	4.40	4.80 *
LargePlus	4.20	4.20	4.40	4.90
Super (2 lids)	4.30	4.80	4.95	5.50 *
SuperPlus (2 lids)	4.80	5.40	5.46	6.10 *
SuperMax (2 lids)	5.50	6.00	6.20	7.16*+
Custom (2 lids)	6.10	6.60	6.20	7.16*#
CustomPlus (2lids)	6.10	7.20	7.40	8.40 ^

*Extended joiners increase Lid Length up to approx 120mm

+ 6.4m tube (maximum pit 6.65m) – # 7m static tube

^ 7m static tube with extension (maximum pit 7.850m)

Each lid frame is adjustable within the Lid Min and Lid Max above plus the Extended Joiners, as required.