


Date		Email:						
Name					Phone			
Company Name								
Business Address								
Suburb					Postcode			
Accounts Email								
ABN					License No			
Job Details	Client Email for Warranty							
PO Number		Client Name						
Delivery Address								
Special Instructions								
Pool Type	Concrete ☐	Fibreglass ☐ *	Container/Plunge ☐			Above Ground ☐		
Fibreglass *	*Manufacturer:				*Shell Name:			
Pool Dimensions	Length				Width			
Step Areas**	Plan Required							
Kit Specific Details								
Installation Type	Concrete ☐	Under Deck ☐	Mechanism Only ☐			No Tube Only ☐		
Kit Type	Manual ☐	Power21 ☐ +				Power Lid System ☐		
Plan attached	Yes ☐ No ☐	Cable Length from transformer to motor				5m included if not specified		
Lid Frame Finish	Additional cross bars to support tile joins or screw lines		Quantity		☐ Timber runs length of lid frame ☐ Timber runs across lid frame			
Material for Lid	Tile Name:				Timber species:			
Dimensions	LxWxH:				WxH:			
Weight REQUIRED	Sqm		Or Ea.		Sqm		l/m	
Material for lid	Other:							
Options – PLAN REQUIRED FOR ALL NON RECTANULAR POOLS								
Pool Cover Type					Colour			
Spa Cover Type					Colour			
Cover Attachment Kit	Yes ☐	No ☐	Haul Cord	No ☐	10m ☐	15m ☐		

Gearbox or motor can go either side: Minimum .250m past waterline

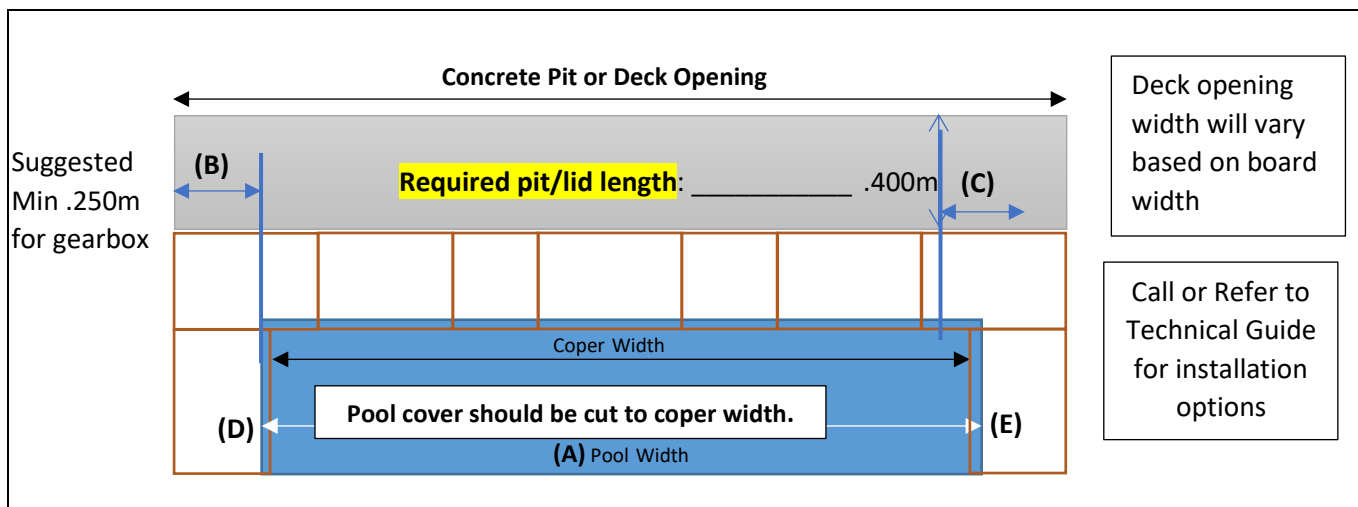

(A) Pool Width	+ (B) (side 1) Distance past waterline	+ (C) (Side 2) Distance past waterline	- (D+E) Coper overhang	= Pit Length
----------------	--	--	------------------------	--------------

SITE SPECIFIC DETAILS, if necessary

SKETCH – attach if necessary

Kit Name	Approx Waterline		Adjustable lid size	
	Pool Min	Pool Max	Lid Min	Lid Max
Petite	1.50	1.80	2.30	2.50 *
Narrow	1.85	2.30	2.73	3.05 *
Small	2.40	2.90	3.10	3.58 *
Medium	3.00	3.60	3.70	4.20 *
Large	3.70	4.10	4.40	4.80 *
LargePlus	4.20	4.20	4.40	4.90
Super (2 lids)	4.30	4.80	4.95	5.50 *
SuperPlus (2 lids)	4.80	5.40	5.46	6.10 *
SuperMax (2 lids)	5.50	6.00	6.20	7.16*+
Custom (2 lids)	6.10	6.60	6.20	7.16*#
CustomPlus (2lids)	6.10	7.20	7.40	8.40 ^

*Extended joiners increase Lid Length up to approx 120mm

+ 6.4m tube (maximum pit 6.65m) | # 7m static tube

^ 7m static tube with extension (maximum pit 7.750m)

Each lid frame is adjustable within the Lid Min and Lid Max above plus the Extended Joiners, as required.