

# SNCH0010

IR Housing



## Key Features



- Flap design for easy installation and maintenance.
- Rugged Aluminum Alloy Housing with IP66 Protection.
- Built-in IR module, illumination up to 80 m in low light.
- Wide operating temperature (-40°C to 60°C), built-in fan & heater.
- Flexible power supply: 110–240 VAC input, 12 VDC camera output.



## Specification

General	
Application Model	SN-IPCXXXXHAN, SN-IPCXXXXWAN
Material	Aluminum alloy
Color	White
Window Size	83 × 70 mm (3.27 × 2.76 in)
Product Dimensions (L × W × H)	Internal: 475.3 × 150.3 × 139.5 mm (18.72 × 5.92 × 5.49 in) External: 585 × 232.9 × 174.8 mm (23.03 × 9.17 × 6.88 in)
Net Weight	6.60 kg (14.55 lb)
Gross Weight	7.94 kg (17.5 lb)
Illumination	
Illumination Type	IR
Illumination Distance	Up to 80 m (262.47 ft)
Wavelength	850nm
Electrical	
Power Supply	110 ~ 240 VAC
Power Consumption	
Power Supply for Camera	12 VDC (via internal port)
Environmental	
Operating Temperature	-40°C ~ 60°C (-40°F ~ 140°F)
Operating Humidity	0% ~ 95% RH
Fan/Heater	Supported
Ingress Protection	IP66

## Dimensions (mm)

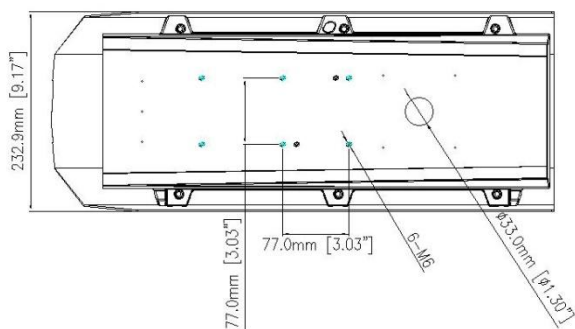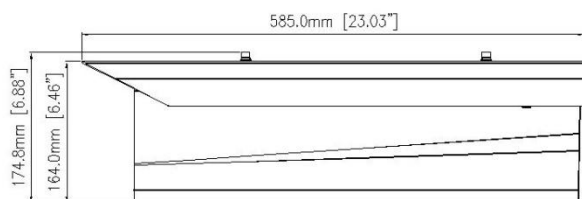

## Accessories

Optional:



SNCBK905  
Universal Joint



SNCBK508  
Wall Mount