

SNIPV8088ECARB

12MP Fisheye Network Camera



Key Features

- 1/1.7" 12MP STARVIS™ CMOS
- Max. 12MP(4000×3000) @ 25fps resolution
- Multi Dewarping modes and front end image correction
- Support face, human, vehicle detection and capture
- Intelligent analytics: intrusion, single line crossing, double line crossing, loitering, wrong-way, people counting, smart motion detection and heat map
- DWDR, 3D DNR, ROI, Defog, HLC
- Built-in microphone
- Smart IR distance up to 15 m
- IP66


Specification

Camera	
Image Sensor	1/1.7" Progressive Scan CMOS
Max. Resolution	12MP, 4000(H) × 3000(V)
Electronic Shutter	Auto/Manual, 1/5 to 1/50,000s
Min. illumination	Color: 0.01 Lux @ (F2.4, AGC ON) , B/W: 0 Lux with IR
Day & Night	IR cut filter
Wide Dynamic Range	DWDR
Lens	
Lens Type	Fixed-focal lens
Iris	Fixed Iris
Focal Length	1.8 mm
Max. Aperture	F2.4
Field of View (FOV)	180° × 180°
DORI Distance	
Detect	34.5 m (113.2 ft)
Observe	13.8 m (45.3 ft)
Recognize	6.9 m (22.6 ft)
Identify	3.45 m (11.3 ft)
DORI (Detect, Observe, Recognize, and Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances.	
Illuminator	
Illuminator Type	IR LED
Illumination Distance	Up to 15 m (49.2 ft.)
Illumination On/Off Control	Auto/ Manual
IR Wavelength	850 nm
Intelligent Analytics	
Multi-Object Detection	Supports face, human, vehicle detection and capture. Supports multiple frame modes: Full Frame, Four-corner Frame, and Mosaic.
Intelligent Analysis	Intrusion, Single line crossing, Double line crossing, Loitering, Wrong-way, and Smart motion detection. (Support available only in single-channel mode) Support alarm triggering by specified target types (human and vehicle).
People Counting	Supported
Heat Map	Supported
Video and Audio	
Streaming Capability	2 Streams

Main Stream	One-Channel: 25fps - Fisheye View: 4000×3000, 3000×3000, 2560×2560, 1280×960 - 180° Panorama View: 3000×752, 2560×640, 1920×480, 1280×960 - 360° Panorama View: 4000×2000, 2560×1280, 1920×960, 1280×960 - 4PTZ View: 4000×3000, 2048×1536, 1920×1440, 1280×960 - Fisheye + 3PTZ View: 4000×3000, 2048×1536, 1920×1440, 1280×960 Multi-Channel: 1520×1520, 1280×960, 960×960, 720×720, 640×640 @25fps
Sub Stream	One-Channel: 25fps - Fisheye View: D1, 640×640, 480×480 - 180° Panorama View: 832×208, D1 - 360° Panorama View: 640×640, D1 - 4PTZ View: D1, VGA, QVGA - Fisheye + 3PTZ View: D1, VGA, QVGA Multi-Channel: 640×640, D1 @25fps
Bit Rate Control	CBR/VBR
Bit Rate	One-Channel: - Stream1: 100Kbps to 16Mbps - Stream2: 100Kbps to 6Mbps Multi-Channel: - Stream1: 100Kbps to 12Mbps - Stream2: 100Kbps to 6Mbps
Smart Encoder	Supported
Region of Interest (ROI)	Support (Single-channel and fisheye mode)
Audio Compression	G.711 A-law, G.711 μ-law, RAW PCM
Audio Bit Rate	64 Kbps (G.711), 128 Kbps (RAW_PCM)
Image	
Image Adjustment	Brightness, Sharpness, Contrast, Saturation adjustable
Scene Setting	Indoor, Outdoor
Exposure Mode	Auto, Manual, Shutter priority
White Balance	Auto, Tungsten, Fluorescent, Daylight, Shadow, Manual
Day/Night Setting	Auto, Day, Night, Timer
Noise Reduction	2D/3D DNR
Image Enhancement	WDR, HLC, BLC, Defog
Privacy Masking	Support (Single-channel and fisheye mode)
Fisheye Display	
Mount Type	Ceiling Mount, Wall Mount, Desktop Mount
Decoding Mode	On-board Dewarping/Client-side Dewarping
Display Mode	12 display modes in total Client-side Dewarping: - 180° panorama view, 360° panorama view, 360° panorama + PTZ, 360° panorama + 3PTZ, 360° panorama + 6PTZ, 360° panorama + 8PTZ, Fisheye view, Fisheye + 3PTZ, Fisheye + 8PTZ, 4PTZ, 2PTZ, Fisheye + 1PTZ + 360° On-board Dewarping: - Fisheye view, Double panorama view, 4PTZ, Single panorama view, Fisheye + 3PTZ
Event	
Alarm Triggers	IVS, Motion detection, Alarm input, Network alarm, Disk alarm, Day/Night switch alarm, Abnormal sound detection

Events Actions	Alarm record, Alarm output, FTP upload, SMTP upload, Audible alarm output
Network	
Protocols	IPv4/IPv6, HTTP/HTTPS, DNS, DDNS, DHCP, PPPoE, RTSP/ RTP/RTCP, TCP/UDP, NTP, ARP, UPnP, FTP, SMTP, QoS, ICMP, IGMP, SMTP, 802.1x, SNMP, Multicast
Interoperability	ONVIF (Profile S/T/G/M), SDK, CGI
Max Concurrent Streams	10 channels
User/Host Level	32+ users, 3 levels: Administrator, Operator, Media user
Security	IP address filter, HTTPS, Illegal login lock, IEEE 802.1x
Cyber Security	ETSI EN 303 645, BSI IT Security Label, FIPS 140-3 Edge security Software: Signed OS, brute force delay protection, digest authentication and OAuth 2.0 RFC6749 Client Credential Flow/OpenID Authorization Code Flow for centralized ADFS account management, password protection, Sunell Cryptographic Module (FIPS 140-3 level 1), AES-XTS-Plain64 256bit SD card encryption Hardware: Sunell Edge Vault cybersecurity platform TPM 2.0 (CC EAL4+, FIPS 140-3 Level 2), secure element (CC EAL 6+), system-on-chip security (TEE), Sunell device ID, secure keystore, signed video, secure boot, encrypted filesystem (AES-XTS-Plain64 256bit)
Web Viewer	<IE11, Chrome, Firefox, Microsoft Edge
Interface	
Network Interface	1 Ethernet (10/100 Base-T) RJ-45 Connector
Built-in Microphone	Supported
Audio Interface	1ch Input, 1ch Output
Alarm Interface	1ch Input, 1ch Output
SD Card Slot	Built-in, up to 1 TB
Reset Button	Supported
General	
Language	English, Chinese, Traditional Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian, Japanese, Korean. Default: English
Power Supply	12 VDC (-15% to +20%) / PoE (802.3af)
Power Consumption	Max 9 W
Operating Temperature	-30°C to 60°C (-22°F to 140°F)
Operating Humidity	Less than 90% RH
Ingress Protection	IP66
Certifications	CE-EMC - EN 55032, EN IEC 61000-6-3, EN IEC 61000-3-2, EN 61000-3-3, EN 55035, EN 50130-4 FCC 47 CFR Part 15 Subpart B
Material	Aluminum alloy body, bubble: plastic
Dimensions	Φ130.1 × 38.3 mm (Φ5.12 × 1.51 inch)
Net Weight	Approx. 0.4 kg (0.88 lb)

Dimensions (mm)

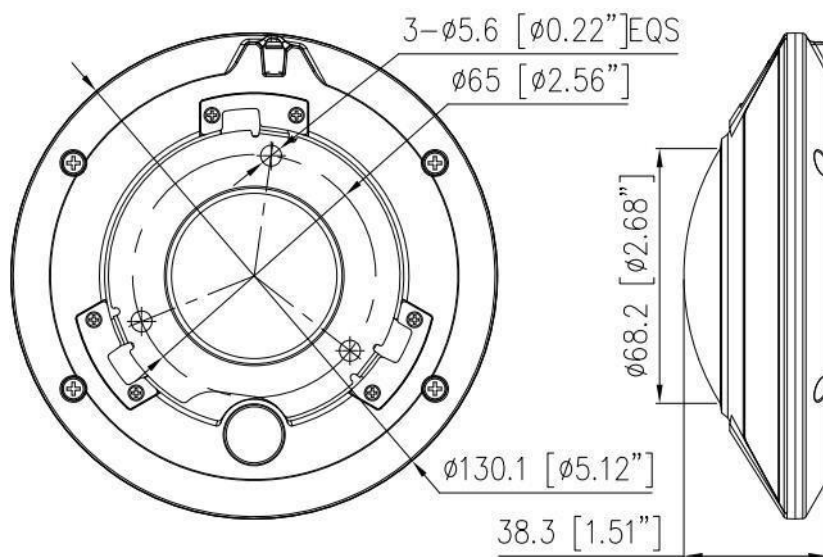

Accessories

Optional:



SN-CBK645E
Junction Box



SN-CBK201A
Pendant Cap



SN-CBK402
Pendant Mount



SN-CBK501
Wall Mount



SN-CBK502
Wall Mount



SN-CBK101
Pole Mount



SN-CBK102
Corner Mount