

A decorative background at the top of the page featuring a bokeh effect of colorful lights (red, orange, yellow, green, blue) against a dark background, with a green and blue wavy line separating it from the white content area below.

24/7 Colorful Imaging

Full-color Network Camera



Products

Full-color

NightHawk			
NightHawk		NightHawk	
	SNIPR8540HDAW • 4 MP, 1/1.8" CMOS • F1.0 • 2.8/4 mm • Built-in MIC • 40 m warm light • True WDR		SNIPR8540DQAW • 4 MP, 1/1.8" CMOS • F1.0 • 4.5 to 8/8 to 32 mm • P-iris • 40 to 60 m warm light • True WDR

Ultra				
				
SNIPR8041HCAW • 4 MP, 1/1.8" CMOS • F1.0 • 2.8/4 mm • Built-in MIC • 30 m warm light • True WDR	SNIPR8081HDAW SNIPR8041HDAW • 4 MP/8 MP, 1/1.8" CMOS • F1.0 • 4 mm • Built-in MIC • 30 m warm light • True WDR	SNIPR8081CQAW SNIPR8041CQAW • 4 MP/8 MP, 1/1.8" CMOS • F1.0 • 4 mm • Built-in MIC and sperker • 30 m warm light • True WDR	SNIPR8081CBAW SNIPR8041CBAW • 4 MP/8 MP, 1/1.8" CMOS • F1.0 • 4 mm • Built-in MIC and sperker • 30 m warm light • True WDR	SNIPR8081DQAW SNIPR8041DQAW • 4 MP/8 MP, 1/1.8" CMOS • F1.0 • 4 mm • Built-in MIC and sperker • 40 m warm light • True WDR

Pro			
			
SNIPR8080HCAW SNIPR8050HCAW • 5 MP/8 MP, 1/2.8" CMOS • F1.0 • 2.8/4 mm • Built-in MIC • 30 m warm light • True WDR	SNIPR8080CQAW SNIPR8050CQAW • 5 MP/8 MP, 1/2.8" CMOS • F1.0 • 2.8/4 mm • Built-in MIC and sperker • 30 m warm light • True WDR	SNIPR8050CBAW SNIPR8020CBAW • 2 MP/5 MP, 1/2.8" CMOS • F1.0 • 4 mm • Built-in MIC and sperker • 30 m warm light • True WDR	SNIPR8080DQAW SNIPR8050DQAW • 5 MP/8 MP, 1/2.8" CMOS • F1.0 • 4 mm • Built-in MIC and sperker • 40 m warm light • True WDR

Lite	
	SNIPR5180HZBW • 8 MP, 1/2.8" CMOS • F1.0 • 2.8/4 mm • Built-in MIC • 30 m warm light

Dual Light Full-color

Speed Dome		180° Panoramic	
	SNIPS8641YDSZ30		SNIPP8085QAS
	• 4 MP, 1/1.8" CMOS • 30 X, 7 to 210 mm • IR: 250 m(820 ft) • warm light: 60 m(200 ft) • Built-in MIC and speaker		• 2x 5MP 1/2.8" CMOS • 2.8 mm • Built-in MIC and speaker • 30 m IR, 20 m warm light • True WDR
		SNIPS8654ZDCZ5 SNIPS8654ZDSZ5 • 5 MP, 1/2.7" CMOS • 5 X, 2.7 to 13.5 mm • IR: 50 m(160 ft) • warm light: 30 m(100 ft) • Built-in MIC and speaker	

Ultra		
		
SNIPR8041CQAS	SNIPR8041CBAS	SNIPR8041DQAS
• 4 MP, 1/1.8" CMOS • 2.8/4 mm • Built-in MIC and speaker • 40 m IR, 30 m warm light • True WDR	• 4 MP, 1/1.8" CMOS • 4 mm • Built-in MIC and speaker • 40 m IR, 30 m warm light • True WDR	• 4 MP, 1/1.8" CMOS • 4 mm • Built-in MIC and speaker • 50 m IR, 40 m warm light • True WDR


Pro			
			
SNIPR8080CQAS SNIPR8050CQAS	SNIPR8050CBAS SNIPR8020CBAS	SNIPR8080DKAS	SNIPR8080DQAW SNIPR8050DQAW
• 5 MP/8 MP, 1/2.8" CMOS • 4 mm • Built-in MIC and speaker • 40 m IR, 30 m warm light • True WDR	• 2 MP/5 MP, 1/2.8" CMOS • 4 mm • Built-in MIC and speaker • 40 m IR, 30 m warm light • True WDR	• 8 MP, 1/2.8" CMOS • 2.8 mm • Built-in MIC • 40 m IR, 30 m warm light • True WDR	• 5 MP/8 MP, 1/2.8" CMOS • 4 mm • Built-in MIC and speaker • 50 m IR, 40 m warm light • True WDR

Key Features



24/7 Colorful Imaging

F1.0 aperture has better imaging effect in low light

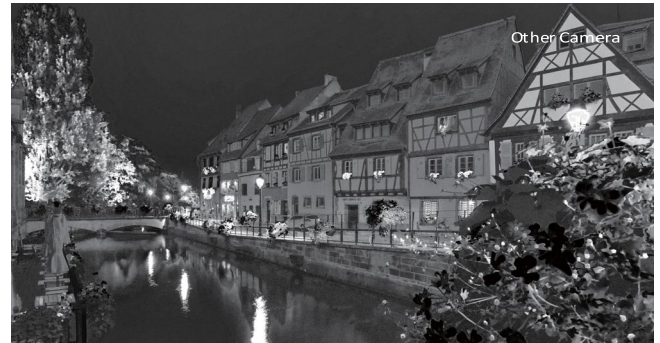

AI-ISP

Subvert Tradition, Computational Power Exchange Image



Energy Saving

Minimizing the Dependence on Supplementary Lighting



DSI Benelux B.V.

📍 Bolderweg 2 | 1332AT Almere | The Netherlands

☎ +31(0)85 - 044275 📠 +31(0)85 - 044276 ✉ sales@dsibenelux.nl

©2024 DSI/Shenzhen Sunell Technology Corporation. All rights reserved.

The specifications and descriptions of products and services contained in this catalogue were correct at the time of publishing. Inner Range reserves the right to change specifications or withdraw products without notice.