



Picture for reference only

Power Generator

FD 40 F-Q

Article: 49554

Code: F.0040.4.FEC2-Q2170T190-02

Main Features

- Digital voltage regulation +/-0,25 %
- Three phase voltage control
- Low disturbance level THD <3%
- Alternator short circuit capacity 320% 10s I_n (optional 300 %)
- Class H insulation
- Protection index IP23
- Performance class G3 (acc. ISO 8528-5)
- Ready to load just after start
- AMF and MRS functionality and protection
- Autonomy 24,0 h with 75 % load
- Compact designKompaktowe rozmiary
- Forklift manouvable from the front and side wall

General Data

Maximum power ESP	44,0 kVA / 35,0 kW
Nominal power PRP	40,0 kVA / 32,0 kW
Nominal Current PRP	58,0 A
Frequency	50 Hz
Voltage	400 V
Emission standard	Stage II
Fuel	Diesel (EN 590)
Fuel tank capacity	190 l
Fuel consumption @ 50% / 75% / 100% / 110% PRP	4,8 / 7,1 / 9,7 / 11,0 l/h
Autonomy @ 75% / 100% load	24,0 / 17,6 h
Weight without fuel	~935 kg
Dimensions L x W x H	2170 x 1020 x 1300 mm
Guaranteed noise power L_{wa}	92 dBA
Acoustic pressure @7mL_{pa}	62,8 ± 1 dBA

Main Components & Equipment

- FOGO D44R2-MP-ET-425 engine
- FOGO / Linz PRO18M E/4 alternator
- Brushless alternator
- Digital DVR
- ComAp IL4-AMF25 Controller
- Schneider Z63/4 type generator circuit breaker
- GCB shunt release coil
- Linear automatic battery charger
- Engine heater
- Electronic speed governor
- Fuel system Mechanical pump
- Welded frame with 190 l fuel tank, spill containment and noise insulation
- Two fuel inlets
- Four lifting eyes
- Extended forklift skids for easy attachment to the ground

For details see page 3

Definitions

Nominal Power PRP:

Refers to the maximum power accessible at the variable load for unlimited running hours per year, with the maintenance intervals and procedures being carried out as prescribed by Yuchai. The allowed average output power within 24 h shall not be higher than 70% of the prime power.

Maximum power ESP:

Standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload allowed, average power consumption should not exceed 70% ESP. Limited to 200h of operation per year.

Norms and Directives

- Machinery directive 2006/42/EC
- Low voltage directive 2014/35/EU
- EMC directive 2014/30/EU
- Noise directive 2000/14/EC
- ISO 8528-1/2018, ISO 8528-5/2022
- ISO 8528-13:2016
- IEC 60204-1

Contact data

FOGO Sp. z o.o.

Święciechowska 36, 64-115 Wilkowice
agregaty@fogo.pl, www.fogo.pl



Power Generator

FD 40 F-Q

Article: 49554
Code: F.0040.4.FEC2-Q2170T190-02

Engine


Manufacturer	FOGO
Type	D44R2-MP-ET-425
Made in	China
Engine power	36,0 kW
Emission standard	Stage II
Rotation per minute	1500 rpm
Engine governor	Electronic
Governor class	G3 (ISO 8528-5)
Displacement	2,5 l
No of cylinder	4
Fuel system	Mechanical pump
Electrical system	12 V
Cooling system capacity	13,5 l
Oil pan capacity	6,5 l
Fuel type	Diesel (EN 590)

Alternator

Manufacturer	FOGO / Linz
Type	PRO18M E/4
Made in	Italy
Nominal Voltage	400 V
Nominal power factor (cos φ)	0,8
Ambient temperature, altitude	40 °C, 1000 m a.s.l.
Nominal Power	42,0 kVA
Protection index	IP 23
No of bearing	Single bearing
Coupling	Direct
Technology	Brushless
Short circuit maintaining capacity	320% 10s
Efficiency	89,3 %
Insulation class	H
Total harmonic content THD	<3 %
Reactance Xd''	7,4 %
Voltage regulator type	Digital AVR
Voltage measurement	3 phase
Voltage accuracy	+/- 0,25 %
AVR supply system	Auxiliary winding
AVR supply optional	PMG

Controller

- Controller type: ComAp IntelliLite 4 AMF 25
- Support of Dual AMF/MRS applications
- Direct communication with EFI engines
- Total remote monitoring and control
- Intuitive operator interface, adjustable Main Screen
- Real time clock with battery back-up
- Comprehensive history log with up to 350 events
- 3 phase true RMS current and voltage measurement
- Both mains and generator voltage detection
- Active/Reactive Power and Power Factor per phase measurement
- Run Hours counter with source selector
- 3 maintenance timers (counting even under zero)
- Multipurpose flexible timers (also for rental)
- Battery voltage measurement
- Complete engine and alternator protection
- CAN modules support
- USB port on-board
- Inbuild RS485
- 2 slots for plug-in modules
- Full remote communications support (AirGate 2.0)
- Plug-in module concept for more remote communication capabilities (Ethernet /4G, Modbus TCP/RTU, SNMP v1/v2c.)
- Cloud-based monitoring and control via WebSupervisor (optional module required)
- Geofencing and tracking based on GPS position (optional module required)
- Active SMS and emails
- 3 levels of password protection
- Cyber security improvement
- In-built PLC, complemented with a monitoring/debugging tool, for additional functionality, if required
- Spare inputs and outputs available by default: binary input – 1, binary output – 3, analogue input – 0,
- A version for low temperature is also available

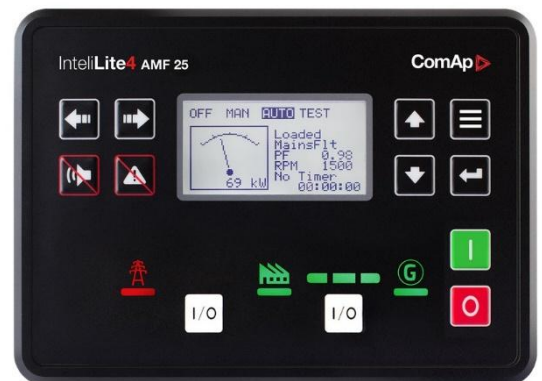



Power Generator FD 40 F-Q

Article: 49554
Code: F.0040.4.FEC2-Q2170T190-02

Standard equipment

- FOGO D44R2-MP-ET-425 engine
- Electronic engine speed governor
- Oil pressure sensor
- Engine high temperature sensor
- Engine preheating with thermostat
- Engine oil Titan Cargo 15W40
- Coolant Fuchs Maintain Fuchs Maintain Fricofin LL 50
- Coolant inlet outside, on the top of the canopy
- Starting batteries 100 Ah
- Linear automatic battery charger
- FOGO / Linz PRO18M E/4 alternator
- Digital AVR
- GCB Schneider Z63/4
- GCB shunt release coil
- ComAp IL4-AMF25 controller
- Acoustic alarm
- Emergency stop button
- Silenced canopy, RAL 7024
- Fuel tank integrated with a frame and spill containment 1
- Two fuel inlets inside the canopy
- Fuel level indicator
- Engine and alternator anti vibration mounts
- Exhaust silencer with compensator
- Forklift supports and lifting eyes

Optional equipment

- Electronic engine speed governor 1
- Oil draining hand pump -1
- Oil pressure sensor 1
- Engine high temperature sensor 1
- Battery disconnecter
- GCB
- Power Lock type power output
- Power sockets box
- Transfer switch controlled by generator controller
- Transfer switch with ATS controller
- ATS accessories for outdoor application
- GPRS communication card
- Ethernet card
- RS 485, RS 232 card
- Remote display
- Fuel inlet outside of the canopy with lock
- Generator spill containment level detector
- External, double wall fuel tank 1 000 – 10 000 l
- Fuel tank filling pump and shut-off valve

Maintenance guidelines

Fuel filters replacement	500 h / 1 year
Oil replacement	After first 100h / year, then every 500 h / 1 year
Oil filters replacement	After first 100h / 1 year, then every 500 h / 1 year
Coolant replacement	3000h / 2 years
Air filter replacement	1000 h
Battery replacement	2 years
Electrical installation	According to local requirements, at least once per year

Installation guidelines

Power terminal	GCB terminal
Recommended cable for up to 30m power cable way	Flexible 5x16 mm ²
Recommended cable for do 30m generator heater supply	Flexible 3x2,5 mm ²
Exhaust pipe min diameter (max. 7 m, 4 bends)	60,3 mm
Exhaust pipe min diameter (max. 15 m, 4 bends)	60,3 mm

*For additional cable connection with FOGO ATS see ATS wiring diagram

Warranty

Continuous operation generators	12 months up to 1000 working hours
--	------------------------------------