



JL-TRF24-M50W-CCT

LED TROFFER LIGHT

DESCRIPTION

2' x 4' LED Troffer light | Wattage Selectable | CCT Selectable | 125-130lm/W | 0-10V Dimming



CONSTRUCTION

Constructed of one-piece ribbed unitized housing and corners that interlock, preventing damage to luminaire. All sides and corners are turned in and hemmed, removing sharp edges for safe handling and installation.

ELECTRICAL

Luminaire is built with the highest quality driver that is Universal Voltage(120V-277V), uses long lasting, highly-efficient LED packages.

OPTICAL SYSTEM

Designed to reduce glare and improve light distribution through precision formed

DIMMING

Continuous dimming (0-10V) comes standard.

LISTING

ETL, DLC, FCC, RoHS

WARRANTY

5 Years Limited Warranty, Rated for 50,000 hours (Refer to your warranty documentation for more information.)

FEATURES

Size	2'x4' (47.72" x 23.74" x 1.97")
5Wattage	25W/30W/35W/ 40W/50W (Selectable)
5CCT	3500K/4000K/5000K/ 5700K/6500K (Selectable)
Efficiency	125-130lm/W
Lumens	3250-6250lm
Beam Angle	120°
Input Voltage	120-277V AC
Frequency Range	50/60Hz
CRI	>80
PF	>0.9
THD	<=20%
Dimming	0-10V DC
Lifetime	50,000 hours



JL-TRF24-M50W-CCT


LED TROFFER LIGHT

ORDERING INFORMATION

Model	Size	Wattage	Voltage	Lumens	Efficacy	CCT	Dimming	Dimensions
JL-TRF24-M50W-CCT	2x4	25W, 30W, 35W, 40W, 50W (Selectable)	120-277V	3250lm, 3900lm, 4550lm, 5000lm, 6250lm	125- 130 lm/W	3500K, 4000K, 5000K, 5700K, 6500K (Selectable)	0-10V	47.72"L x 23.74"W x 1.97"H

PHYSICAL SPECIFICATIONS

Unit: mm/inch

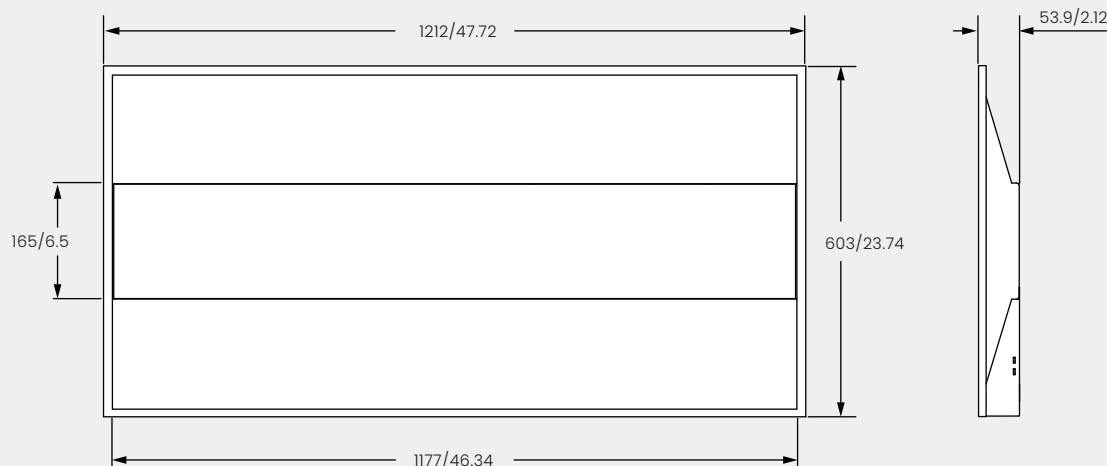

Dimensional tolerances: (+1.5mm, -1.0mm)

WEIGHT INFORMATION

1 Piece

9.55 lbs.

PHOTOMETRIC DATA

