

Eagle Eyes-AIHL

6th/7th Generation Intel® Xeon® E3/Core™ S Series (FCLGA1151 Socket) Box Computer, 2x RJ45 GbE



Features

- 6th/7th gen Intel® platform (formerly Skylake/Kaby Lake), Xeon® E3/Core™ S i7, i5, i3, Pentium® and Celeron® processor
- Supports LGA1151 socket desktop processor up to 35W
- Intelligent eKit with AI function to monitor system health via DDM
- Wi-Fi and wireless communications: 4G, WLAN, GPS, GSM//GPRS, and Bluetooth
- Special Power Design:
 - Wide voltage 9~36V DC input
 - RVP/OVP/UV/OC/PC support
 - Surge protection: 200V/1ms
 - Power ignition control
- Easy Expansion & Installation:
 - One side bezel access and easy cable management
 - Remote on/off power switch with LED
 - Easily replaceable RTC battery holder
 - 3x SIM Push-Push sockets
 - 2x M.2 2280 NVMe (PCIe x4) supported optional



DDM



Multi-LAN



Multi-USB



RS-232/422/485



4K Support



4K Support



Wide Range DC Input 9~36V



Wide Range DC Input 9~36V



Wide Range DC Input 9~36V




Wide Range Operating

Specifications

System	
CPU	6th/7th gen Intel® Xeon® E3/Core™ S (formerly Skylake/Kaby Lake) LGA1151 socket type CPU (supports TDP up to 35W)
Chipset	Intel® C236 Chipset
Memory	2x DDR4 SO-DIMM Max. 64GB (Skylake: DDR4-2133; Kaby Lake: DDR4-2400)
Graphics	Xeon®: HD Graphics P530 (Skylake)/P630 (Kaby Lake) Core™ i Series: HD Graphics 530 (Skylake)/630 (Kaby Lake) Pentium®/Celeron®: HD Graphics 510 (Skylake)/610 (Kaby Lake)
BIOS	AMI 128Mbit SPI BIOS
AI Controller (AIC)	AI for system monitoring and predictive analysis
Watchdog Timer	Runtime: 10 – 65535 seconds Powerup: 120 – 65535 seconds
TPM (optional)	Infineon OPTIGA™ SLB9665 (TPM 2.0) / SLB9635 (TPM 1.2)
Power	
DC Input	9~36VDC
Surge Protection	200V/1ms
Power in Protection	Reverse-Voltage, Over-Voltage, Under-Voltage, Over-Current
Remote/Ignition	1x ATX power on/off switch, 5-pin terminal block including 3-pin remote control and 2-pin ignition signals (pitch 3.81 mm)
Power Mode	AT/ATX (BIOS setting)
Mechanical	
Dimensions (WxDxH)	260(W) x 206(D) x 77.42(H) mm (10.24" x 8.11" x 3.05")
Weight (net/gross)	3.7kg
Mounting	Foot stand; wall mount bracket (optional)
Construction	Aluminum and metal chassis with fanless design
Battery	Easily replaceable RTC battery holder
Dynamic Display Module (DDM)	0.96 inch LCM work with AIC to display system status
External IO	
Display Ports / Resolution	2x DP/4096x2304@60Hz 1x DVI-D/1920x1200@60Hz 1x VGA/1920x1200@60Hz
Triple Display Ports Combinations	2x DP + 1x DVI-D 2x DP + 1x VGA 1x DP + 1x DVI-D + 1x VGA
Ethernet	2x RJ45 GbE (Intel® i219 + Intel® i210) / Wake-on-LAN and PXE/ i219 supports iAMT 11.0
PoE (optional)	NA
USB 3.0/2.0	6x USB 3.0 ports via native XHCI controller (0.9A each port)
COM	2x RS-232/422/485 (auto flow control), 4x RS-232 port
Digital I/O	16-bit programmable DIO (AIHL) 8-bit isolated DI & 8-bit isolated DO, sink/source mode, 5~48V, 100mA (AIHL-i)
Audio	ALC892 HD audio codec, Mic in, Line out
SIM and USIM Socket	3x SIM Push-Push sockets – SIM supports 2G USIM supports 3 & 4G
Wi-Fi/Cellular	Supports Wi-Fi/LTE modules via 3x Mini PCIe interfaces


Storage	
Internal Drive Bay	3x internal SATA port for 2.5" HDD/SSD
mSATA	3x full length mSATA (muxed with Mini-PCIe)
Removable Drive Bay	NA
NVMe Support	2x M.2 2280 NVMe supported via expansion slot optional
RAID Mode	RAID 0/1/5
Expansion Slot	
Mini-PCIe	3x full length Mini PCIe (muxed with mSATA, auto detection)
IOM1 (optional)	Supports IOM1 module
Other	
USB 2.0 Dongle	Internal 1x USB 2.0 for dongle security key
Antenna	4x antenna openings
LED	Power status, HDD status, IO status
Environment	
Operating Temperature	Standard: -20°C to 50°C (-4°F~122°F), supports 35W TDP CPU Extended temperature: -25°C to 70°C (-13°F~158°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Relative Humidity	95% @ 40°C (104°F), non-condensing
Vibration During Operation	5Grms with SSD (IEC60068-2-64: random 5~500Hz)
Shock During Operation	50Grms with SSD (IEC60068-2-27: Half Sine, 11ms duration)
Certification	
EMC	CE/FCC Class A
Safety Certifications	CB
OS Support	
Windows	Windows 7 32-bit/64-bit (Skylake only) Windows 8.1 32-bit/64-bit (Skylake only) Windows Embedded Standard 7 (Skylake only) Windows Embedded 8 Standard (Skylake only) Windows 10 64-bit Windows 10 IoT
Linux	Linux

I/O Interfaces

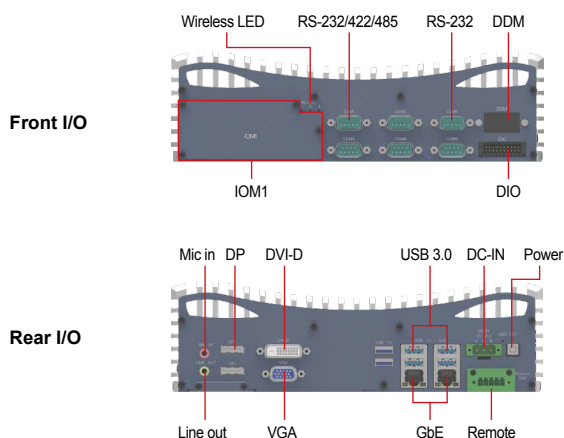

Dimensions

Units: mm

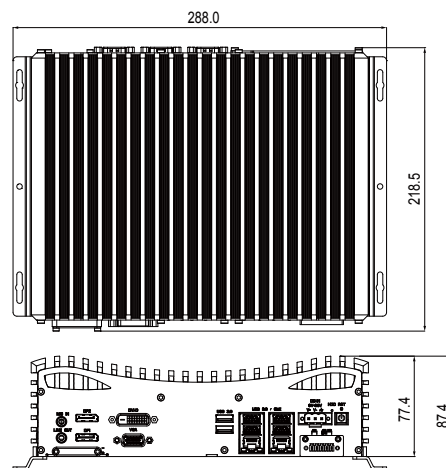

I/O Comparison Chart

Model Name	DP	DVI-D	VGA	GbE (RJ45)	GbE / PoE (RJ45)	DIO	USB 3.0	RS-232	RS-232 / 422 / 485	M.2 2280 NVMe	Internal 2.5" Disk Bay
AIHL						16-bit DIO				0	
AIHL-i	2	1	1	2	0	8-bit isolated DI & 8-bit isolated DO	6	4	2		3
AIHL-NVMe						16-bit DIO				2	
AIHL-i-NVMe						8-bit isolated DI & 8-bit isolated DO					

Ordering Information

Model Name	Article Number (A/N)
AIHL Barebone System	01201
AIHL-i Barebone System	01202
AIHL-NVMe Barebone System	01A51
AIHL-i-NVMe Barebone System	01A52

CPU (Optional)

6th Gen Skylake

E3-1268Lv5	Xeon® E3-1268L v5 (4 cores/8 threads, 2.4 GHz/3.4 GHz, 8MB cache, 35W TDP)
i7-6700TE	Core™ i7-6700TE (4 cores/8 threads, 2.4 GHz/3.4 GHz, 8MB cache, 35W TDP)
i5-6500TE	Core™ i5-6500TE (4 cores/4 threads, 2.3 GHz/3.3 GHz, 6MB cache, 35 W TDP)
i3-6100TE	Core™ i3-6100TE (2 cores/4 threads, 2.7 GHz, 4MB cache, 35 W TDP)
G4400TE	Pentium® G4400TE (2 cores/2 threads, 2.4 GHz, 3MB cache, 35 W TDP)
G3900TE	Celeron® G3900TE (2 cores/2 threads, 2.3 GHz, 2MB cache, 35 W TDP)

7th Gen Kaby Lake

i7-7700T	Core™ i7-7700T (4 cores/8 threads, 2.9 GHz/3.8 GHz, 8MB cache, 35W TDP)
i5-7500T	Core™ i5-7500T (4 cores/4 threads, 2.7 GHz/3.3 GHz, 6MB cache, 35W TDP)
i3-7101TE	Core™ i3-7101TE (2 cores/4 threads, 3.4 GHz, 3MB cache, 35W TDP)

Optional Accessories

IOM1 Module

	IOMH1-4GR	4x RJ45 GbE
	IOMH1-4GRP	4x RJ45 GbE with PoE (30.4W each port)
	IOMH1-4GM	4x M12 GbE
	IOMH1-4GMP	4x M12 GbE with PoE (30.4W each port)
	IOMH1-4U3	4x USB 3.0
	IOMH1-2SFP+	2x 10GbE Fiber ethernet

Isolated Module

iDIO-8I8O	8-bit isolated DI & 8-bit isolated DO module
-----------	--

Other Accessories

AC-DC Power Adapter	AC-DC power adapter with pitch 5.0mm 3-pin terminal block plug
ADT-24V60-T3A	24V/60W
ADT-24V90-T3A	24V/90W
ADT-24V120-T3A	24V/120W
ADT-24V160-T3A	24V/160W
ADT-24V220-T3A	24V/220W
ADT-24V280-T3A	24V/280W
AC Power Cord	H05VV-F 3G 0.75mm ² , 1.8m, 250V, 10A
PCBL-B12	YP12-YC12:category B type plug, TW/JP/US/CA/TH/PH/Central America
PCBL-D03	YP03-YC12:category D type plug, CN
PCBL-D35	YP35-YC12:category D type plug, AU/NZ
PCBL-G22	YP22-YC12:category G type plug, DE
PCBL-I61	YP61-YC12:category I type plug, UK/HK/MO/SG/MY
SO-DIMM Memory	DDR4-2133/2400 2GB/4GB/8GB/16GB/32GB
SSD	mSATA SSD: 16GB/32GB/64GB/128GB/256GB/512GB/1TB 2.5 inch SSD: 16GB/32GB/64GB/128GB/256GB/512GB/1TB 2.5 inch HDD: 500GB/1TB/1.5TB/2TB
Wireless Module	Mini PCIe wireless module for 3G/4G LTE/Wi-Fi/BT/Nb-IoT/GPS/BDS
Cable & Connector	
CBL-S01	1x SATA (Data + Power) cable
TBP5-S03	1x 3-Pin, pitch5.0mm Female Terminal Block Plug for DC input
TBP3-S05	1x 5-Pin, pitch3.81mm Female Terminal Block Plug for remote connector
TBP3-D20	1x 2x10-Pin, pitch2.54mm Female Terminal Block Plug for DIO connector
Mounting Kit	
WBK-AIH	2x Wall mount bracket with 6x M3x6 screws

Packing List

Item No.	
1	1x Eagle Eyes Embedded Box PC AIH
2	4x Rubber foot with 6x M3x6 screws