

MT-117



Official tyre for the 18,000km, 32-day Silverstone Inner Mongolia Expedition

- Known as the “King Of 4x4 Tyres”.
- Rugged tyre construction makes it ideal for the toughest off-road challenges.

Tyre Size	Load/Speed Index	Type	Rim Width [inch]		Section Width [mm]	Overall Diameter [mm]
			Recommended	Permitted		
285/85-16 6PR	116/114L	TT	7.5	7.0 – 8.0	285	900
750 - 16C 8PR	112/110L	TT	6.0	5.5 – 6.5	202	824
750 - 16C 10PR	116/114L	TT	6.0	5.5 – 6.5	202	824
750 - 16C 12PR	121/120L	TT	6.0	5.5 – 6.5	202	824

MT-117EX



Official tyre for the 17,000km, 33-day Silverstone TransAfrica Expedition. Bestowed the “MITI Product Excellence Award 1998”

- Its superb all-terrain off-road capabilities and robust construction make it an excellent choice when encountering varying ground conditions.

Tyre Size	Load/Speed Index	Type	Rim Width [inch]		Section Width [mm]	Overall Diameter [mm]
			Recommended	Permitted		
32x11.50R15LT	113Q	TL	9.0	8.0 – 10.0	290	807
275/70R16	114Q	TL	8.0	7.0 – 9.0	279	792
215/75R16	103Q	TL	6.0	5.5 – 7.0	216	728

MT-117 Sport



- The new steel belted radial construction of the “King Of 4x4 Tyres”.
- Superior tread design element enhances traction on loose ground, mud and snow conditions.
- Incorporates Silverstone's advanced directional “V” shape tread block design for superior self-cleaning capability and maximum performance even in the toughest terrain.
- Optimum void-to-rubber ratio provides superior traction in any off-road conditions.
- The sidewall block elements provide additional traction and thus reduce the chances of getting stuck in deep gumbo mud conditions.
- Reinforced full width steel belts and robust casing construction enhance puncture and bruise resistance.
- Specially formulated tread compound provides exceptional cutting and chipping resistance.

Tyre Size	Load/Speed Index	Type	Rim Width [inch]		Section Width [mm]	Overall Diameter [mm]
			Recommended	Permitted		
31x10.50R15LT	109S	TL	8.5	7.0 – 9.0	268	781
33x12.50R15LT	108Q	TL	10.0	8.5 – 11.0	318	832
265/70R16	112Q/S	TL	8.0	7.5 – 9.0	272	778
285/75R16	116Q	TL	8.0	7.5 – 9.0	286	840


MT-117 Xtreme



- LIGHT WEIGHT – Special light weight construction design and supple sidewall provide excellent traction when driving through deep gumbo mud.
- OPEN BLOCK TREAD DESIGN – Open block tread design enhances mud digging and self cleaning capabilities for superior traction in muddy conditions.
- TREAD COMPOUND – Specially formulated silica-based tread compound minimises tread cutting and chipping to provide superior traction.

Tyre Size	Load/Speed Index	Type	Rim Width [inch]		Section Width [mm]	Overall Diameter [mm]
			Recommended	Permitted		
31x10.50-15LT	110L	TL	8.5	7.0 – 9.0	268	781
33x9.50-15LT	113L	TL	7.5	6.5 – 8.5	240	832
33x10.50-15LT	115L	TL	8.5	7.0 – 9.0	268	832
35x10.50-15LT	120L	TL	8.5	7.0 – 9.0	268	883
35x11.50-15LT	122L	TL	9.0	8.0– 10.0	290	883
31x10.50-16LT	109L	TL	8.5	7.0 – 9.0	268	781
33x9.50-16LT	112L	TL	7.5	6.5 – 8.5	240	832
33x10.50-16LT	114L	TL	8.5	7.0 – 9.0	268	832
35x10.50-16LT	119L	TL	8.5	7.0 – 9.0	268	883
35x11.50-16LT	120L	TL	9.0	8.0 – 10.0	290	883

PRODUCT CATALOGUE

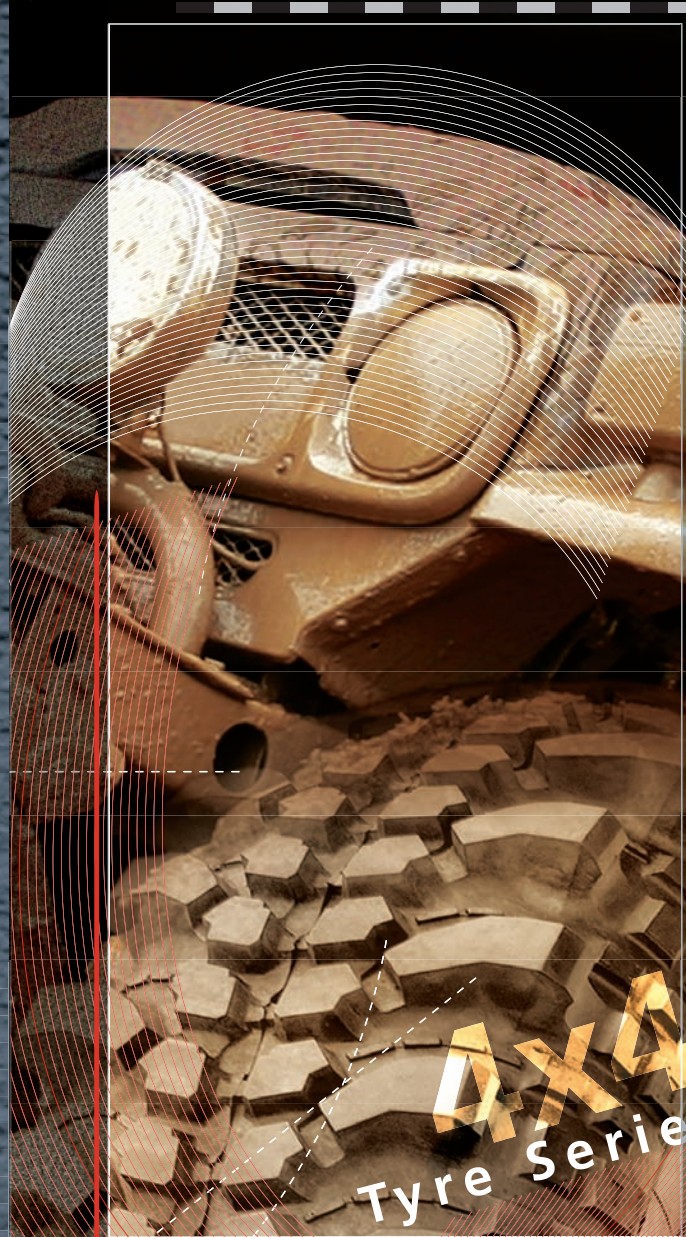

SILVERSTONE
HIGH PERFORMANCE TYRES

HT-778



- Developed specially for on-road driving and offers excellent ride comfort with smooth and quiet highway cruising characteristics.
- Adopts a new 4x4 tyre construction technique to ensure maximum performance.
- Computerised tread pitch design provides superior grip and even wear rate.
- Multi-siping orientation enhances traction.
- Incorporates longitudinal center groove to provide high speed tracking stability.
- Sinusoidal groove configuration enhances hydro planing resistance and also ensures well balanced performance in both dry and wet conditions.

SQ178



- Developed specifically for on-road driving and gives excellent ride comfort with smooth and quiet highway cruising characteristics.
- Special construction ensures even wear and higher mileage.

AT-117 Special



The “Master Of All Terrain”
A balanced construction design makes this tyre a joy to use both on and off-road. On-road, it delivers a reasonably comfortable ride, while being able to easily surmount most off-road terrain.

SQ 278



- Ideal for both on and off-road activities.
- Radial construction offers good traction on loose and rough surfaces by virtue of its block tread pattern with deep grooves, yet cruises smoothly on tarmac.

SILVERSTONE TYRES AUSTRALIA

VIC / SA / NT - Chapel Corner Tyres – (03) 9534 2798
QLD - Neta Tire Service – (07) 3266 7377
NSW - Maher Tyre Service – (02) 9708 1711
WA - Cometti Tyre Wholesalers – (08) 9445 9422
TAS - Sparco Tyres – (03) 6234 8099

Tyre Size	Load/Speed Index	Type	Rim Width [inch]		Section Width [mm]	Overall Diameter [mm]
			Recommended	Permitted		
235/75R15	105S	TL	6.5	6.0 – 8.0	235	733
205/70R15	96S	TL	6.0	5.0 – 7.0	209	669
255/70R15	108S/T	TL	7.5	6.5 – 8.5	260	739
265/70R15	112S	TL	8.0	7.0 – 9.0	272	753
30x9.50R15LT	104S	TL	7.5	6.5 – 8.5	240	750
31x10.50R15LT	109S	TL	8.5	7.0 – 9.0	268	775
265/75R16	116S	TL	7.5	7.0 – 9.0	267	804
235/70R16	105S/T	TL	7.0	6.0 – 8.0	240	736
245/70R16	107S/T	TL	7.0	6.5 – 8.0	248	750
265/70R16	112S	TL	8.0	7.0 – 9.0	272	778
275/70R16	114S	TL	8.0	7.0 – 9.0	279	792
255/65R16	109S/T	TL	7.5	7.0 – 9.0	260	738

Tyre Size	Load/Speed Index	Type	Rim Width [inch]		Section Width [mm]	Overall Diameter [mm]
			Recommended	Permitted		
215R15	100S	TL	6.0	5.5 – 7.0	218	724
205/70R15	95Q/S	TL	6.0	5.0 – 7.0	209	669
31x10.50R15LT	109Q/S	TL	8.5	7.0 – 9.0	268	775
205R16 (Reinf)	104S	TL	6.0	5.0 – 7.0	208	736
215/80R16	103Q/S	TL	6.0	5.5 – 7.0	216	750

Tyre Size	Load/Speed Index	Type	Rim Width [inch]		Section Width [mm]	Overall Diameter [mm]
			Recommended	Permitted		
235/75R15	105S	TL	6.5	6.0 – 8.0	235	733
265/75R15	105S	TL	7.5	7.0 – 9.0	272	778
255/70R15	108Q/S	TL	7.5	6.5 – 8.5	260	739
30x9.50R15LT	104Q/S	TL	7.5	6.5 – 8.5	240	750
31x10.50R15LT	109S	TL	8.5	7.0 – 9.0	268	775
265/75R16	116Q	TL	7.5	7.0 – 9.0	267	804
245/70R16	107Q/S	TL	7.0	6.5 – 8.0	248	750
265/70R16	112Q/S	TL	8.0	7.0 – 9.0	272	778
275/70R16	114S	TL	8.0	7.0 – 9.0	279	792

Tyre Size	Load/Speed Index	Type	Rim Width [inch]		Section Width [mm]	Overall Diameter [mm]
			Recommended	Permitted		
195R15	94S	TL	5.5	5.0 – 6.5	198	690
215R15	100S	TL	6.0	5.5 – 7.0	218	724

www.silverstone.com.my

SILVERSTONE
HIGH PERFORMANCE TYRES