



Extraction Fans


Works with IAP Source Capture devices for direct mount or remote mount.

888-372-0050


Sales@IAP-AirProducts.com

www.IAP-AirProducts.com

Extraction Fans

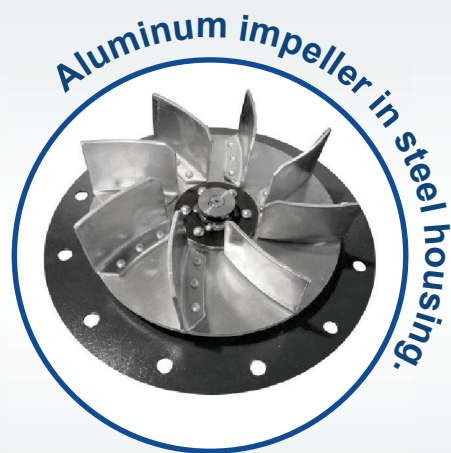

1 HP, 1.5 HP, 2 HP or 3HP

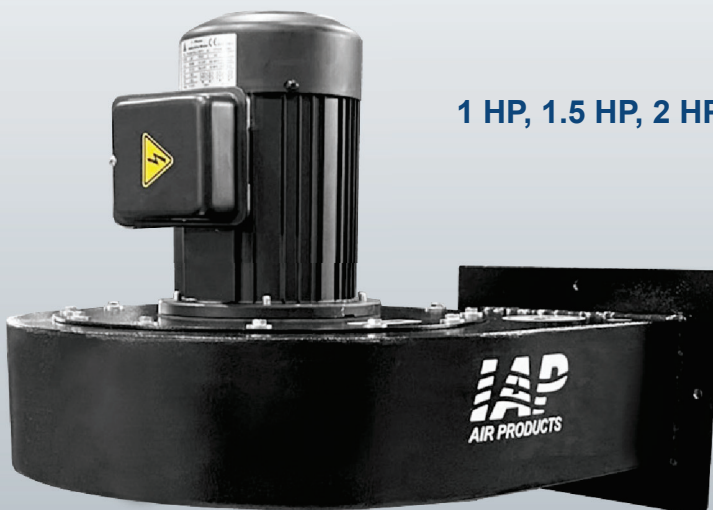



Applications:




- Standard temperature resistance up to 195F
- Recommended airflow range 600 - 1900 cfm
- 4", 5", 6" and 8" arms

Features:

- Customer to select fume arm size
- Square to round outlet
- Converter tube
- Wall mounting bracket
- Heavy gauge powder coated steel

Technical Data:

Model type	Motor	Nominal capacity [cfm]	Dimension [L x W x H]	Inlet Ø [inches]	Outlet Ø [inches]	Supply Power	dBA
FAN-DM-1HP-110V-1P	1HP	600	20.8" x 17.4" x 16.4"	4	6	110V/60Hz/1Ph	79
FAN-DM-1.5HP-110-220V-1P	1.5HP	900	19.9" x 18.9" x 17.5"	6	6	110V or 220V/60Hz/1Ph	81
FAN-DM-2HP-110-220V-1P	2HP	1600	19.9" x 18.9" x 17.5"	8	8	110V or 220V/60Hz/1Ph	83
FAN-DM-3HP-3P	3HP	1900	21.5" x 20.5" x 21.85	8	8	208-230V or 460V/60Hz/3Ph	84

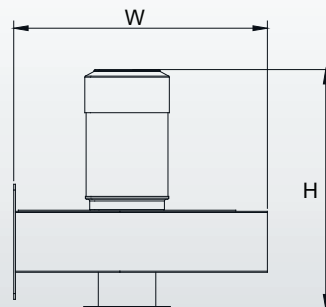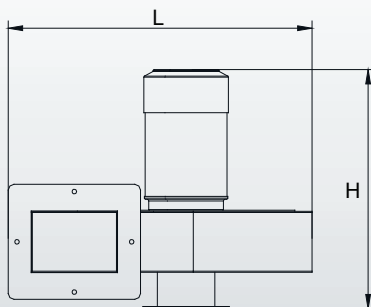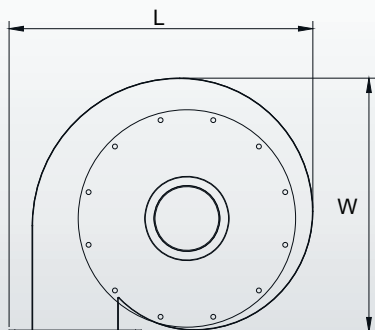

Dealer Information / Contact:



888-372-0050
 Sales@IAP-AirProducts.com
 IAP Air Products
 580 Technology Drive
 Sparta, TN 38583

SINGLE SOURCE FOR
 Fume / Welding / Dust Arms
 Ambient Air Cleaners, Mobile Welding Units
 Dust Collectors, Vehicle Exhaust, etc.
 at www.IAP-AirProducts.com