




**SKYTECH**  
PRODUCTS GROUP

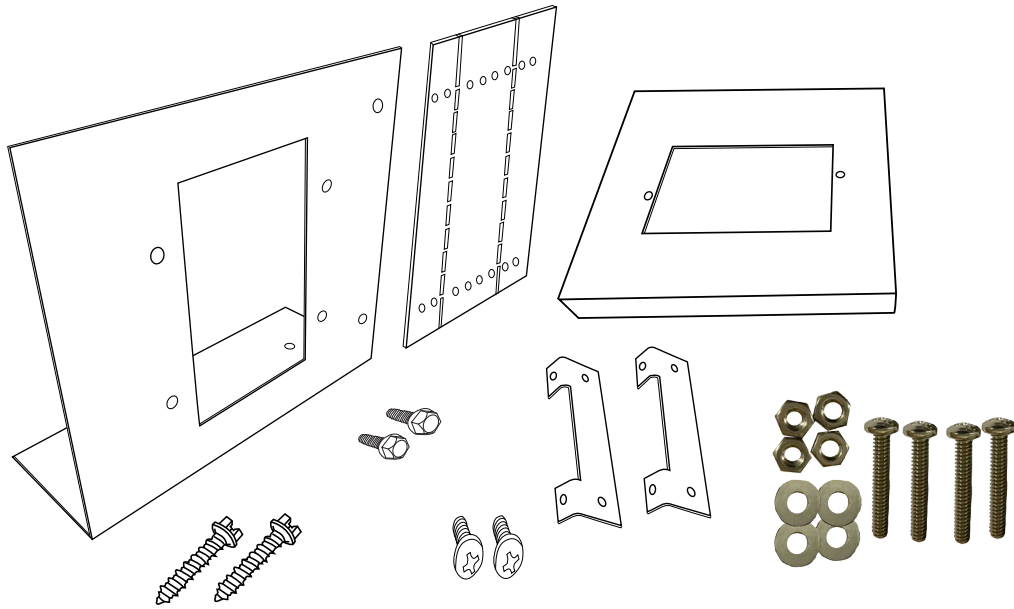

**MODEL: ESTOP-CP-KIT**

## **ESTOP1-0H Gas Timer Control Panel Kit**

For use with Outdoor Fire Pits and BBQ Grill applications

### **Installation and Operating Instructions**

**IF YOU CANNOT READ OR UNDERSTAND THESE INSTALLATION INSTRUCTIONS  
DO NOT ATTEMPT TO INSTALL OR OPERATE THIS APPLIANCE**

#### **CALIFORNIA PROPOSITION 65**



This product is designed to operate with one of the following fuel sources: Liquid Propane or Natural Gas. The fuel used to operate this product, and the products of combustion of such fuel, can expose you to chemicals including Benzene which is known to the State of California to cause cancer, birth defects and other reproductive harm and Carbon Monoxide which is known to the State of California to cause birth defects or other reproductive harm.  
(For more information go to: [www.p65Warnings.ca.gov](http://www.p65Warnings.ca.gov))



**Warning: For Outdoor Use Only**



We recommend that our gas hearth products be installed and serviced by professionals who are certified in the U.S. by the National Fireplace Institute® (NFI) as NFI Gas Specialists.

**PLEASE RETAIN THIS MANUAL FOR FUTURE REFERENCE**


**PRODUCT DESCRIPTION:** This ESTOP-CP-KIT (control panel kit) is designed to be installed into a paver block enclosure for a match throw style fire pit or a BBQ grill application. Use either the ESTOP1-0H gas timer with this kit. **The ESTOP Gas Timer is not supplied with this kit and must be purchased seperately.** The ESTOP1-0H gas timer **must** be oriented in the upright position as shown in the instructions. **NOTE:** All gas lines **must** enter from the back side of the gas timer to use this mounting kit. Ensure you install the plugs provided with the gas timer and seal them with gas rated Teflon tape before installing the kit.

**FOLLOW LOCAL CODES IF APPLICABLE FOR THIS INSTALLATION**

## INSTALLING THE CONTROL PANEL KIT


**Tools Needed:** Power Screwdriver with a Phillips head tip,  $\frac{5}{16}$ " wrench, nut driver or hex head tip,  $\frac{3}{16}$ " concrete drill bit and power drill.

**Step 1:** Use the four (4) screws provided in the ESTOP1-0H gas timer box and install the two (2) mounting brackets to each side of the gas timer as shown in Fig. 1.

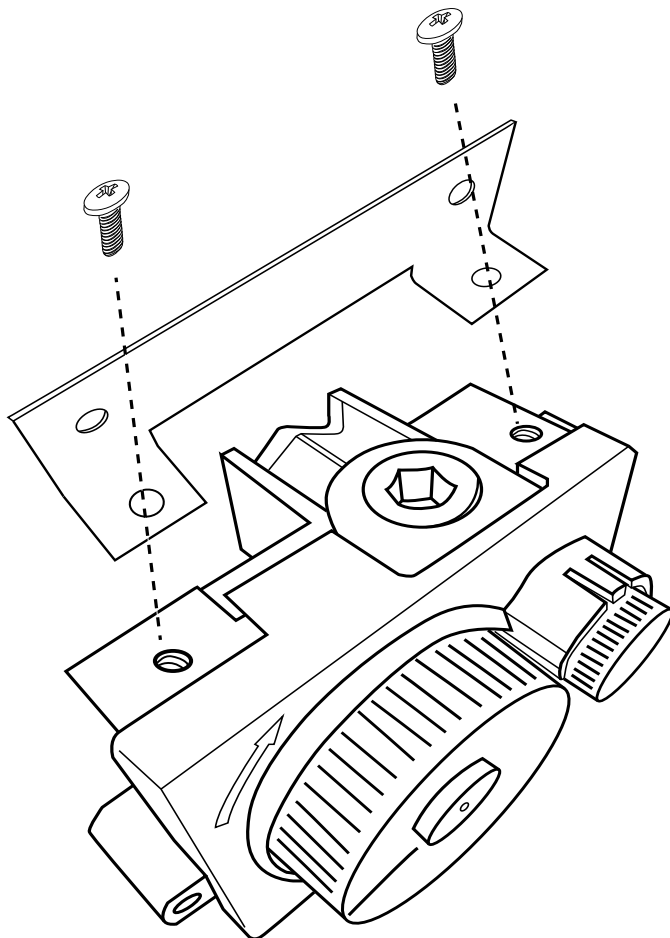


**Fig. 1** Installing mounting brackets to gas timer.

**Step 2:** After brackets are installed, the gas timer should look like Fig. 2.

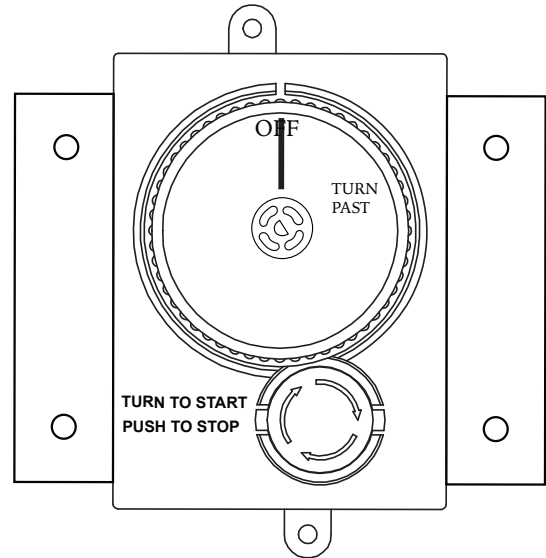

**Fig. 2** Shows front view of gas timer with mounting brackets installed.

**Step 3:** Install the (4) 10-24 x 1.25" Phillips screws through the mounting brackets, into the paver bracket holes and secure with a washer and nut (on back side) for each hole. See Figs. 3 and 4.

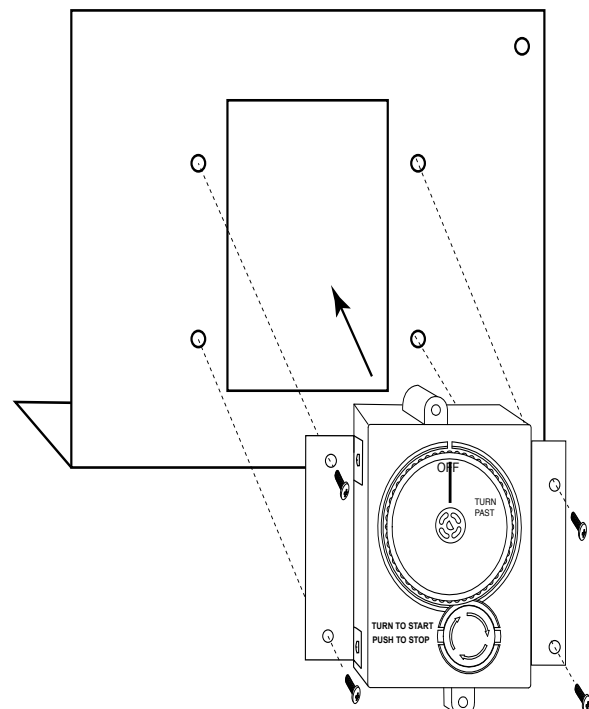

**Fig. 3** Shows gas timer mounted into paver bracket.

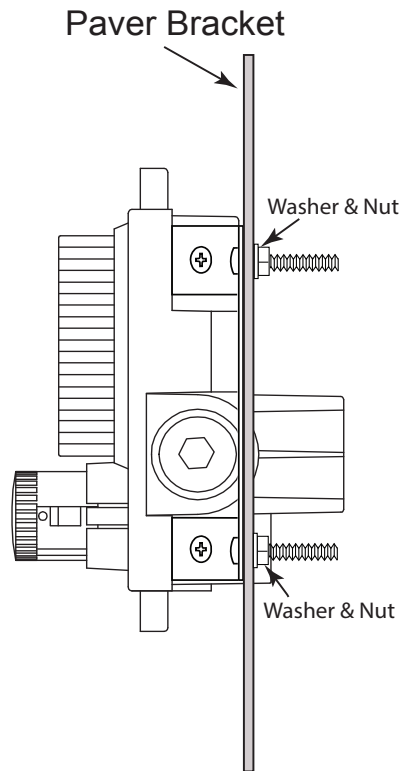


Fig. 4 Side view of gas timer mounted to paver bracket.

**Step 4:** Before installing the paver bracket into the enclosure determine a suitable location for convenient operation for the gas timer.

The paver bracket is designed to be mounted in a paver block enclosure by removing one or two pavers, setting the paver bracket into place then drilling two  $\frac{3}{16}$ " holes and securing it into place with two concrete screws.

After drilling the  $\frac{3}{16}$ " holes use the masonry screws (provided) to secure the paver bracket into place.

The paver bracket extension installs behind the paver bracket lip and is secured with the two hex head  $\frac{5}{16}$ " screws; one screw at top and one on the bottom. See Figs. 5 and 6. It is used to fill the gap next to the paver bracket for a complete finished look. In some applications the extension is not needed and can be discarded.

Place the lintel across back side of the paver block after you have secured the paver bracket to support your next row of blocks. See the shaded area in Fig. 5 showing the placement of the lintel. Securing the lintel with some type of adhesive is optional.

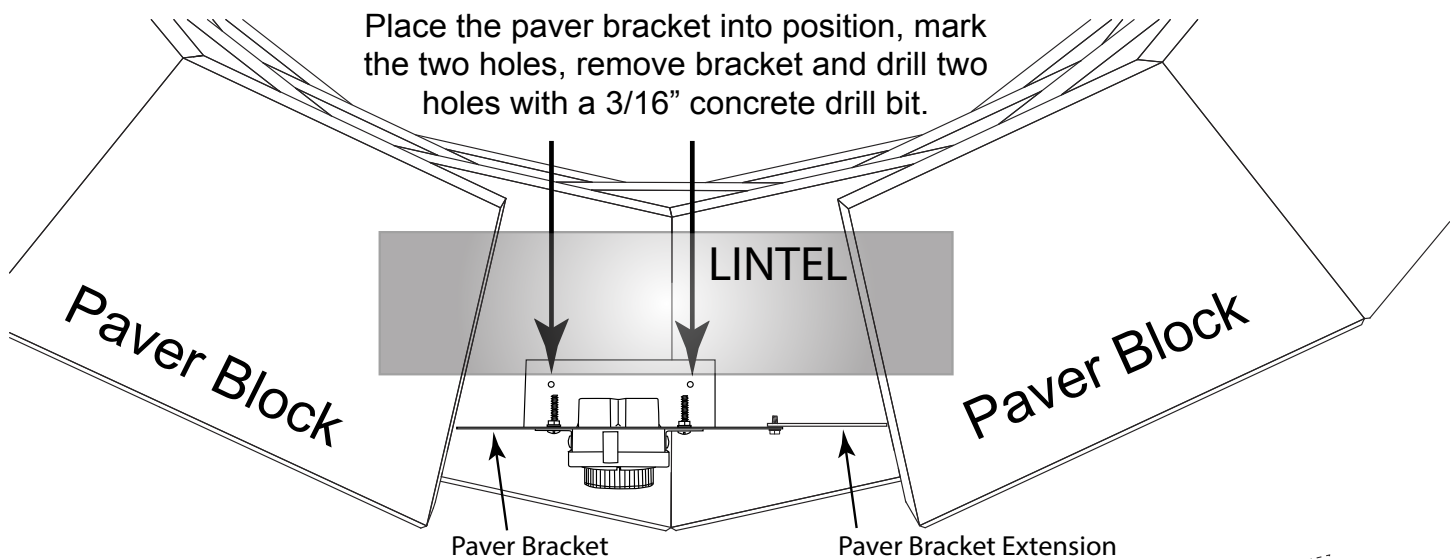


Fig. 5 Shows mounting paver bracket into place on paver block.

**Step 5:** The paver bracket extension can be used to extend the bracket from 8 inches wide up to  $11\frac{3}{4}$ " wide if necessary. The holes in the bracket extension allow for  $\frac{1}{2}$ " increments for width adjustment. Figs. 5 and 6 show the extension in the properly oriented position. If the extension bracket mounts behind the paver bracket with two  $\frac{5}{16}$ " hex screws. If it is too wide, there are perforated areas that allow you to bend and break off if the entire width is not needed.


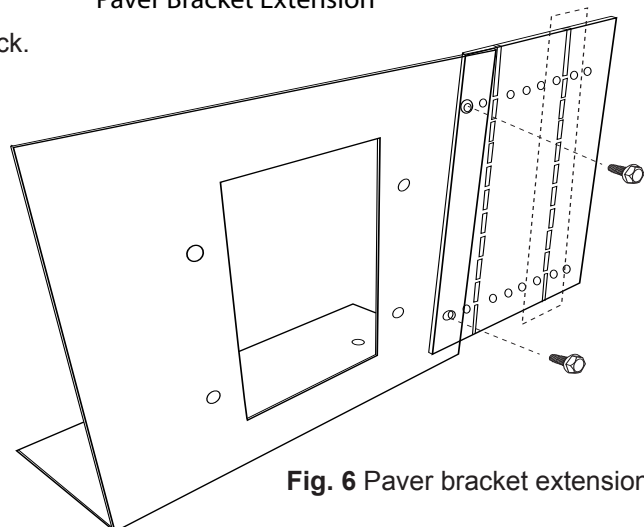


Fig. 6 Paver bracket extension.


**Step 6:** Install the cover plate overtop of the ESTOP gas timer. Align the holes in the cover plate with the holes in the ESTOP1-0H gas timer (top and bottom) and install the two (2) mounting screws (#10-24 x 6.25" SS Phillips screws) secure the cover plate as shown in Figs. 6 and 7.

**Step 8:** After the ESTOP-CP-KIT is installed then use gas rated Teflon tape on the gas lines to connect gas supply. Ensure you check for gas leaks before final operation.

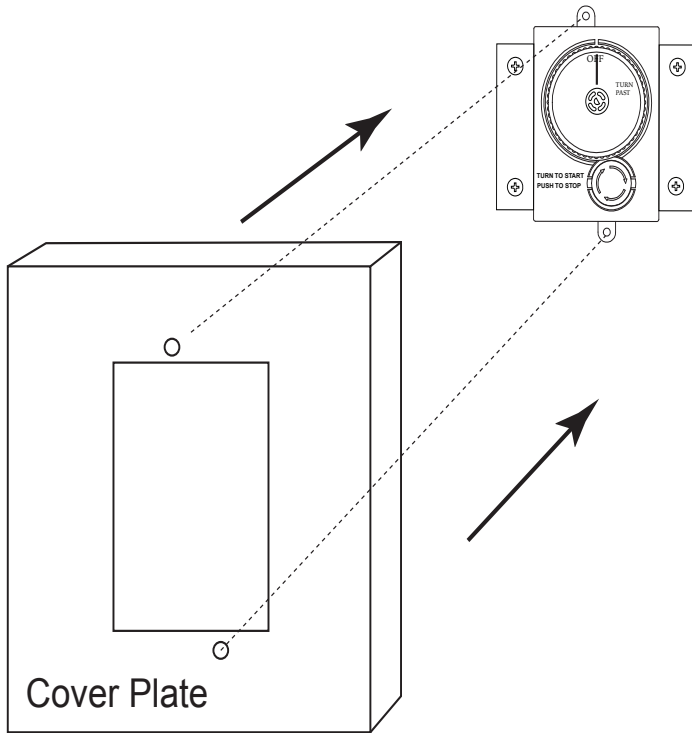


**Fig. 7** Installing cover plate.

**Step 7:** When cover plate is installed over the gas timer it will protrude  $\frac{7}{8}$ ". See Fig. 7 for outside dimensions.

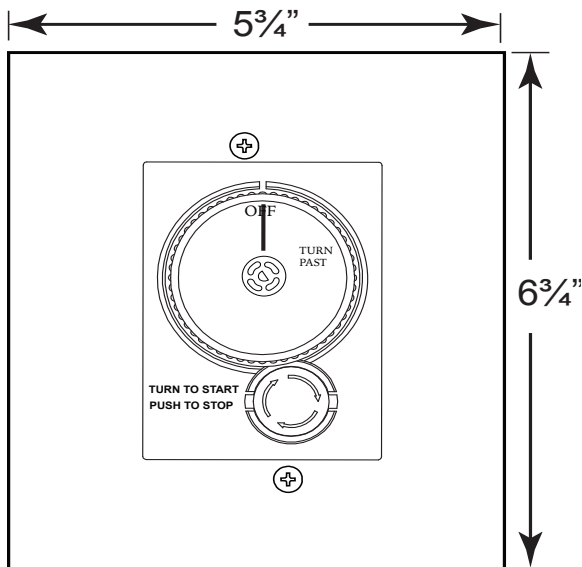

**Fig.8** Cover plate outer dimensions.

## REPLACEMENT PARTS

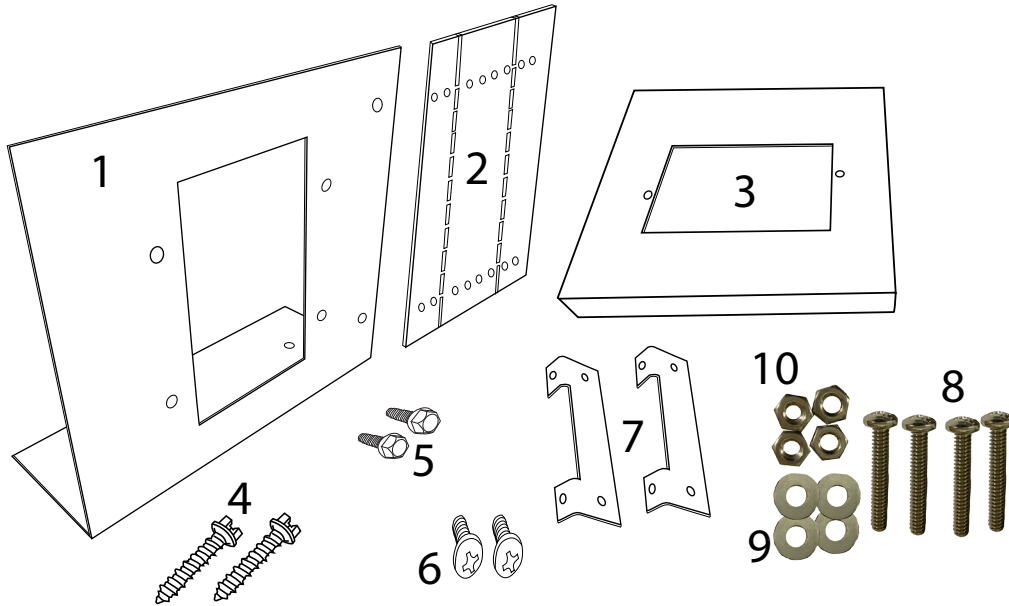

### REPLACEMENT PARTS LIST

	Description	Part Number	Qty.
1	ESTOP Paver Bracket	ESTOP-PAVER-BRKT	1
2	ESTOP Paver Bracket Extension	ESTOP-PAVER-EXT	1
3	Cover Plate Stainless	ESTOP-COVER-PLATE	1
4	1/4" x 1 1/4" Masonry Hex Screw	SCREW.25MASONRY	2
5	#10-24x1/2" Screw	ST3-113-1028	2
6	#10-24X6.25 Phil SS Panhead Blt	ST3-113-1019	2
7	Stainless Mounting Brackets	ESTOP-RECESS-BRKT	2
8	10-24x 1 1/4" Phillips Pan Screw SS	SCREW1024PANSS	4
9	#10 Stainless Washers	WASHER10SS	4
10	10-24 Stainless Nuts	ST3-113-1020	4
11	3"x12" Metal lintel support (not shown)	PAVER-LINTEL	1

**FOR TECHNICAL SERVICE, CALL:**

**U.S. INQUIRIES**  
(855) 498-8324 or (260) 459-1703

**CANADIAN INQUIRIES**  
(877) 472-3923

Skytech Products Group  
9230 Conservation Way  
Fort Wayne, IN 46809  
Sales Support: (888) 699-6167  
Website: [www.skytechpg.com](http://www.skytechpg.com)

**MANUFACTURED EXCLUSIVELY FOR SKYTECH II, INC**



## LIMITED WARRANTY

1. **Limited Warranty.** Skytech II, Inc. (“Skytech”) warrants that each new Skytech Control System, including all hardware, parts and components (the “System”), when used in accordance with the instructions furnished by Skytech provided with each System, shall be free in all material respects, of defects in materials and any workmanship under normal use, subject to proper installation (“Limited Warranty”). This Limited Warranty is non-transferrable and sets forth our sole and exclusive liability and the sole and exclusive remedies available in relationship to any non-conformity, defect or similar claim. This Limited Warranty only extends to the original retail purchaser of the System (the “Customer”) and expires upon any sale or transfer of the home where the System is installed by the Customer.
2. **System Sold As Is.** Subject to this Warranty and any applicable state law, each System is sold by Skytech to a Customers, limitations, reservations of rights, exclusions, and qualifications set forth on Skytech’s website, [www.skytechpg.com](http://www.skytechpg.com), all of which are considered part of the Warranty and are incorporated herein (collectively, the “Additional Terms”). Each Customer, by purchasing and/or using any System or any portion thereof, does so subject to the Warranty and the Additional Terms.
3. **Installation and Use of System.** Improper Installation, adjustment, alteration, service, or maintenance can cause property damage, personal injury, or loss of life. Thoroughly read the installation and operating instructions of this Control as well as the appliance it will be used in conjunction with as a system. If applicable, read the maintenance instructions before installing this control. This product is designed for use with an attended hearth appliance or fire feature. Adults must be present when the Control System is operating. DO NOT program or thermostatically set this Control to operate a hearth appliance or fire feature when Adults are not physically present. Furthermore, DO NOT leave the hearth appliance or fire feature burning unattended; it may cause damage or serious injury. If an Adult is going to be away from the hearth appliance or fire feature for any length of time, then the handheld/wall mount, receiver/control module and application should be in the “OFF” position.
4. **Repair or Replacement of System or Parts.** Should any System, or any hardware, components and/or parts contained therein fail due to a defect in workmanship or material provided by Skytech after the purchase of a System by a Customer, Skytech shall repair or, at its option, replace the defective System or part, hardware or component, subject to the Customer’s compliance with all terms and conditions contained herein governing service and claims under the Warranty. Skytech shall provide replacement parts at no charge for the first (5) five years of this warranty, and at market cost for the Lifetime of the product to the original Customer. Gas valve and gas valve components will be available at no charge for one (1) year. If Skytech does not have the parts for an individual model, then a comparable replacement System will be provided at no charge within the first (5) five years after purchase, and then at market cost for the Lifetime of that product to the Customer.
5. **Warranty Claims; Skytech Service.** To submit a valid claim under the Warranty (each, a “Valid Claim”), a Customer must comply with the following:
  - a) Obtain a Return Material Authorization (“RMA”) number from Skytech by calling (855) 498-8324; and
  - b) Provide written notice to a Skytech or an Authorized Dealer (“Dealer”) and provide the Name, House Address, Email Address and Telephone Number of the Customer;
  - c) Describe the System model number and nature of the defect, nonconformity, or other problem with the System;
  - d) Provide such notice within thirty (30) days of discovery of such defect, nonconformity, or problem;
  - e) Securely pack and ship the defective Skytech Product to Skytech II, Inc. ATTN: Warranty Department at 9230 Conservation, Fort Wayne, IN 46809. Customer assumes all costs and risks associated with transportation to Skytech (i) the RMA number is only valid for thirty (30) days from the date the RMA was issued, (ii) the RMA number should be clearly marked on the outside of each box being returned. Skytech may refuse shipments that DO NOT meet all of the Valid Claim requirements. Skytech is not responsible for any refused shipments or any damage caused due to shipping, whether or not it was a Valid Claim. Skytech shall be responsible for return shipment charges. Compliance with these requirements is a condition to coverage under this Limited Warranty.

Skytech may refuse any shipment(s) that does not meet all of the Valid Claim requirements. Skytech is not responsible for any refused shipments or any damage caused due to shipping, whether or not it was a Valid Claim. Skytech shall be responsible for reasonable return shipment charges for any Skytech System returned whether or not Skytech determines there is no defect with the System, reject for failure of the Customer to submit a Valid Claim, or otherwise determine is not eligible for service under the Warranty.

Upon receipt of a Valid Claim and the properly-returned System, Skytech shall, at its option, either (a) repair the System, at no charge to the Customer, or (b) replace the returned System with a new comparable System, at no charge to the Customer, or (c) provide the Customer with a refund in an amount equal to the price paid by the Customer for the defective System not including any service or labor cost associated with the installation or otherwise. Any System or

hardware, component or part repaired by Skytech hereunder, or any replacement System, hardware, component or part shall be shipped to the Customer by Skytech at Skytech's cost and the Warranty, the Additional Terms, and all other terms and conditions set forth herein shall extend to such repaired or replacement System, hardware, component or part. Skytech shall pay no refund before Skytech from the Customer receives the defective System, hardware, component and/or parts. Any obligation of Skytech under this Section 4 shall be and remain subject to Skytech's right to physically inspect the defective System, hardware, component and/or part returned to Skytech by the Customer. Some States do not allow the exclusion or limitation of incidental and consequential damages or limitation on how long an implied warranty lasts, so the above limitation may not apply to you. This warranty gives you specific rights and you may have other rights, which vary from state, province, or nation. To the extent allowable under any law, the liability of Skytech is limited to the express terms of this warranty, and Skytech expressly disclaims any and all implied warranties, including any warranties of fitness for a particular purpose or merchantability.

REV. 2-24-17



Print information and detach at dotted line and return to: Skytech Products Group, Attn. Warranty Dept.,  
9230 Conservation Way, Fort Wayne, IN 46809 Phone: (855)498-8224

**Warranty Information**

Purchase Date: \_\_\_\_\_ Model: \_\_\_\_\_

Purchased From: \_\_\_\_\_

Customer Name: \_\_\_\_\_ Phone: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ State/Prov. \_\_\_\_\_ Zip/Postal Code \_\_\_\_\_

E-mail Address: \_\_\_\_\_

***Please send a Proof of Purchase (original receipt) copy along with your warranty form.***