



CL Challenger Lifts

STANDARD LINE


AUTOMOTIVE LIFTING SOLUTIONS

VERSYMMETRIC® TECHNOLOGY

Challenger Lifts Versymmetric® technology brings flexibility to any service bay while also ensuring the safe lifting of any vehicle. Versymmetric® lift technology, established in 1992 by Challenger, combines a Symmetric and an Asymmetric lift into one!

Safely accommodating vehicles from compact cars to full-size trucks, our Versymmetric® lifts use an offset arm design that allows you to service a wide range of vehicles from the same service bay.

- Versymmetric® Technology, with a 3-Stage offset front arm design, allows for the safe symmetric lifting of trucks or asymmetric lifting of other small vehicles within the same service bay.
- DirectSPOT™ Technology, created by the Versymmetric® offset arms, **allows the user to save time spotting a short wheelbase vehicle by eliminating the struggle to re-position vehicles as is the case with most symmetrically designed lifts.**

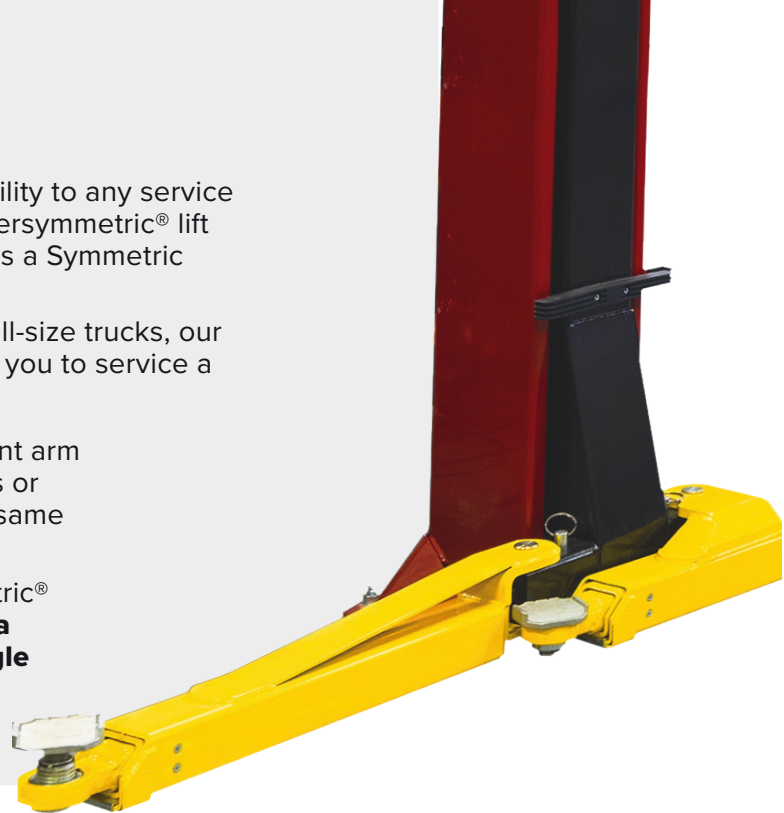

10K VERSYMMETRIC® 2-POST LIFT

MODEL # VLE10

The Challenger VLE10 brings flexibility to any service bay with 3-Stage Versymmetric® Front arms and 2-Stage Rear arms. The 11' 11⁷/₈" column height fits in shops with 12' ceilings.

Double telescoping screw pads, jacketed pulley-less single-point mechanical lock release, and rubber door guards all come standard.

Optional height extension, VLE10EH2, gives an overall height of 13' 11" for more technician headroom.

REQUIREMENTS

12' MINIMUM

14' RECOMMENDED

24' RECOMMENDED

208-230V, 1PH, 20A

SPECIFICATIONS

MODEL NUMBER	VLE10
Lift Configuration	Versymmetric®
Rise Height	74¾"
Overall Height	11' 11 ⁷ / ₈ "
Overall Width	10' 11 ⁵ / ₈ "
Drive Thru Clearance	8' 2 ³ / ₈ "
Floor to Overhead Switch	Standard 11' 5"
Front Arm Reach	Min 22 ⁵ / ₁₆ " Max 39 ³ / ₈ "
Rear Arm Reach	Min 38 ³ / ₈ " Max 55 ³ / ₈ "
Screw Pad Height	Min 4¼" Max 6¾"
Required Ceiling Height	Standard 12'
Height Extension Part # VLE10EH2	13' 11 ⁷ / ₈ "
ALI® Certified	



MODEL # VLE10

10K 2-POST LIFT

MODEL # SA10

Challenger Lifts 10,000 lbs. 2-Post lift, the SA10, features the ability to be installed in either a symmetric or an asymmetric (turn column) configuration to suit the service requirements of your particular shop.

Features **3-Stage front arms** with maximum extension and retraction, ensuring safe and reliable lifting on all vehicles within rated capacity.

With adjustable height and width options, double telescoping screw pads, durable powder coat finish, plated arm restraints and pins, **the SA10 will accommodate the demands of any full-service facility.**

REQUIREMENTS

-  **12' MINIMUM**
-  **14' RECOMMENDED**
-  **24' RECOMMENDED**
-  **208-230V, 1PH, 20A**

AVAILABLE COLORS



MODEL # SA10

SPECIFICATIONS

MODEL NUMBER	SA10			
Lift Configuration	Symmetric	Symmetric w/ 2' ext SA10EH2	Asymmetric	Asymmetric w/ 2' ext SA10EH2
Rise Height	74½"			
Overall Height	11' 10½"	13' 10½"	11' 10½"	13' 10½"
Overall Width	10' 9" or 11' 3"		10' 11½" or 11' 5½"	
Drive Thru Clearance	7' 8¾" or 8' 2¾"		7' 4½" or 7' 10½"	
Floor to Overhead Switch	10' 11⅞" / 11' 5⅞"	12' 11⅞" / 13' 5⅞"	10' 11⅞" / 11' 5⅞"	12' 11⅞" / 13' 5⅞"
Front Arm Reach	Min 22⅜" Max 41½"			
Rear Arm Reach	Min 38¼" Max 59"			
Screw Pad Height	Min 4¾" Max 6⅞"			
Rise Time	44s			
Required Ceiling Height	12'	14'	12'	14'
ALI® Certified				

9K OPEN-TOP LIFT

MODEL #CLFP9

The Challenger CLFP9 9,000 lbs. capacity 2-post lift boasts standard 3-stage front and rear arms that offer maximum sweep, arm retraction, and reach.

Our open-top design allows accommodation of any vehicle height, making it a great addition to the home enthusiast garage and professional vehicle service shops.



SPECIFICATIONS

MODEL NUMBER	CLFP9
Rise Height	6' 6 ¹ / ₈ "
Overall Height	10' 7 ⁷ / ₈ "
Overall Width	11' 5 ¹ / ₂ "
Drive Thru Clearance	8' 2 ³ / ₁₆ "
Front Arm Reach	Min 24 ¹ / ₂ " Max 44 ¹ / ₂ "
Rear Arm Reach	Min 24 ¹ / ₂ " Max 44 ¹ / ₂ "
Screw Pad Height	Min 4" Max 5 ⁷ / ₈ "
Rise Time	50s
Required Ceiling Height	10' 1 ⁷ / ₈ "

REQUIREMENTS

-  10' 2" MINIMUM
-  14' RECOMMENDED
-  24' RECOMMENDED
-  208-230V, 1PH, 20A

HEAVY-DUTY 2-POST LIFTS

MODEL # LE12-3S

The Challenger LE12-3S (12K) and E15 (15K) are the perfect economic 2-Post lifts for servicing trucks and other vehicles.

Heavy-duty 3-Stage front and rear arms offer symmetric lifting capability. **Also, adjustable column height accommodates higher profile vehicles while providing ample servicing headroom.**

Optional height extension, K2P12EH2-, provides more technician headroom.



MODEL # LE12-3S

AVAILABLE COLORS



SPECIFICATIONS

MODEL NUMBER	LE12-3S	E15
Lifting Capacity	12,000 lbs.	15,000 lbs.
Rise Height	6' 5 $\frac{3}{4}$ "	
Overall Height	13' 10" / 14' 7"	14' 6" / 16' 6"
Overall Width	11' 7 $\frac{3}{4}$ "	12' 3 $\frac{1}{16}$ "
Drive Thru Clearance	8' 7"	9' 1 $\frac{3}{8}$ "
Floor to Overhead Switch	13' 3 $\frac{1}{2}$ " / 14' 1 $\frac{1}{2}$ "	13' 10" / 15' 10"
Front Arm Reach	Min 27 $\frac{1}{2}$ " Max 54 $\frac{1}{2}$ "	Min 36 $\frac{1}{2}$ " Max 55"
Rear Arm Reach	Min 27 $\frac{1}{2}$ " Max 54 $\frac{1}{2}$ "	Min 36 $\frac{1}{2}$ " Max 55"
Screw Pad Height	Min 5 $\frac{1}{4}$ " Max 6 $\frac{3}{4}$ "	
Rise Time	61s	75s
Required Ceiling Height	13' 11" / 14' 8"	14' 7" / 16' 7"
Height Ext. Part # K2P12EH2	15' 10" / 16' 7"	No
ALI® Certified		

REQUIREMENTS

- 14' (12K) / 14' 7" (15K) MINIMUM**
- 14' (12K) / 15' (15K) RECOMMENDED**
- 24' (12K) / 28' (15K) RECOMMENDED**
- 208-230V, 1PH, 20A**

EFFICIENCY UPGRADES & SHOP EQUIPMENT



LIGHT BAR KIT

PART # EAK0361V64A-US

These super bright, 27"-long LED lights feature motion detection, 360° rotating ends, and strong magnets to illuminate your workspace in many different areas in your shop.



TIRE TOOL CENTER

PART # B99700

Saves space by allowing technicians to mount tools directly to the column, quickly within reach. Includes regulated air at lift for convenience.



AIR & ELECTRIC WORKSTATION

PART # B10264A

Provides electricity and air, mounted directly to the lift column for ultimate convenience for technicians.



7K TURF RAIL

PART # TR07

Features a 3 $\frac{1}{4}$ " drive-over height, will pick up turf and all-terrain equipment, with wheelbases ranging from 26" to 116" and a max tire diameter of 50".

COMPATIBLE WITH:
CL10, CL12, CL16



ACCESSORY CART

PART # ACC-CART-PKG

Organized, mobile storage that speeds setup, reduces downtime, and supports efficient bay flow.



3.3K LIFT TABLE

PART # BT3300

Features an adjustable and tilting (6°) top surface to safely remove and install electric vehicle batteries and battery packs.



6K FLOOR JACK

PART # CLHM-FSJ-60Q

6K lbs. capacity, double-plunger design for quicker lift and longer stroke.



HI-RISE TRANSMISSION JACK

PART # CLHM-HTCJ-1000

1K lbs. capacity, four quick-ratcheting brackets.



4K TRIPOD STAND

PART # TP4000

Provides additional stability for vehicles when needed. 4K capacity

FOOTPADS & ADAPTERS

Our telescoping screw pads provide simple access to vehicle lift points by screwing up or down to ensure level lifting.*



UNIVERSAL FOOTPAD

Part # B2270 (Sold individually)

Premium double-telescoping polyurethane screw pads, standard for our 10,000 lbs. capacity 2-Post and inground lifts, used to lift most standard cars and trucks without having to change pads.

Pad Replacement: # A1104-H



ELECTRIC VEHICLE FOOTPAD KIT

Part # EVFPK (Sold in sets of 4)

Designed to support select electric vehicles, fits most Challenger 2-Post Lifts.

Pad Replacement: # B2270G-02



GM® TRUCK FOOTPAD SET

Part # B2280PR (Sold in pairs)

Extra-wide, heavy-duty polyurethane footpads designed for '19+ model GM® half-ton trucks, including Chevrolet®, GMC®, and Cadillac®.

Pad Replacement: # B2280-01



CAB-OFF FOOTPAD KIT

Part # B2290 (Sold in sets of 4)

Designed to safely lift cabs off truck frames with pads that feature a u-channel to cradle the pinch welds.

Pad Replacement: # B2290-01

*FOOTPADS & ADAPTERS COMPATIBLE WITH CL SERIES 10-16K 2-POST LIFTS

**B2270 ONLY COMPATIBLE WITH CL SERIES 10K 2-POST LIFTS

***EVFPK NOT COMPATIBLE WITH CL16 MODELS

STACK ADAPTERS

Drop-in style stack adapters help reach pickup points on vehicles with running boards or side steps. Lift out the screw pad, drop in the stack adapter extension and replace the screw pad to reach lifting points.



3" STACK ADAPTER

PART # B2206-3
Sold individually.




6" STACK ADAPTERS

PART # 10313
Sold in pairs.



ORGANIZER RACK

PART # 10316
Sold in pairs.



STACK ADAPTER KIT

PART # 10315
(4) 3" Stack Adapters
(2) 6" Stack Adapters
(2) Organizer Racks

INCLUDED WITH ALL CL12 & CL16 LIFTS, ALSO SOLD SEPARATELY.



1" SPACERS

PART # EVBR-10
Sold in sets of 4.

1.5" SPACERS

PART # EVBR-15
Sold in sets of 4.

RUBBER BLOCK SPACER KIT FOR B2270 & EVFPK



SPRINTER KIT

PART # 10333
(2) Cradle Adapters
(2) Pin Adapters

14K 4-POST LIFT

MODEL # 4P14EFX & 4P14XFX

The Challenger 14,000 lbs. closed-front, drive-on 4-Post lift features a **low approach angle and wide runways**. We designed the 4P14 for dependability, with louvered approach ramps that provide traction even in wet conditions.

Choose between two lengths, standard (4P14EFX) or extended (4P14XFX), and a range of optional accessories like rolling jacks or our bolt-on alignment kit.



SPECIFICATIONS

MODEL NUMBER	4P14EFX	4P14XFX
Rise Height	6' 6"	
Overall Length	20' 5¾"	22' 9¼"
Overall Width	10' 10¾"	
Inside Columns	9' 8"	
Between Columns	16' 4"	18' 7½"
Height of Columns	7' 6½"	
Width of Runways	20"	
Height of Runways	7¼"	
Width Between Runways	40" / 43"	
Air Supply Req.	90-120 psi	
Rise Time	75s	
Min. Bay Size	14' x 25'	12' x 28'
ALI® Certified	✓	

REQUIREMENTS

-  **78" RISE + VEHICLE**
-  **14' RECOMMENDED**
-  **28' XFX / 24' EFX**
-  **208-230V, 1PH, 20A**
-  **90-120 PSI**

4-POST UPGRADES

Rolling jacks are a great addition to any auto repair shop or garage looking to take full advantage of our 4-Post lifts. **Eliminate the need to use manual and awkward bottle jacks and install a pair of rolling jacks.**

These jacks roll easily along the accessory rail and include extendable widths and adapters to ensure you can reach vehicle pick-up points.

- Low-profile, adjustable height allows for an unobstructed workspace when not in use
- Two-hand use ensures technician safety

ROLLING JACKS

PART NUMBER	DESCRIPTION
RJ7.5	Air / hydraulic operated rolling jack - adjustable width, 7,500 lbs. capacity



ADAPTER KITS

PART NUMBER	DESCRIPTION
10333-RJ	Sprinter® Adapter Kit
10355-6	Pair of 6" stack extensions
10355-9	Pair of 9" stack extensions

AIRLINE KITS

PART NUMBER	DESCRIPTION
40230-E	Optional airline kit for 4P14EFX
40230-X	Optional airline kit for 4P14XFX

*Airline Kits for use with two (2) RJ7.5 Rolling Jacks

RAMP KITS

PART NUMBER	DESCRIPTION
10266	36" Louvered ramp kit
10266L	52" Extended or Low Profile Ramp Kit

ALIGNMENT KITS

PART NUMBER	DESCRIPTION
40200-3D	Bolt-on alignment kit without turn plates - 3D alignment compatible
40200-3DBK	Bolt-on alignment kit with black powder coated turn plates - 3D alignment compatible
40200-3DSS	Bolt-on alignment kit with stainless steel turn plates - 3D alignment compatible

10K SHORT-RISE LIFT

MODEL # SRM10

With a brake and express tire service specialty, this low-rise 10,000 lbs. lift has a surprisingly small footprint for all its capabilities. While lifting small passenger cars to light trucks, **the lift's louvered approach ramps will bring better traction while spotting vehicles.**

Standard spotting blocks and optional auxiliary adapters reach a more comprehensive range of vehicle lift points. Flush- and Surface-mount options are available.

HOSE COVERS INCLUDED

REQUIREMENTS

- 10' MINIMUM
- 12' RECOMMENDED
- 24' RECOMMENDED
- 115V, 1PH, 20A



AVAILABLE
COLOR




MODEL # SRM10

SPECIFICATIONS

MODEL NUMBER	SRM10
Rise Height	22"
Overall Length	92 ⁷ / ₈ "
Overall Width	85" (+2 ¹ / ₂ " for handle)
Outside Width of Platforms	72"
Width Between Platforms	23"
Overall Platform Length	50"
Overall Ramp and Platform Length	82 ¹ / ₂ "
Low Adapter Position	4 ³ / ₄ "
High Adapter Position	6 ³ / ₄ "
Locking Bar Heights	13 ³ / ₄ ", 18 ¹ / ₄ ", 21 ¹ / ₄ "
Rearward Movement	13 ¹ / ₄ "
Standard Motor/Voltage	1HP, 115v, 60Hz, 1 Ph
ALI® Certified	

*HOSE COVERS INCLUDED

STANDARD ADAPTERS

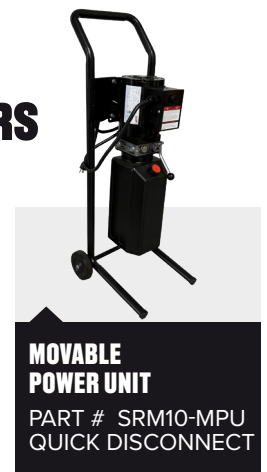

OPTIONAL SPOTTING BLOCKS



6K PORTABLE MID-RISE LIFT

MODEL # MR6

This 6,000 lbs. lift saves valuable shop space while lifting small passenger cars to light-duty trucks for brake and tire service.

Reach a more comprehensive range of vehicle lift points with included auxiliary adapters.

Additional features include a rotating arm design with rubber pads and a low drive-over clearance.

REQUIREMENTS



12' MINIMUM



12' RECOMMENDED



24' RECOMMENDED



115V, 1PH, 20A



SPECIFICATIONS

MODEL NUMBER	MR6
Rise Height	53"
Overall Length	99 $\frac{7}{16}$ "
Overall Width	40"
Min. Collapsed Table Height	5 $\frac{1}{2}$ "
Pad Height	Min. 7 $\frac{1}{4}$ " Max 61"
Hydraulic Hose	144"
Safety Lock Positions	6
Standard Motor/Voltage	1HP, 115v, 60Hz, 1 Ph
Rise Time	45s
Min. Required Bay Size	10' x 22'

STANDARD ADAPTERS



3" EXTENSION BASE

PART # TYJ3-05-02
SET OF 4.



7" EXTENSION BASE

PART # TYJ3-05-02G
SET OF 4.

7K & 9K HOME STORAGE LIFTS

MODEL # CL4P7, CL4P9S, CL4P9X & CL4P9W

Challenger ALI® Certified, professional-grade, home enthusiast lifts with multiple lock positions and 7,000 or 9,000 lbs. capacity allow storing and servicing your vehicles efficiently.



MODEL # CL4P9S

The **80" under-runway clearance on the X and W models will enable you to store most full-size vehicles underneath for everyday use**, and our optional caster sets add portability.

Other options, including Rolling Jacks, Jack Trays, and Plastic Drip Trays, make these lifts ideally suited for light-duty service.

REQUIREMENTS

- VEHICLE HEIGHT + 7'**
- 12' RECOMMENDED**
- 24' RECOMMENDED**
- 115/230V, 1PH, 20A**
***OPTIONAL 230V POWER UNIT**



SPECIFICATIONS

MODEL NUMBER	CL4P7	CL4P9S	CL4P9X	CL4P9W
Description	Standard	Standard	Ext. Length/Height	Ext. Length/Height/Width
Lifting Capacity	7,000 lbs.	9,000 lbs.		
Length Overall	16' 3½"	17' 5½"	19' 5½"	
Width Overall	8' 4½"	9' 4¼"		10' 7¼"
Inside Columns	7' 8⅛"	7' 11"		9' 2"
Between Columns	12' 3½"	13' 4½"	15' 4¾"	
Height of Columns	6' 7½"	7' ½"	8' ½"	
Height of Runways (Floor to runway)	5¾"	7"		
Width of Runways	20"			
Width Between Runways	38"			
Rise Height (Runway at top position)	68⅞"	73¼"	85½"	
Max. Wheelbase	141½"	155"	179"	
Clearance Height	63"	67¾"	80"	
Std. Motor/Voltage	1HP/115v or 2HP/230v			
Min. Rec. Bay Size	10' x 20'	12' x 22'	11' x 24'	12' x 24'
ALI® Certified				

NO AIR REQUIRED *OPTIONAL ER (EXTENDED RAMPS) AVAILABLE FOR LOW-PROFILE VEHICLES

HOME STORAGE ACCESSORIES

PART NUMBER	DESCRIPTION
CL4P9DT-P	Plastic drip tray set (4)
Q4P09JT	4,500 lb. capacity jack tray
CL4P9ER	50" extended ramps for low-profile vehicles
CL4P9CS	Caster set (4)
Q4P09SP	Storage platform (4)
CLRJ3.5	Manual operated rolling jack - adjustable width, 3,500 lbs. capacity each
RJ4.5	Manual operated rolling jack - adjustable width, 4,500 lbs. capacity each
QRJ04-PK	Air/hydraulic pump kit for RJ4.5



CL4P9DT-P



Q4P09JY



Q4P09SP



CL4P9CS


CL4P9ER

RJ4.5



Scan here to see which
of our Home Storage
options fits your needs!

Regional Sales Managers

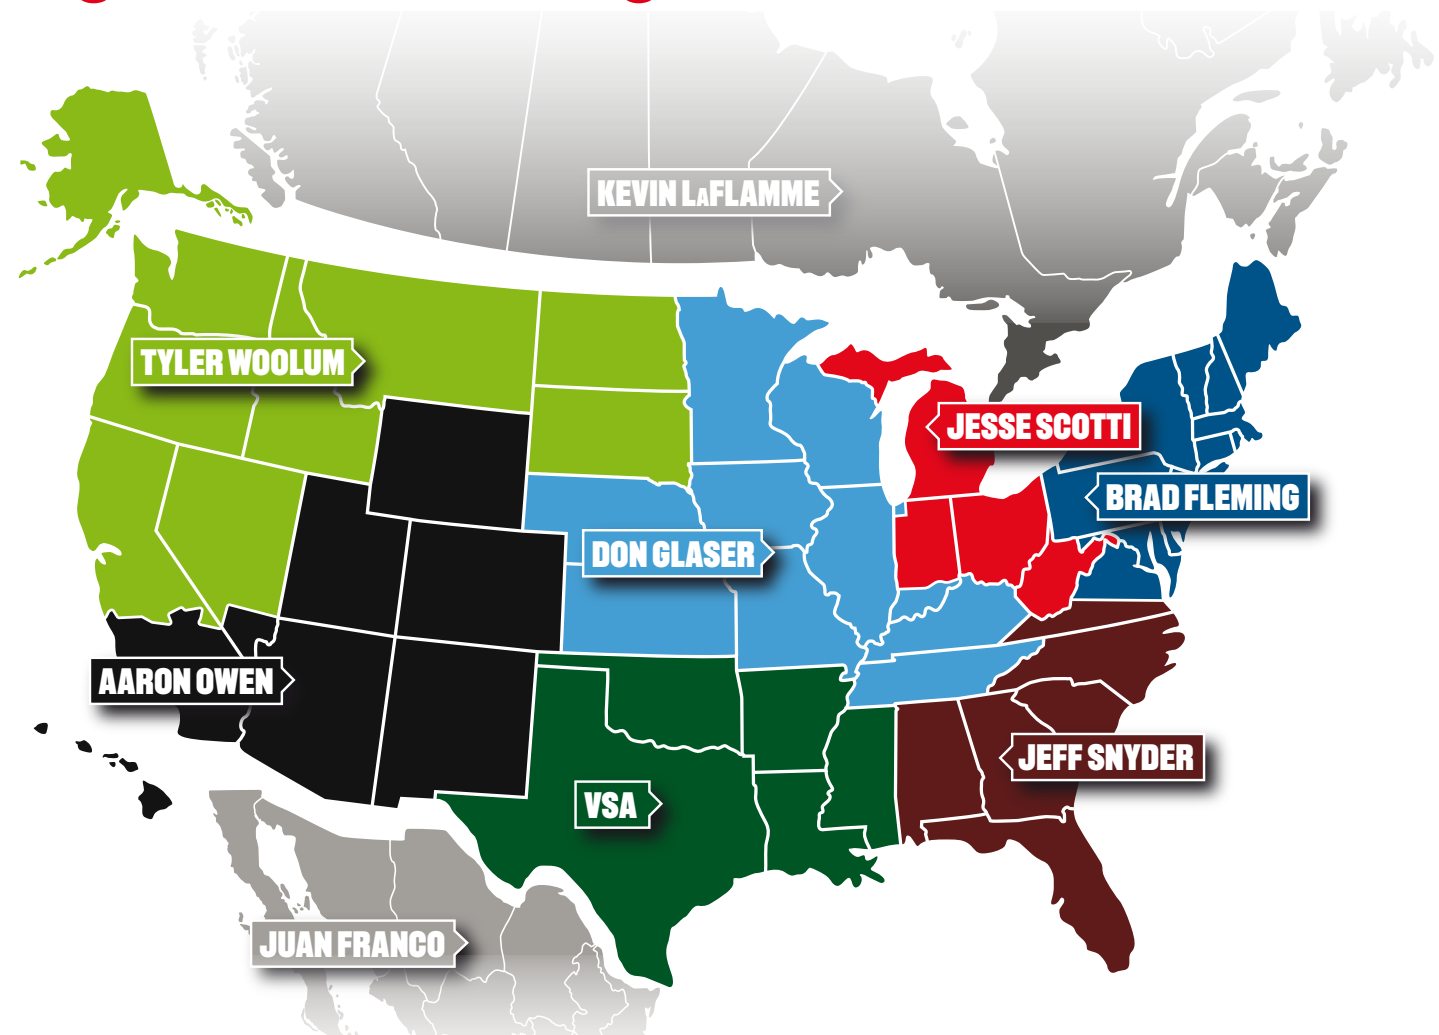

TYLER WOOLUM
408-314-2129
tylerw@challengerlifts.com



KEVIN LaFLAMME
+1 226-750-7249
kevinl@challengerlifts.com



JESSE SCOTTI
502-523-1522
jesses@challengerlifts.com



AARON OWEN
480-684-4036
aarono@challengerlifts.com



DON GLASER
847-975-7358
donaldg@challengerlifts.com



BRAD FLEMING
610-731-5267
bradleyf@challengerlifts.com



JUAN FRANCO
305-205-0940
+57 310 2481112 (COL)
office: +57 601408561 (COL)
juan.e.franco@snapon.com



VSA
214-353-0765
tcole@vsareps.com



JEFF SNYDER
770-490-8415
jsnyder@challengerlifts.com



CUSTOMER CARE & SERVICE
800-648-5438
challengerlifts@soe.freshdesk.com

CL Challenger Lifts



facebook.com/challengerlifts



instagram.com/challengerlifts




linkedin.com/company/challengerlifts



youtube.com/@challengerlifts7727



**PROUD
ALI MEMBER**

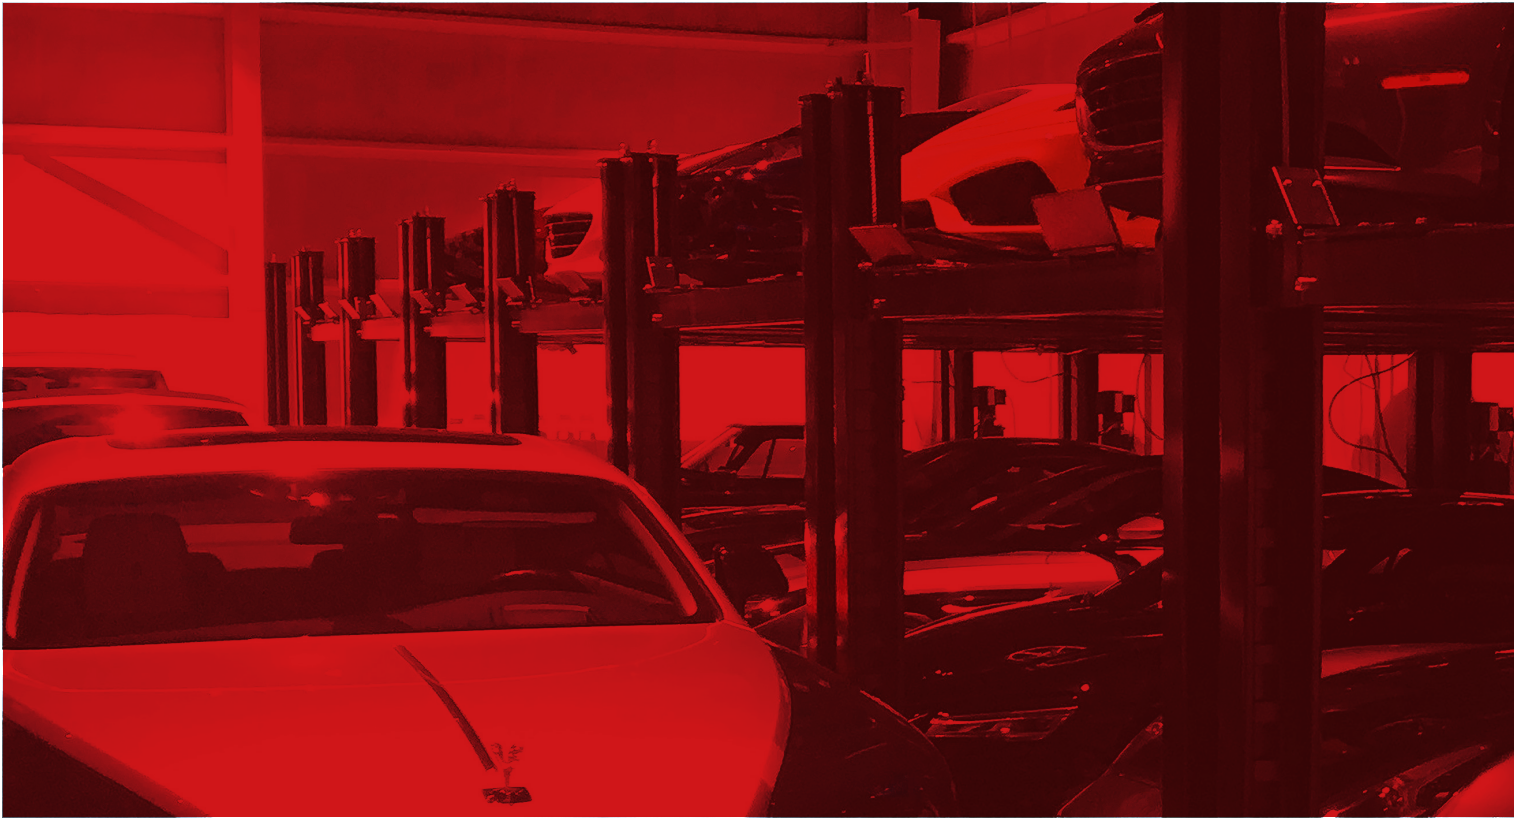

challengerlifts.com



Snap-on® Total Shop Solutions offers a wide range of garage equipment solutions for workshops, garages, car dealers and tire shops, thanks to the specific solutions provided by its portfolio of premium brands. Challenger Lifts is a brand of TSS and is committed to product innovation and improvement. Therefore, specifications listed in this sell sheet may change without notice. ©2026 Snap-on Incorporated. Challenger Lifts is a trademark, in the United States and other countries, of Snap-on Incorporated. All rights reserved. All other marks are marks of their respective holders. ssmi22434b CL-standard-line-catalog 10/2026

