

**CL Challenger Lifts**

**PRO**

**LINE**

**AUTOMOTIVE LIFTING SOLUTIONS**





# CONTACT US



[facebook.com/challengerlifts](https://facebook.com/challengerlifts)



[instagram.com/challengerlifts](https://instagram.com/challengerlifts)




[linkedin.com/company/challengerlifts](https://linkedin.com/company/challengerlifts)



[youtube.com/@challengerlifts7727](https://youtube.com/@challengerlifts7727)



# WHO IS CHALLENGER LIFTS?

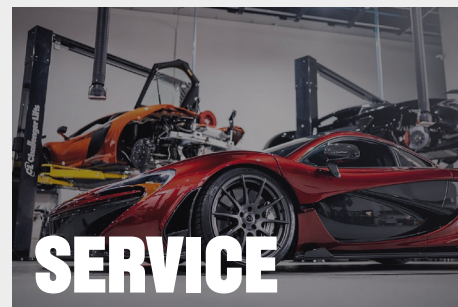

Since 1987, Challenger Lifts has been the leading innovator in the vehicle lift industry. Challenger Lifts offers a range of vehicle lifts to owners and managers of independent and original equipment manufacturer dealership service and repair shops.

We provide quality, innovative vehicle lifting products, but it's the people and processes of Challenger Lifts with Snap-on value creation process that earn its share in the automotive lift marketplace.

Our innovative product design sets us apart from the rest of the vehicle lift industry. With a commitment to innovation, quality and service, Challenger Lifts is dedicated to providing vehicle lifts that set the industry standard.





# THE CHALLENGER LIFTS DIFFERENCE.


## VERSYMMETRIC® TECHNOLOGY

Challenger Lifts Versymmetric® technology brings flexibility to any service bay while ensuring the safe lifting of any vehicle. Versymmetric® lift technology, established by Challenger in 1992, combines a Symmetric and an Asymmetric lift into one!



Versymmetric® Technology with 3-Stage offset front arm design, allows for the safe symmetric lifting of trucks or asymmetric lifting of other small vehicles within the same service bay.

DirectSPOT™ Technology, created by the Versymmetric® offset arms, **allows the user to save time spotting a short wheelbase vehicle by eliminating the struggle to re-position vehicles as is the case with most symmetrically designed lifts.**

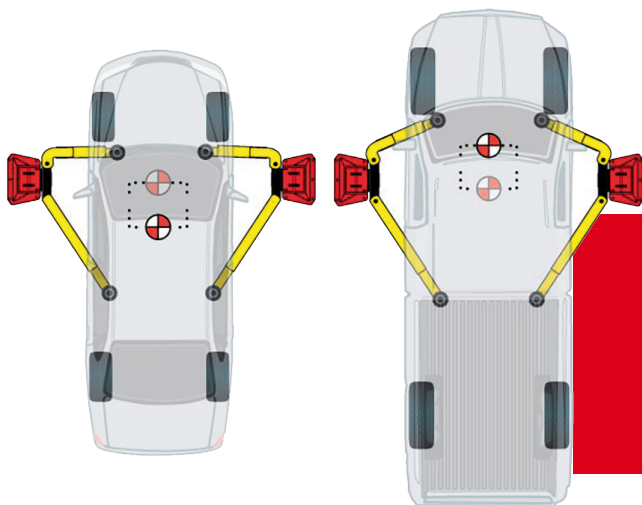

**VERSYMMETRIC® TECHNOLOGY** COMBINES THE ADVANTAGES OF ASYMMETRIC LIFTS AND SYMMETRIC LIFTS, IMPROVING THE ERGONOMICS WHEN PLACING THE ARMS TO LIFT THE CAR.

## WHY CHOOSE VERSYMMETRIC®?

**Torrent Motorworks**, a European performance & service center located in New York, needed a lift versatile enough to handle everything from Porsche® 911s to luxury SUVs. **That's why they chose the CL10V3 to outfit their shop.**

**"Its arm design helps us get cars in and out quickly, and has been operating flawlessly since day one."** - Tim S.



# 10K VERSYMMETRIC® 2-POST



MODEL # CL10AV3

FULL SPECIFICATIONS PG. 23

Shuffling vehicles around to reach the recommended lifting points is a thing of the past! Utilizing Versymmetric® technology, the CL10AV3 allows servicing many different vehicle types. **Equipped with 3-Stage directSPOT™ arms, an industry-first, the CL10AV3 will reduce spotting time and boost productivity.**

To better serve our customers' diverse lifting needs and the growing demand for Electric Vehicle service, our CL10AV3 adjustable design ensures that our customers can accommodate a wider range of vehicles, while providing your technicians with more space to work efficiently.

## REQUIREMENTS


-  **12' MINIMUM**
-  **14' RECOMMENDED**
-  **24' RECOMMENDED**
-  **208-230V, 1PH, 20A**

### NEW MODEL AVAILABLE

Designed specifically for luxury and high-performance vehicles, the new **CL10AV3-SRA** delivers enhanced versatility, efficiency, and technician confidence.

## OPTIONAL UPGRADE

**DRIVE-ON PADS**  
PART # CL10-XP9

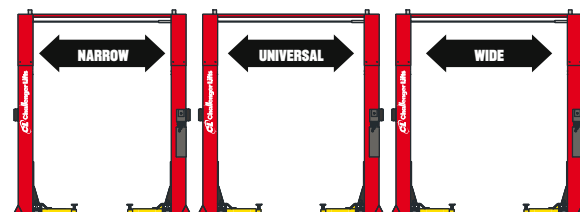

## WIDTH CONFIGURATIONS

**Narrow:** 11' 6½" Space Constraints or Express Pads configuration

**Universal:** 12' ½" Cars, SUVs, Trucks, Most Electric Vehicles

**Wide:** 12' 6½" Optimal for Cars, EVs and Luxury vehicles




INSTALLED AT WIDEST  
SETTING & EQUIPPED WITH  
EVFPK FOOTPADS

## NEW!

## EV KIT

PART # ADD "-EV" TO ANY CL10A PART NUMBER TO INCLUDE THIS KIT


Along with our adjustable 2-Post width options, our new **EV Kit** prepares you to lift all vehicles safely and correctly.

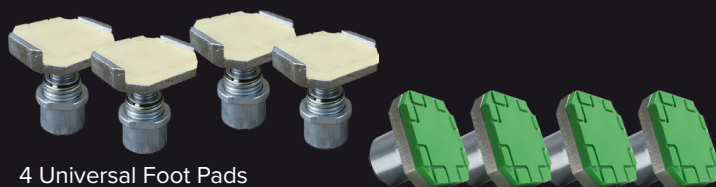

4 Universal Foot Pads

4 EVFPK Low-Profile EV-ready Foot Pads

4 3-inch Adapters  
4 6-inch Adapters  
4 Storage Racks

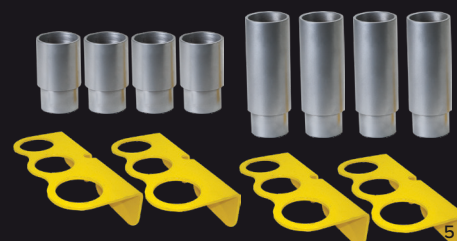



# ADJUSTABLE HEAVY DUTY LIFTS



All our HD 2-Posts come standard with the ability to adjust the width and height during installation to suit your shop's needs.

## 12K 2-POST

MODEL # CL12A FULL SPECIFICATIONS PG. 23

With its adjustable width feature and 12,000 lbs. capacity, the CL12A can accommodate a variety of vehicles, from compact cars to full-size trucks and commercial vehicles.

Spot vehicles faster thanks to the 3-Stage Arms and telescoping footpads.

## 12K LOW-CEILING 2-POST

MODEL # CL12A-LC FULL SPECIFICATIONS PG. 23

All the power of our CL12A but can be installed in shops with 12' ceilings due to a shorter column height of 11'11".

## REQUIREMENTS

- ↑ 13' 3" MINIMUM
- ↔ 14' RECOMMENDED
- ↓ 24' RECOMMENDED
- ⚡ 208-230V, 1PH, 20A

## EV SERVICE READY

INSTALLED AT WIDEST SETTING & EQUIPPED WITH EVFPK FOOTPADS



MODEL # CL12A-LC




WIDTH ADJUSTMENT FOR CL12A & CL12A-LC

**NEW!**


## EV KIT

PART # ADD "-EV" TO ANY CL12A PART NUMBER TO INCLUDE THIS KIT

Along with our adjustable 2-Post width options, our new **EV Kit** prepares you to lift all vehicles safely and correctly.



4 Universal Foot Pads



4 EVFPK Low-Profile EV-ready Foot Pads

- 4 3-inch Adapters
- 4 6-inch Adapters
- 4 Storage Racks





# UPGRADE YOUR LIFT.

## CL10 & CL12 2-POST LIFTS

The **CL10** and **CL12** 2-post lifts offer a variety of lifting capabilities. With new and improved upgrades, both lifts bring efficiency and quality to any workshop.

### EV SERVICE READY

INSTALLED AT WIDEST  
SETTING & EQUIPPED  
WITH EVFPK FOOTPADS



MODEL # CL10AV3



## SLK LIMITED HEIGHT KIT

Using the SLK Kit will allow installation at any height to keep the cylinder from protruding past the overhead, limiting the rise height to approximately 36".

Available on any CL10 or CL12 model.



## GALVANIZED ARMS UPGRADE

Protection for integrity and service.


Available on all CL10A, CL12A, and CL16 models.

## QUICKCYCLE™ UPGRADE

With the QuickCycle™ upgrade, your Challenger lift will be 2x faster than traditional automotive lifts.

Productivity will increase by allowing you to service more vehicles per bay daily.

This increase in productivity will result in an increase in annual service and parts sales.



## DUAL CONTROLS

PART # DPC

Increase productivity with Dual Pendant Controls that allow technicians to operate a lift from either column.

AVAILABLE FOR:  
CL10 SERIES, CL12A SERIES



# 16K 2-POST



MODEL # CL16-3S & CL16-2-3S

FULL SPECIFICATIONS PG. 24

This 16,000 lbs. 2-Post Lift boasts optimum flexibility and meets ALI®/ANSI® safety standards.

It features **adjustable column extensions to accommodate three settings for height**, from 13'6" to 14'6", or add 2' column extensions to go from 15'6" to 16'6".

**Standard features include 3-Stage Front and Rear Arms and low-profile arm supports for a full swing.**

## REQUIREMENTS

|  |                           |
|--|---------------------------|
|  | <b>13' 8" MINIMUM</b>     |
|  | <b>16' RECOMMENDED</b>    |
|  | <b>26' RECOMMENDED</b>    |
|  | <b>208-230V, 1PH, 30A</b> |
|  | <b>90-120 PSI</b>         |



### STACK ADAPTER KIT

PART # 10315

(4) 3" Stack Adapters

(2) 6" Stack Adapters

(2) Organizer Racks

INCLUDED WITH ALL CL12 & CL16 LIFTS, ALSO SOLD SEPARATELY.



MODEL # CL16-3S

# 20K 2-POST

MODEL # CL20 & CL20-2

FULL SPECIFICATIONS PG. 24

Engineered to be wider, taller, and more robust to tackle the heaviest vehicles in your fleet, up to 20,000 lbs.

Equipped with 2-Stage Arms, this lift also features **adjustable column extensions, adjustable width, and the ability to add optional 2' column extensions** for taller vehicles.

## REQUIREMENTS

|  |                           |
|--|---------------------------|
|  | <b>13' 8" MINIMUM</b>     |
|  | <b>16' RECOMMENDED</b>    |
|  | <b>28' RECOMMENDED</b>    |
|  | <b>208-230V, 1PH, 30A</b> |
|  | <b>90-120 PSI</b>         |



MODEL # CL20

### STACK ADAPTERS



(1) 8" Stack Adapter

PART # B12068

(1) 4" Stack Adapter

PART # B12069

INCLUDED WITH ALL CL20 LIFTS, ALSO SOLD SEPARATELY.




WIDTH ADJUSTMENT FOR CL16 & CL20



# FOOTPADS & ADAPTERS

Our telescoping screw pads provide simple access to vehicle lift points by screwing up or down to ensure level lifting.\*

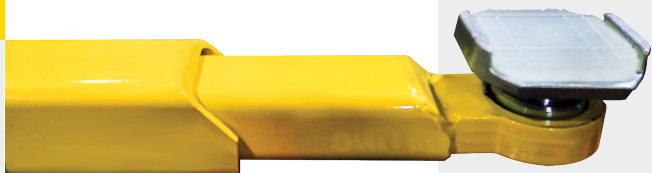

## UNIVERSAL FOOTPAD

Part # B2270 (Sold individually)

Premium double-telescoping polyurethane screw pads, standard for our 10,000 lbs. capacity 2-Post and inground lifts, used to lift most standard cars and trucks without having to change pads.

Pad Replacement: # A1104-H



## ELECTRIC VEHICLE FOOTPAD KIT



Part # EVFPK (Sold in sets of 4)

Designed to support select electric vehicles, fits most Challenger 2-Post Lifts.

Pad Replacement: # B2270G-02



## GM® TRUCK FOOTPAD SET

Part # B2280PR (Sold in pairs)

Extra-wide, heavy-duty polyurethane footpads designed for '19+ model GM® half-ton trucks, including Chevrolet®, GMC®, and Cadillac®.

Pad Replacement: # B2280-01



## CAB-OFF FOOTPAD KIT

Part # B2290 (Sold in sets of 4)

Designed to safely lift cabs off truck frames with pads that feature a u-channel to cradle the pinch welds.

Pad Replacement: # B2290-01

\*FOOTPADS & ADAPTERS COMPATIBLE WITH CL SERIES 10-16K 2-POST LIFTS

\*\*B2270 ONLY COMPATIBLE WITH CL SERIES 10K 2-POST LIFTS

\*\*\*EVFPK NOT COMPATIBLE WITH CL16 MODELS

# STACK ADAPTERS

Drop-in style stack adapters help reach pickup points on vehicles with running boards or side steps. Lift out the screw pad, drop in the stack adapter extension and replace the screw pad to reach lifting points.



## 3" STACK ADAPTER

PART # B2206-3  
Sold individually.



## 6" STACK ADAPTERS

PART # 10313  
Sold in pairs.



## ORGANIZER RACK

PART # 10316  
Sold in pairs.



## STACK ADAPTER KIT

PART # 10315  
(4) 3" Stack Adapters  
(2) 6" Stack Adapters  
(2) Organizer Racks

INCLUDED WITH ALL CL12 & CL16 LIFTS,  
ALSO SOLD SEPARATELY.



## 1" SPACERS

PART # EVRB-10  
Sold in sets of 4.

## 1.5" SPACERS

PART # EVRB-15  
Sold in sets of 4.

RUBBER BLOCK SPACER KIT FOR  
B2270 & EVFPK



## SPRINTER KIT

PART # 10333  
(2) Cradle Adapters  
(2) Pin Adapters

# EFFICIENCY UPGRADES & SHOP EQUIPMENT



## LIGHT BAR KIT

PART # EAK0361V64A-US

These super bright, 27"-long LED lights feature motion detection, 360° rotating ends, and strong magnets to illuminate your workspace in many different areas in your shop.



## TIRE TOOL CENTER

PART # B99700

Saves space by allowing technicians to mount tools directly to the column, quickly within reach. Includes regulated air at lift for convenience.



## AIR & ELECTRIC WORKSTATION

PART # B10264A

Provides electricity and air, mounted directly to the lift column for ultimate convenience for technicians.



## 7K TURF RAIL

PART # TR07

Features a 3 1/4" drive-over height, will pick up turf and all-terrain equipment, with wheelbases ranging from 26" to 116" and a max tire diameter of 50".

COMPATIBLE WITH:  
CL10, CL12, CL16



## ACCESSORY CART

PART # ACC-CART-PKG

Organized, mobile storage that speeds setup, reduces downtime, and supports efficient bay flow.



## 3.3K LIFT TABLE

PART # BT3300

Features an adjustable and tilting (6°) top surface to safely remove and install electric vehicle batteries and battery packs.



## 6K FLOOR JACK

PART # CLHM-FSJ-60Q

6K lbs. capacity, double-plunger design for quicker lift and longer stroke.



## HI-RISE TRANSMISSION JACK

PART # CLHM-HTCJ-1000

1K lbs. capacity, four quick-ratcheting brackets.



## 4K TRIPOD STAND

PART # TP4000

Provides additional stability for vehicles when needed. 4K capacity



# INGROUND LIFTS



Ingrounds are perfect for service departments. The controls can **mount into the workbenches** to provide convenience and a great aesthetic look to your shop. Our **Wide models are built to service Standard, Electric, and exotic Vehicles**, while our **Heavy-Duty models handle various fleet vehicles**.

## 10K STANDARD



MODEL # EV1020  
FULL SPECIFICATIONS PG. 25

With a small footprint and substantial capabilities, this 10,000 lbs. capacity inground lift is **ready for any professional service facility**. Expect a longer life cycle from our chrome guide tubes and non-breathing ram-style cylinders.



MODEL # EV1020

## OPTIONAL UPGRADE



**9K DRIVE-ON PADS\***  
PART # EV1020-XP9

\*9K CAPACITY9

## REQUIREMENTS



**12' MINIMUM**



**12' RECOMMENDED**



**24' RECOMMENDED**



**208-230V, 1PH, 30A**



**90-120 PSI**

## STAY DRY FEATURE

Stay Dry eliminates the risk of hydraulic fluid seeping into the ground through fully contained and sealed polymer cassette tubs. Available for EV and EW series

## 12K HEAVY-DUTY



MODEL # EV1220  
FULL SPECIFICATIONS PG. 25

Our 12,000 lbs. heavy-duty inground lift brings flexibility to any shop.

Able to handle full-sized vehicles, heavy-duty trucks, SUVs, and small sedans, the wide range of capabilities provides an ideal solution for fleet maintenance.



MODEL # EV1220

## REQUIREMENTS



**12' MINIMUM**



**12' RECOMMENDED**



**24' RECOMMENDED**



**208-230V, 1PH, 30A**



**90-120 PSI**

**NEW!**

## INGROUND EV KIT FOR EV OR EW MODELS

MODEL # 10900

Inground efficiency kit for all EV and EV inground lifts



4 EVFPK Low-Profile EV-ready Foot Pads

4 3-inch Adapters  
4 6-inch Adapters  
4 Storage Racks



# 10K & 12K WIDE



MODEL # EW10 & EW12  
FULL SPECIFICATIONS PG. 25

Our new wide inground lifts provide the **necessary drive-through clearance** for servicing wide-bodied, exotic, and electric vehicles.

3-Stage Arms allow for more efficient vehicle spotting and **90% more under-car clearance** allows easy battery removal and installation in electric vehicles.

## REQUIREMENTS

-  **12' MINIMUM**
-  **12' RECOMMENDED**
-  **24' RECOMMENDED**
-  **208-230V, 1PH, 30A**
-  **90-120 PSI**

## POWER CONTROL OPTIONS FOR EV & EW LIFTS

Standard Power Controls mount to walls and feature a single-push button lift function and down-release valve handle. **Optional Bench Mount controls are available in button and lever** and mount to workbenches, providing convenient access to lift controls.



**BENCH MOUNT**  
PART # BMC



**BENCH MOUNT LEVER**  
PART # EV-BML

## EXPAND YOUR HORIZONS.


**Save money up front and upgrade later.** We offer the option to install a standard inground, 10K or 12K (EV), in our NEW wide (EW) tub, **allowing you to upgrade to a wide inground without the expense of a retrofit installation in the future.**

### HYBRID OPTION

EH10 10K CAPACITY | EH12 12K CAPACITY



All Ingrounds feature fully-contained tubs to eliminate any potential risk of environmental impact.

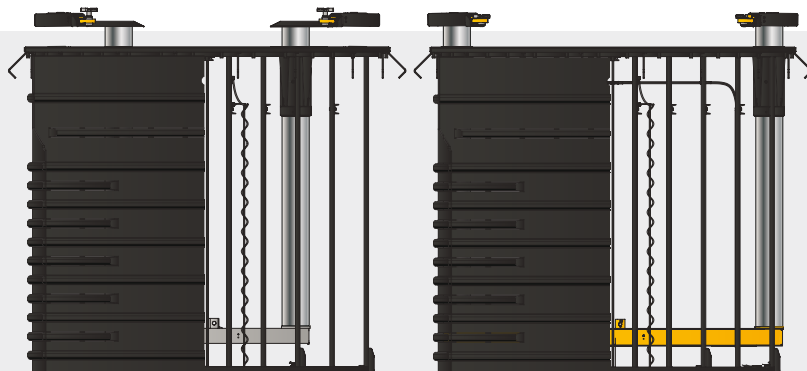



# 4-POST LIFTS

Our 4-Post Lifts deliver **everything you need to expand your shop offerings to commercial service**, with lift capacities starting at 15,000 lbs. to a maximum of 60,000 lbs.

## 15K 4-POST

MODEL # 4115

FULL SPECIFICATIONS PG. 26

Designed with productivity and safety in mind with an all-enclosed front column and crossbeam design. **The 26"-wide runways allow you to service or align a range of vehicles up to 15,000 lbs. from small passenger cars to medium-duty trucks and medium-sized vans.** Perform wheel alignment service on vehicles from 183" to 210" in wheelbase.

OPEN OR CLOSED FRONT GENERAL SERVICE AND ALIGNMENT MODELS AVAILABLE.

ALIGNMENT MODEL #

AR4115EAX AR4115XAX  
AR4115EAO AR4115XAO

## REQUIREMENTS

|                                                                                     |                           |
|-------------------------------------------------------------------------------------|---------------------------|
|  | <b>78" +VEHICLE</b>       |
|  | <b>14' RECOMMENDED</b>    |
|  | <b>24' RECOMMENDED</b>    |
|  | <b>208-230V, 1PH, 30A</b> |
|  | <b>90-120 PSI</b>         |

## 18K HEAVY-DUTY 4-POST

MODEL # 4018XFX

FULL SPECIFICATIONS PG. 27

This **ALI® Certified** Flat Deck 4-Post Lift is a perfect fit for shops servicing vehicles up to 18,000 lbs.

It features a **proven cable design, single-point mechanical lock release, and 24" wide runways.**

ALIGNMENT RACK UPGRADE **NOT AVAILABLE** FOR 4018XFX

## REQUIREMENTS

|                                                                                     |                           |
|-------------------------------------------------------------------------------------|---------------------------|
|  | <b>78" +VEHICLE</b>       |
|  | <b>14' RECOMMENDED</b>    |
|  | <b>24' RECOMMENDED</b>    |
|  | <b>208-230V, 1PH, 30A</b> |

**26" WIDE RUNWAY DECKS FOR DUAL-WHEEL VEHICLES**



MODEL # AR4115EAO

Upgrade the runways, jack rails, turn plate pockets & slip plate pockets with galvanized coating to extend the life of your 4115 Lift.

**GALVANIZED COATING UPGRADE**



MODEL # 4018XFX

## UPGRADE

MODEL # 4018XFX-PKG

Comes with (2) 9K Rolling Jacks w/18K Airline Kit



# 18K HEAVY-DUTY 4-POST

MODEL # 44018

FULL SPECIFICATIONS PG. 26




Features include a high tensile strength leaf chain and sealed roller bearings for maximum reliability and productivity.

General service vehicles up to 18,000 lbs. with wheelbases from 194" to 230" and align vehicles up to 236" in maximum wheelbase.

INFORMATION FOR CHAIN-DRIVE  
30-60K 4-POSTS AVAILABLE AT  
[CHALLENGERLIFTS.COM](http://CHALLENGERLIFTS.COM)

## ALIGNMENT RACK UPGRADE



PART # AR44018AR

(2) Stainless Steel Turn Plates

(2) Fold-Down Wheel Stops

(2) Work Steps

(2) Rolling Jacks

(1) Airline Kit

## REQUIREMENTS



78" +VEHICLE



14' RECOMMENDED



24' RECOMMENDED



208-230V, 1PH, 30A

MODEL # 44018



# 30K HEAVY-DUTY 4-POST

MODEL # 4030

FULL SPECIFICATIONS PG. 26



With general service or alignment versions and three options in length, our 30,000 lbs. HD 4-Post is no understatement.

The cable and cylinder system with steel sheaves provide durability make up the HD design.

Non-skid louvered approach ramps and a built-in runway rail system bring versatility to any workspace.

Service vehicles up to a maximum wheelbase of 317" and perform 2-wheel alignment on vehicles up to 292" maximum wheelbase.



RJ15

## MAKE THE MOST OF YOUR 4-POST

ADD ROLLING JACKS FOR A  
COMPLETE INSTALL

More details on next page.

MODEL # 4030



## REQUIREMENTS



72" + VEHICLE



17' RECOMMENDED



28' RECOMMENDED



208-230V, 1PH, 30A



90-120 PSI



# 4-POST UPGRADES

Rolling jacks are a great addition to any auto repair shop or garage looking to take full advantage of our 4-Post lifts.

**Eliminate the need to use manual, awkward bottle jacks and install a pair of rolling jacks.**

These jacks roll easily along the accessory rail and include extendable widths and adapters to ensure you can reach vehicle pick-up points.

- 6,000 - 35,000 lbs. capacity
- Low-profile, adjustable heights allow for an unobstructed workspace when not in use
- Two-hand use ensures technician safety
- All jacks complete with filter lubricator and regulator



## ROLLING JACKS

| PART NUMBER | CAPACITY    | DESCRIPTION                                                                                                                   | COMPATIBLE WITH     |
|-------------|-------------|-------------------------------------------------------------------------------------------------------------------------------|---------------------|
| RJ6         | 6,000 lbs.  | Air/hydraulic operated rolling jack - adjustable width                                                                        | 4P12                |
| RJ7.5       | 7,500 lbs.  | Air/hydraulic operated rolling jack - adjustable width                                                                        | 4P14, 4115 Series   |
| RJ9-GS      | 9,000 lbs.  | Air/hydraulic operated rolling jack - adjustable width                                                                        | 4018XFX             |
| RJ9S        | 9,000 lbs.  | Air/hydraulic operated rolling jack - adjustable width (34" - 42")                                                            | 44018 Series        |
| RJ9A        | 9,000 lbs.  | Air/hydraulic operated rolling jack - adjustable width (34" - 42")                                                            | AR44018AR           |
| RJ15        | 15,000 lbs. | Air/hydraulic operated rolling jack - adjustable width (43½" - 60¼")                                                          | 4030 Series         |
| SAJ15       | 15,000 lbs. | Air/hydraulic operated rolling jack - adjustable width (43" - 53½")<br>Serial number or model number required to place order. | 44030 Series        |
| SAJ25       | 25,000 lbs. | Air/hydraulic operated rolling jack - adjustable width (45" - 55")                                                            | 44040, 44050, 44060 |
| SAJ35       | 35,000 lbs. | Air/hydraulic operated rolling jack - adjustable width (45" - 55")                                                            | 44050, 44060        |

## ROLLING JACK ADAPTERS

| PART #   | DESCRIPTION                 | COMPATIBLE WITH |
|----------|-----------------------------|-----------------|
| 10333-RJ | Sprinter® Adapter Kit       | RJ6, RJ7.5, RJ9 |
| 10355-6  | Pair of 6" Stack Extensions | RJ6, RJ7.5, RJ9 |
| 10355-9  | Pair of 9" Stack Extensions | RJ6, RJ7.5, RJ9 |

## AIRLINE KITS

| PART #  | DESCRIPTION             | COMPATIBLE WITH   |
|---------|-------------------------|-------------------|
| 40230-E | Air Accessory Kit Model | 4115              |
| 40230-X | Air Accessory Kit Model | 4115              |
| 44AK18  | Air Kit for Model       | 44018/4018        |
| 44AK30  | Air Kit for Model       | 44030/4030 Series |
| 44AK40  | Air Kit for Model       | 44040-44060       |

## RAMP KITS

| PART #       | DESCRIPTION                                               | LENGTH | COMPATIBLE WITH |
|--------------|-----------------------------------------------------------|--------|-----------------|
| 4030-RA      | Drive-Through Ramp Kit                                    | 36"    | 4030 Series     |
| 4030-RA6     | Drive-Through Ramp Kit                                    | 72"    | 4030 Series     |
| 44RK18       | Pivoting Ramp Kit                                         | 52"    | 44018AR         |
| 44RK30       | Pivoting Ramp Kit                                         | 36"    | 44030 Series    |
| 44RKE30      | Extended Pivoting Ramp Kit                                | 72"    | 44030 Series    |
| 44RK40       | Fixed Ramp Kit                                            | 96"    | 44040-44060     |
| 44EK3        | Bolt-On Runway Extension Kit                              | 36"    | 44030 Series    |
| 40707        | Louvered Ramp Kit for Drive-Through Application, 22" wide | 36"    | 4115 Series     |
| 40707L       | Ramp Kit for Drive-Through Application, 22" wide          | 52"    | 4115 Series     |
| EAK0371V101A | Louvered Ramp Kit for Drive-Through Application, 26" wide | 36"    | 4115 Series     |
| EAK0371V102A | Ramp Kit for Drive-Through Application, 26" wide          | 52"    | 4115 Series     |

# SHORT- AND MID-RISE LIFTS

Our short and mid-rise lifts are a great choice for **Express Service bays** or **brake and tire servicing needs**.

## 10K SHORT-RISE

MODEL # SRM10

FULL SPECIFICATIONS PG. 28

With a brake and express tire service specialty, this low-rise 10,000 lbs. lift has a surprisingly small footprint for all its capabilities.

While lifting small passenger cars to light trucks, **the lift's louvered approach ramps will bring better traction while spotting vehicles.**

**Flush- and Surface-mount options are available.**

**HOSE COVERS INCLUDED**

Standard spotting blocks and optional auxiliary adapters reach a more comprehensive range of vehicle lift points.



MODEL # SRM10


### STANDARD



#### 2-POSITION ADAPTERS

PART # SR10-001  
SET OF 4.

### OPTIONAL



#### 1 1/2" SPOTTING BLOCK

PART # 10549  
SET OF 4.



#### 3" X 4" X 5" U-CHANNEL

PART # 63100  
SET OF 4.



#### MOBILE POWER UNIT

PART # SRM10-MPU  
QUICK DISCONNECT

## REQUIREMENTS



10' MINIMUM



12' RECOMMENDED



24' RECOMMENDED



115V, 1PH, 20A

## 6K PORTABLE MID-RISE

MODEL # MR6

FULL SPECIFICATIONS PG. 28

Capable of operating indoors or out, this 6,000 lbs. lift saves **valuable shop space** while lifting small passenger cars to light-duty trucks for brake and tire service.

**Reach more vehicle lift points with included auxiliary adapters.** Additional features include a rotating arm design with rubber pads and a low drive-over clearance.



MODEL # MR6

## REQUIREMENTS



12' MINIMUM



12' RECOMMENDED



28' RECOMMENDED



115V, 1PH, 20A

### STANDARD



#### 3" EXTENSION BASE

PART # MR6AK1  
SET OF 4.



#### 7" EXTENSION BASE

PART # TYJ3-05-02G  
SOLD INDIVIDUALLY



# SCISSOR LIFTS

Scissor Lifts are a popular choice for body shops and express service bays. **They are compact but also engineered for reliability and performance.**

## 7.7K SCISSOR

MODEL # DX77

FULL SPECIFICATIONS PG. 29

Our 7,700 lbs. capacity scissor lift is engineered with efficiency and productivity in mind.

**With a synchronized hydraulic system, it can easily lift all makes and models (within rated capacity)** and diamond-plate, flip-up approach ramps extend the platform to accommodate longer wheelbase vehicles.

The DX77 offers free access around the vehicle and between platforms, with a cross-member-free design, providing an uncluttered work area and comes standard with two sets of rubber spotting blocks, 1.5" and 3". Flush- and Surface-mount available.



MODEL # DX77  
WITH # DX77-ERK

## REQUIREMENTS


-  **12' MINIMUM**
-  **12' RECOMMENDED**
-  **24' RECOMMENDED**
-  **208-230V, 1PH, 30A**
-  **90-120 PSI**

Ramps that anchor to the floor and allow more effortless loading of vehicles with low ground clearance.

## EXTENDED RAMP KIT UPGRADE


PART # DX77-ERK

## STANDARD



### 1½" SPOTTING BLOCK

PART # 10549  
SET OF 4.



### 3" X 4" X 5" U-CHANNEL

PART # 63100  
SET OF 4.

## OPTIONAL



### 7½" SPOTTING BLOCK

PART # 10551-04  
SET OF 4.

# 14K HEAVY-DUTY SCISSOR ALIGNMENT



MODEL # SX14  
FULL SPECIFICATIONS PG. 29

Easy to operate and load, this 14,000 lbs. lift **comes standard with productivity upgrades like LED lighting, pneumatic single-point locking rear slip plates, and a photocell to ensure runway synchronization.** Dual hydraulic cylinders provide smooth operation.

Optional extended ramps help accommodate low-clearance vehicles.


Flush- and Surface-mount available.



MODEL # SX14  
STANDARD  
MODEL #SX14-FLUSH  
FLUSH MOUNT

## ALIGNMENT RACK


- (1) Airline Kit
- (2) Rolling Jacks
- (2) Fold-Down Wheel Stops
- (2) Stainless Steel Turn Plates



## REQUIREMENTS

-  **12' MINIMUM**
-  **12' RECOMMENDED**
-  **28' RECOMMENDED**
-  **208-230V, 1PH, 30A**
-  **90-120 PSI**

**AUTOMATIC LED LIGHTS**  
TURN ON WHEN THE LIFT IS  
RAISED 18"

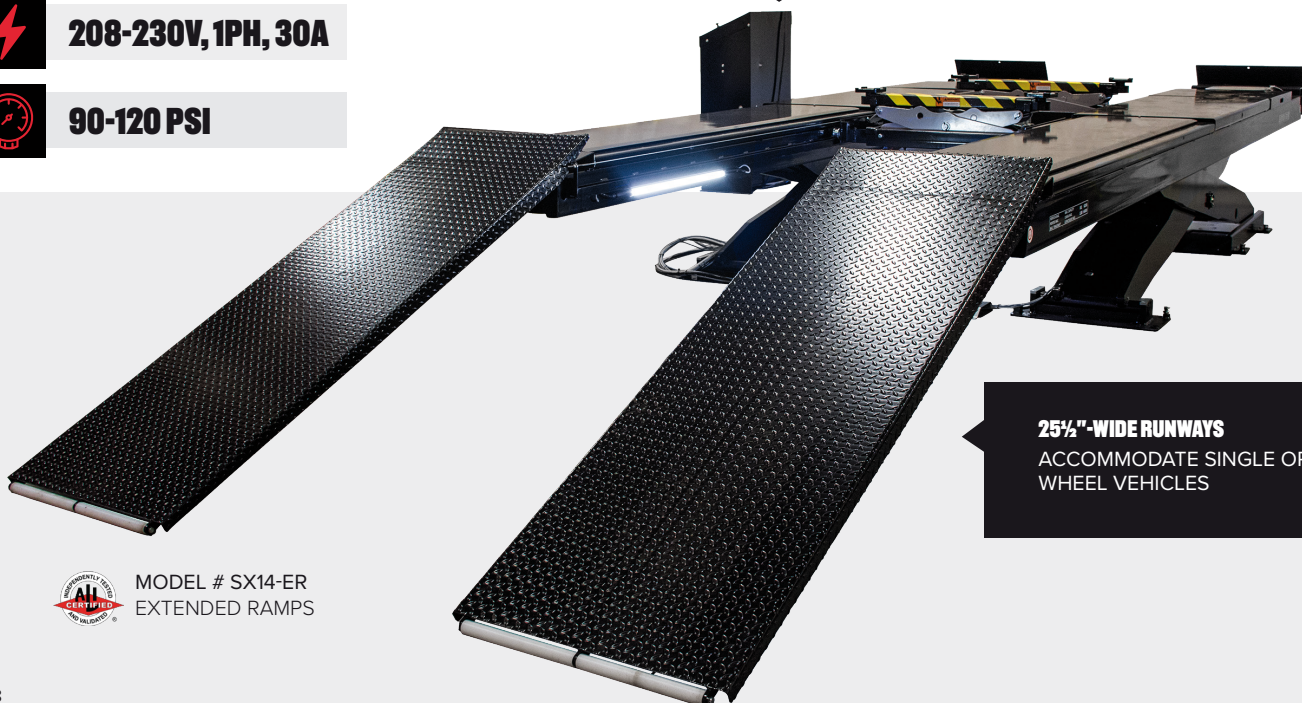

**25½"-WIDE RUNWAYS**  
ACCOMMODATE SINGLE OR DUAL-  
WHEEL VEHICLES



MODEL # SX14-ER  
EXTENDED RAMPS



# MOBILE COLUMN LIFTS



Our Mobile Columns provide the flexibility and convenience to lift any rubber-tired vehicle, within rated capacity, **without the need for pits, cables or compressed air.**

**NEW!**



MODEL # CLMM-5000



## 5K MEDIUM-DUTY

MODEL # CLMM-5000

FULL SPECIFICATIONS PG. 29

Capable of lifting 20,000 lbs. on any solid surface. Built with heavy-duty tow handles and spring-loaded, caster wheels. These mobile columns are perfect for servicing EVs.

## REQUIREMENTS



**14'8" MINIMUM**



**14' RECOMMENDED**



**28' RECOMMENDED**



**110V FOR CHARGING**

## 12.5K EXTENDED FORKS

MODEL # CLHM-125-XF

FULL SPECIFICATIONS PG. 29

These lifts offer a versatile, scalable, and efficient solution to vehicle lifting operations with a 12,500 lbs. capacity per column. The standard 22" forks allow for full tire engagement on vehicles with recessed wheels or dual tires and accommodates wheel diameter from 5"-24.5".

A maximum of eight lifts work in tandem or used in combination with our 14K/19K models.

## REQUIREMENTS



**14'8" MINIMUM**



**14' RECOMMENDED**



**28' RECOMMENDED**



**120-240 VAC @ 50-60 HZ**



MODEL # CLHM-125-XF



## 14 & 19K HEAVY-DUTY

MODEL # CLHM-140, CLHM-190, CLHM-190W  
FULL SPECIFICATIONS PG. 25



Our HD Mobile Columns are capable of lifting vehicles of any axle length or wheelbase up to **14,000 or 19,000 lbs. per column** on any solid surface.

Built with a heavy-duty tow handle for comfortable maneuverability.



**INTEGRATED TOUCH SCREEN  
CONTROL CONSOLE AT EACH COLUMN**

LIFT ANY 2-, 3-, OR 4-AXLE RUBBER-TIRE VEHICLE

**UP TO 152,000 LBS.**  
WITH 8 HD COLUMNS CONNECTED



MODEL # CLHM-140

## REQUIREMENTS



**14'8" MINIMUM**



**14' RECOMMENDED**



**28' RECOMMENDED**



**110V FOR CHARGING**



**CONNECT UP TO 8 HD COLUMNS  
WIRELESSLY.**

## HEAVY-DUTY WHEEL LIFTS

MODEL # CLHM-MR20, CLHM-MR30, AND CLHM-MR40  
FULL SPECIFICATIONS PG. 30

Capable of lifting 20, 30, or 40,000 lbs. per pair, expect years of worry- and maintenance-free lifting with this air-operated system.

Comprised of two individual lifts, the pair work to lift one end of a vehicle at a time. **Perfect for low ceiling shops, significant component removal, and eliminating the need to remove aerodynamic body panels from vehicles.**

## REQUIREMENTS



**14'8" MINIMUM**



**12'3" RECOMMENDED**



**28' RECOMMENDED**

MODEL # CLHM-MR30





# HEAVY-DUTY ADAPTERS


Designed to help your technicians **service vehicle types, like forklifts & multiple rear-axle**, more efficiently.

**NOT COMPATIBLE WITH CLMM-5000 OR CLHM-125-XF.**



**WING PROW ADAPTER**  
PART # CLHM-SP-240

24K lbs. capacity adapter for vehicles with components that could obstruct the column lift.

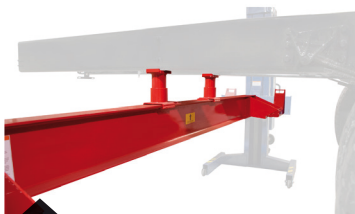

**CROSS-BEAM ADAPTER**  
PART # CLHM-CB-32A

32K lbs. capacity adapter to lift heavy-duty vehicles by the frame rails.



**FORK LIFT ADAPTER**  
PART # CLHM-FLA

15K lbs. capacity adapter to raise fork lifts 64".



**LOW-PROFILE END LIFT ADAPTER**  
PART # CLHM-EL90-LP

For CLHM Series




**CAB-OFF ADAPTER**  
PART # CLHM-CA-15  
For CLHM190 / CLHM140  
  
PART # 957-00036  
For CLMM5000

Adjustable length adapter to lift cabs off 2- and 4-door truck frames.



**REAR AXLE RESTRAINT**  
PART # CLHM-RAR-20

2K lbs. capacity restraint to support unengaged axle.

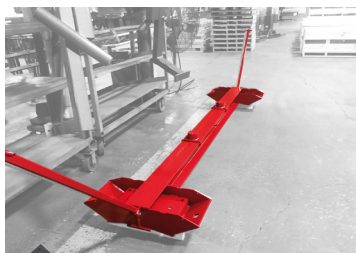

**LOW PROFILE CROSSBEAM**  
PART # CLHM-15-CB

9K lbs. capacity adapter to lift vehicles by the frame.



**ADAPTER STORAGE CART**  
PART # CLHM-CART

Mobile cart to store adapters.

## ADDITIONAL UPGRADES



**MAGNETIC LIGHT KIT**  
PART # CLHM-LS-LK

Two magnetic lights that are powered by the mobile column.



**GLARE SCREEN**  
PART # CLHM-GS

Reduces glare and protects the screen from worksite dirt.

**PROTECTIVE COVER**  
PART # CLHM-CVR-F (Full)  
PART # CLHM-CVR-H (Half)  
Sold individually.



# SHOP EQUIPMENT

Challenger Lifts offers a wide range of shop equipment to meet your needs. Our products are made from high-quality materials, ensuring durability, and are sure to meet your needs and exceed your expectations.



## ENGINE STAND

PART # CLHM-ES-2000

2K lbs. capacity, adjustable platform, 360°-rotation locking wheels.



## DISC BRAKE DOLLY

PART # CLHM-200

One-person operation for removing calipers and disc brake hubs.



## TRANSMISSION JACK

PART # CLHM-HTJ-2000

2.7K lbs. capacity, 72" max height, 360° rotating head, retractable tow handle.



## CLHM BUMPER JACK

PART # CLHM-BL20B

20K lbs. capacity, raises one end of vehicle for reliable work.



## DIFFERENTIAL ADAPTER

PART # CLHM-HD-DA

Heavy-duty adapters for use with CLHM-HTCJ-2000.



## SHOP CRANE

PART # CLHM-SC-220

2.2K lbs. capacity, folds for compact storage.



## F550 WHEEL END ADAPTER

PART # CLHM-F550

Adapter for Ford® F550 Model Trucks; for use with CLHM-200.



## TRANS JACK ADAPTER

PART # CLHM-90

Adapter for easy removal of transmission, for use with CLHM-HTJ-1000.

# SUPPORT STANDS



## HIGH-RISE STAND W/GAS ASSIST

PART # CLHM-4-THR

53"-72" total adjustment, 8k lbs. capacity each, sold individually



## HIGH-RISE STAND W/GAS ASSIST

PART # CLHM-7-THR

53"-72" total adjustment, 14k lbs. capacity each, sold individually



## HIGH-RISE STAND W/GAS ASSIST

PART # CLHM-10-THR

49"-83" total adjustment, 20k lbs. capacity each, sold individually



## MEDIUM STAND

PART # CLHM-10-THF

30"-52" total adjustment, 20k lbs. capacity each, sold in sets of 2



## SHORT STAND

PART # CLHM-10-TH

20"-32" total adjustment, 20k lbs. capacity each, sold in sets of 2



## 10K 2-POST VERSYMMETRIC®

## CL10AV3

| MODEL NUMBER*                                                                                                                                                                                                                                  | CL10AV3                                                                                                                   |                             | CL10AV3-DPC-QC | CL10A-XP9                 | CL10A-XP9-DPC-QC                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------------------|----------------|---------------------------|----------------------------------|
| Description                                                                                                                                                                                                                                    | 10K Versymmetric®                                                                                                         |                             |                | 10K                       |                                  |
| Version                                                                                                                                                                                                                                        | Standard                                                                                                                  | w/ DPC & <b>QuickCycle™</b> |                | w/ XP9                    | w/ XP9, DPC & <b>QuickCycle™</b> |
| Lifting Capacity                                                                                                                                                                                                                               | 10,000 lbs.                                                                                                               |                             |                | 9,000 lbs.                |                                  |
| Lift Configuration                                                                                                                                                                                                                             | Versymmetric® 3-Stage Front & Rear                                                                                        |                             |                | Drive-on Express Pad      |                                  |
| Rise Height                                                                                                                                                                                                                                    | 74⅞"                                                                                                                      |                             |                | 70"                       |                                  |
| Height of Columns                                                                                                                                                                                                                              | <b>Standard:</b> 11' 8" or 11' 2"   <b>2' Extensions:</b> 13' 8" or 13' 2"   <b>3' Extensions:</b> 14' 8" or 14' 2"       |                             |                |                           |                                  |
| Overall Height                                                                                                                                                                                                                                 | <b>Standard:</b> 11' 8"   <b>2' Extensions:</b> 13' 8"   <b>3' Extensions:</b> 14' 8"                                     |                             |                |                           |                                  |
| Adjustable Width Overall                                                                                                                                                                                                                       | [-12"] 11' 6½"   [-6"] 12' ½"   [MAX] 12' 6½"                                                                             |                             |                | [-12"] 11' 6½"            |                                  |
| Drive Thru Clearance                                                                                                                                                                                                                           | 8' 4" / 8' 10" / 9' 4"                                                                                                    |                             |                | 7' 7" / 7' 11½"           |                                  |
| Floor to Overhead Switch                                                                                                                                                                                                                       | <b>Standard:</b> 10' 8½" or 11' 2½"   <b>2' Extensions:</b> 12' 8½" or 13' 2½"   <b>3' Extensions:</b> 13' 8½" or 14' 2½" |                             |                |                           |                                  |
| Front Arm Reach                                                                                                                                                                                                                                | <b>Min.</b> 20" <b>Max.</b> 42"                                                                                           |                             |                | NA                        |                                  |
| Rear Arm Reach                                                                                                                                                                                                                                 | <b>Min.</b> 37⅝" <b>Max.</b> 60"                                                                                          |                             |                | NA                        |                                  |
| Screw Pad Height                                                                                                                                                                                                                               | <b>Min.</b> 3⅞" <b>Max.</b> 6⅞"                                                                                           |                             |                | NA                        |                                  |
| Inside Columns                                                                                                                                                                                                                                 | 9' 2" / 9' 8" / 10' 2"                                                                                                    |                             |                | NA                        |                                  |
| Low Lock Height                                                                                                                                                                                                                                | 12" Net Rise                                                                                                              |                             |                |                           |                                  |
| Platform Length                                                                                                                                                                                                                                | NA                                                                                                                        |                             |                | 58" / 66½" / 75"          |                                  |
| Motor / Voltage                                                                                                                                                                                                                                | 2HP, 208v-230v, 60Hz, 1Ph                                                                                                 | 3HP, 208v-230v, 60Hz, 1Ph   |                | 2HP, 208v-230v, 60Hz, 1Ph | 3HP, 208v-230v, 60Hz, 1Ph        |
| Rise Time                                                                                                                                                                                                                                      | 38s                                                                                                                       | <b>24s</b>                  |                | 38s                       | <b>24s</b>                       |
| Max. Load per Arm                                                                                                                                                                                                                              | 2,500 lbs.                                                                                                                |                             |                | NA                        |                                  |
| Required Ceiling Height                                                                                                                                                                                                                        | <b>Standard:</b> 12'   <b>2' Extensions:</b> 13' 3" or 13' 9"   <b>3' Extensions:</b> 14' 3" or 14' 9"                    |                             |                |                           |                                  |
| ALI® Certified                                                                                                                                                                                                                                 |                                       |                             |                |                           |                                  |
| Available Colors                                                                                                                                                                                                                               |                                       |                             |                |                           |                                  |
| *To order the EV adapter kit package, include "-EV" on any CL10A part number.<br>The EV adapter kit comes with: Universal Foot Pads (4), EVFPK Low-Profile EV-ready Foot Pads (4), 3-inch Adapters (4), 6-inch Adapters (4), Storage Racks (4) |                                                                                                                           |                             |                |                           |                                  |

## 12K 2-POST / LOW-CEILING

## CL12A / CL12A-LC

| MODEL NUMBER*                                                                                                                                                                                                                               | CL12A                                                                                | CL12A-1          | CL12A-2          | CL12A-DPC-QC                | CL12A-LC                  | CL12A-LC-DPC-QC             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------|------------------|-----------------------------|---------------------------|-----------------------------|
| Description                                                                                                                                                                                                                                 | 12K                                                                                  |                  |                  |                             | 12K Low-Ceiling           |                             |
| Version                                                                                                                                                                                                                                     | Standard                                                                             | w/ 1' Extensions | w/ 2' Extensions | w/ DPC & <b>QuickCycle™</b> |                           | w/ DPC & <b>QuickCycle™</b> |
| Lifting Capacity                                                                                                                                                                                                                            | 12,000 lbs.                                                                          |                  |                  |                             |                           |                             |
| Lift Configuration                                                                                                                                                                                                                          | Symmetric                                                                            |                  |                  |                             |                           |                             |
| Arm Configuration                                                                                                                                                                                                                           | 3-Stage Front & Rear                                                                 |                  |                  |                             |                           |                             |
| Rise Height                                                                                                                                                                                                                                 | 78¾"                                                                                 |                  |                  |                             | 74¾"                      |                             |
| Overall Height                                                                                                                                                                                                                              | 13' 8" or 13' 2"                                                                     | 14' 8" or 14' 2" | 15' 8" or 15' 2" | 13' 8" or 13' 2"            | 11' 11"                   |                             |
| Overall Width                                                                                                                                                                                                                               | Standard: 11' 10"   +6": 12' 4"   +12": 12' 10"                                      |                  |                  |                             |                           |                             |
| Drive Thru Clearance                                                                                                                                                                                                                        | Standard: 8' 7½"   +6": 9' 1½"   +12": 9' 7½"                                        |                  |                  |                             |                           |                             |
| Floor to Overhead Switch                                                                                                                                                                                                                    | 13' 2" or 12' 8"                                                                     | 14' 2" or 13' 8" | 15' 2" or 14' 8" | 13' 2" or 12' 8"            | 11' 4½"                   |                             |
| Arm Reach                                                                                                                                                                                                                                   | Min. 27½"    Max. 59"                                                                |                  |                  |                             |                           |                             |
| Screw Pad Height                                                                                                                                                                                                                            | 5"                                                                                   |                  |                  |                             |                           |                             |
| Motor / Voltage                                                                                                                                                                                                                             | 2HP, 208v-230v, 60Hz, 1Ph                                                            |                  |                  | 3HP, 208v-230v, 60Hz, 1Ph   | 2HP, 208v-230v, 60Hz, 1Ph | 3HP, 208v-230v, 60Hz, 1Ph   |
| Rise Time                                                                                                                                                                                                                                   | 63s                                                                                  |                  |                  | 40s                         | 60s                       | 38s                         |
| Min. Ceiling Height                                                                                                                                                                                                                         | 13' 9" or 13' 3"                                                                     | 14' 9" or 14' 3" | 15' 9" or 15' 3" | 13' 9" or 13' 3"            | 12'                       |                             |
| ALI® Certified                                                                                                                                                                                                                              |  |                  |                  |                             |                           |                             |
| Available Colors                                                                                                                                                                                                                            |  |                  |                  |                             |                           |                             |
| *To order the EV adapter kit package, include "-EV" on any CL12A part number. The EV adapter kit comes with: Universal Foot Pads (4), EVFPK Low-Profile EV-ready Foot Pads (4), 3-inch Adapters (4), 6-inch Adapters (4), Storage Racks (4) |                                                                                      |                  |                  |                             |                           |                             |

SPECIFICATIONS

16K / 20K 2-POST

CL16 / CL20

| MODEL NUMBER                 | CL16-0-3S                                                                                                                                                                                                                                               |                     | CL16-2-3S                  | CL20-0                                 | CL20-2                     |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------------------|----------------------------------------|----------------------------|
| Description                  | 16K Standard                                                                                                                                                                                                                                            |                     | 16K Extended Height        | 20K Standard                           | 20K Extended Height        |
| Lifting Capacity             | 16,000 lbs.                                                                                                                                                                                                                                             |                     |                            | 20,000 lbs.                            |                            |
| Lift Configuration           | Symmetric                                                                                                                                                                                                                                               |                     |                            |                                        |                            |
| Arm Configuration            | 3-Stage Front & Rear                                                                                                                                                                                                                                    |                     |                            | 2-Stage Front & Rear                   |                            |
| Max. Load Per Arm            | 4,000 lbs.                                                                                                                                                                                                                                              |                     |                            | 5,000 lbs.                             |                            |
| Rise Height                  | Min. 75½" Max. 81½" (w/ stack adapter)                                                                                                                                                                                                                  |                     |                            | Min. 76⅞" Max. 84⅞" (w/ stack adapter) |                            |
| Overall Height Options       | 13' 6"   14'   14'6"                                                                                                                                                                                                                                    | 15'6"   16'   16'6" |                            | 13'6"   14'   14'6"                    | 15'6"   16'   16'6"        |
| Overall Width Options        | 13' 10¾"   13' 4¾"   12' 10¾"                                                                                                                                                                                                                           |                     |                            |                                        |                            |
| Drive-Thru Clearance         | 8' 8¼"   9' 2¼"   9' 8¼"                                                                                                                                                                                                                                |                     | 8' 8¼"   9' 2¼"   9' 8¼"   | 8' 8¼"   9' 2¼"   9' 8¼"               | 8' 8¼"   9' 2¼"   9' 8¼"   |
| Floor to Overhead Switch     | 12' 11"   13' 5"   13' 11"                                                                                                                                                                                                                              |                     | 14' 11"   15' 5"   15' 11" | 12' 11"   13' 5"   13' 11"             | 14' 11"   15' 5"   15' 11" |
| Arm Reach                    | Min. 36⅝" Max. 75"                                                                                                                                                                                                                                      |                     |                            | Min. 38½" Max. 62"                     |                            |
| Screw Pad Height             | Min. 5" Max. 6½"                                                                                                                                                                                                                                        |                     |                            | Min. 6⅜" Max. 7⅞"                      |                            |
| Between Columns              | Standard: 10'   +6": 10' 6"   +12": 11'                                                                                                                                                                                                                 |                     |                            |                                        |                            |
| Motor / Voltage              | 3HP, 208-230v, 60Hz, 1Ph                                                                                                                                                                                                                                |                     |                            |                                        |                            |
| Air Supply Required          | 90-120 psi                                                                                                                                                                                                                                              |                     |                            |                                        |                            |
| Rise Time                    | 62s                                                                                                                                                                                                                                                     |                     |                            |                                        |                            |
| Min. Ceiling Height Required | 13' 8"   14' 2"   14' 8"                                                                                                                                                                                                                                |                     | 15' 8"   16' 2"   16' 8"   | 13' 8"   14' 2"   14' 8"               | 15' 8"   16' 2"   16' 8"   |
| ALI® Certified               |                                                                                                                                                                        |                     |                            |                                        |                            |
| Available Colors             |    |                     |                            |                                        |                            |

2-POST HEIGHT EXTENSIONS

| LIFT SERIES                                        | CL10    | CL12A    |
|----------------------------------------------------|---------|----------|
| LC Extension                                       |         | 12805-LC |
| Std. Extension                                     | A2404-0 | 12805-0  |
| 1' Extension                                       |         | 12805-1  |
| 2' Extension                                       | A2404-2 | 12805-2  |
| 3' Extension                                       | A2404-3 |          |
| Note: Color option must be stated at time of order |         |          |

POWER UNIT UPGRADES

| PART # | CHOOSE VOLTAGE   | COMPATIBLE W/                                                    |
|--------|------------------|------------------------------------------------------------------|
| 3PH    | 208V, 230V, 460V | 2-Post 10K (without DPC), 12K, 15K, 16K, 20K (without DPC or QC) |
| 3PH    | NA               | 4-Post 14K, 15K, and 4030 Series                                 |
| 3PH    | NA               | Cassette Lifts 10K (without BMC), 12K (without BMC or QC)        |

\*CALL THE CHALLENGER LIFT FACTORY FOR 3-PHASE POWER UNIT UPGRADE OPTIONS.

3.3K LIFT TABLE

BT3300

| MODEL NUMBER               | BT3300                                                                                |
|----------------------------|---------------------------------------------------------------------------------------|
| Lifting Capacity           | 3,300 lbs.                                                                            |
| Rise Height                | 76¾"                                                                                  |
| Lowered Height             | 29½"                                                                                  |
| Platform Height Adjustment | 1¾"                                                                                   |
| Platform Length            | 68½ - 81⅝"                                                                            |
| Platform Width             | 31½"                                                                                  |
| Min. Footpad Support       | NA                                                                                    |
| Max. Footpad Support       | NA                                                                                    |
| Deck Length                | 59"                                                                                   |
| Base Height                | 8"                                                                                    |
| Overall Length             | 116⅜"                                                                                 |
| Motor /Voltage             | 2HP, 115v, 60Hz, 1Ph                                                                  |
| Available Colors           |  |

For more information,  
visit [challengeryliffts.com](http://challengeryliffts.com)  
or scan the QR code.





## 10K STANDARD / 12K HEAVY-DUTY INGROUND

## EV1020 / EV1220

| MODEL NUMBER               | EV1020 / EV1020-QC                                                                  | EV1020XP9 / EV1020XP9-QC        | EV1220 / EV1220-QC            |
|----------------------------|-------------------------------------------------------------------------------------|---------------------------------|-------------------------------|
| Description                | Standard / <b>QuickCycle™</b>                                                       | XP9 / XP9 w/ <b>QuickCycle™</b> | Standard / <b>QuickCycle™</b> |
| Lifting Capacity           | 10,000 lbs.                                                                         | 9,000 lbs.                      | 12,000 lbs.                   |
| Arm Configuration          | 3-Stage Front & Rear                                                                | Drive-on Express Pad            | 3-Stage Front & Rear          |
| Stroke                     | 72"                                                                                 |                                 |                               |
| Rise Height                | 78"                                                                                 |                                 |                               |
| Overall Width              | 9' 2¼"                                                                              | NA                              | 9' 7"                         |
| Drive Thru Clearance       | 6' 11½"                                                                             | NA                              | 7' 3"                         |
| Arm Reach                  | <b>Min. 1' 7⅝" Max. 3' 6⅝"</b>                                                      | NA                              | <b>Min. 1' 7⅝" Max. 4'</b>    |
| Platform Length            | NA                                                                                  | 58" / 66½" / 75"                | NA                            |
| Distance Between Platforms | NA                                                                                  | 31½"                            | NA                            |
| Screw Pad Height           | <b>Min. 4⅞" Max. 6⅞"</b>                                                            | NA                              | 4½" - 6¼"                     |
| Plunger Diameter           | 8½"                                                                                 |                                 |                               |
| Air Supply Required        | 90-120 psi                                                                          |                                 |                               |
| Motor / Voltage            | 2HP, 208v-230v, 60Hz, 1Ph / <b>3HP, 208v-230v, 60Hz, 1Ph</b>                        |                                 |                               |
| Rise Time                  | 41s / <b>25s</b>                                                                    |                                 | 63s / <b>38s</b>              |
| Max. Load per Arm          | 2,500 lbs.                                                                          | 4,500 lbs.                      | 3,000 lbs.                    |
| Required Ceiling Height    | 12'                                                                                 | NA                              | 12'                           |
| ALI® Certified             |  |                                 |                               |
| Available Colors           |  |                                 |                               |

\*AVAILABLE IN QUICKCYCLE & BENCH MOUNT CONTROLS - TALK TO YOUR REP

## 10K WIDE / 12K WIDE INGROUND

## EW10 / EW12

| MODEL NUMBER            | EW10 / EW10-QC                                                                        | EW12 / EW12-QC                |
|-------------------------|---------------------------------------------------------------------------------------|-------------------------------|
| Description             | Standard / <b>QuickCycle™</b>                                                         | Standard / <b>QuickCycle™</b> |
| Lifting Capacity        | 10,000 lbs.                                                                           | 12,000 lbs.                   |
| Arm Configuration       | 3-Stage Front & Rear                                                                  |                               |
| Stroke                  | 72"                                                                                   |                               |
| Rise Height             | 78"                                                                                   |                               |
| Overall Width           | 117½"                                                                                 | 121½"                         |
| Drive Thru Clearance    | 88"                                                                                   |                               |
| Arm Reach               | <b>Min. 20" Max. 42"</b>                                                              | <b>Min. 20" Max. 48⅞"</b>     |
| Platform Length         | NA                                                                                    | NA                            |
| Screw Pad Height        | 4" - 6⅞"                                                                              |                               |
| Plunger Diameter        | 8½"                                                                                   |                               |
| Air Supply Required     | 90-120 psi                                                                            |                               |
| Motor / Voltage         | 2HP, 208v-230v, 60Hz, 1Ph / <b>3HP, 208v-230v, 60Hz, 1Ph</b>                          |                               |
| Rise Time               | 41s / <b>24s</b>                                                                      | 63s / <b>38s</b>              |
| Max. Load per Arm       | 2,500 lbs.                                                                            | 3,000 lbs.                    |
| Required Ceiling Height | 12'                                                                                   |                               |
| ALI® Certified          |  |                               |
| Available Colors        |  |                               |

\*AVAILABLE IN QUICKCYCLE & BENCH MOUNT CONTROLS - TALK TO YOUR REP

# 15K 4-POST GENERAL SERVICE & ALIGNMENT

## AR4115

| MODEL NUMBER            | AR4115EA0-ER                                                                      | AR4115EA0-SR | AR4115EAX-ER | AR4115EAX-SR | AR4115XA0-ER | AR4115XA0-SR | AR4115XAX-ER | AR4115XAX-SR |
|-------------------------|-----------------------------------------------------------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Deck Type               | Alignment Rack                                                                    |              |              |              |              |              |              |              |
| Description of Ramps    | Extended                                                                          | Standard     | Extended     | Standard     | Extended     | Standard     | Extended     | Standard     |
| Lifting Capacity        | 15,000 lbs.                                                                       |              |              |              |              |              |              |              |
| Open or Closed Front    | Open                                                                              | Open         | Closed       | Closed       | Open         | Open         | Closed       | Closed       |
| Max. Wheelbase          | 183"                                                                              |              |              |              | 210½"        |              |              |              |
| Max. 2-Wheel Alignment  | 167¾"                                                                             |              |              |              | 195¼"        |              |              |              |
| Max. 4-Wheel Alignment  | 68" - 158"                                                                        |              |              |              |              |              |              |              |
| Rise Height             | 78"                                                                               |              |              |              |              |              |              |              |
| Overall Extended Length | 266½"                                                                             | 250¾"        | 266½"        | 250¾"        | 292¾"        | 277"         | 292¾"        | 277"         |
| Overall Width           | 142"                                                                              |              |              |              |              |              |              |              |
| Width of Runways        | 26⅜"                                                                              |              |              |              |              |              |              |              |
| Height of Runways       | 7"                                                                                |              |              |              |              |              |              |              |
| Standard Motor/Voltage* | 3HP, 208v-230v, 60Hz, 1Ph                                                         |              |              |              |              |              |              |              |
| Rise Time               | 85s                                                                               |              |              |              |              |              |              |              |
| ALI® Certified          |  |              |              |              |              |              |              |              |
| Available Colors        |  |              |              |              |              |              |              |              |

# 15K 4-POST GENERAL SERVICE

## 4115

| MODEL NUMBER             | 4115EFO                                                                             | 4115EFX   | 4115XFO                  | 4115XFX   |
|--------------------------|-------------------------------------------------------------------------------------|-----------|--------------------------|-----------|
| Deck Type                | Flat Deck                                                                           |           |                          |           |
| Description              | Standard                                                                            |           | Extended                 |           |
| Lifting Capacity         | 15,000 lbs.                                                                         |           |                          |           |
| Open or Closed Front     | Open                                                                                | Closed    | Open                     | Closed    |
| Max. Wheelbase           | 183"                                                                                |           | 210½"                    |           |
| Max. 2-Wheel Alignment   | NA                                                                                  |           |                          |           |
| Max. 4-Wheel Alignment   | NA                                                                                  |           |                          |           |
| Rise Height              | 78"                                                                                 |           |                          |           |
| Overall Length           | 20' 10¾"                                                                            | 20' 7⅝"   | 23' 1"                   | 22' 11½"  |
| Overall Width            | 142"                                                                                |           |                          |           |
| Inside Columns (L to R)  | Front: 120¾" Rear: 125½"                                                            | 125½"     | Front: 120¾" Rear: 125½" | 125½"     |
| Between Columns (F to R) | 195"                                                                                | 196⅜"     | 222½"                    | 223⅜"     |
| Height of Columns        | Front: 99 ¼" Rear: 98"                                                              | 98"       | Front: 99 ¼" Rear: 98"   | 98"       |
| Width of Runways         | 26⅜"                                                                                |           |                          |           |
| Height of Runways        | 7"                                                                                  |           |                          |           |
| Width Between Runways    | 40⅝"                                                                                |           |                          |           |
| Air Supply Required      | 90-120 psi                                                                          |           |                          |           |
| Standard Motor/Voltage*  | 3HP, 208v-230v, 60Hz, 1Ph                                                           |           |                          |           |
| Rise Time                | 85s                                                                                 |           |                          |           |
| Required Bay Size W x L  | 14' x 24'                                                                           | 12' x 24' | 14' x 26'                | 12' x 26' |
| ALI® Certified           |  |           |                          |           |
| Available Colors         |  |           |                          |           |



# 18K 4-POST GENERAL SERVICE & ALIGNMENT

## 44018

| MODEL NUMBER              | 44018                                                                                | 44018E          | 44018AR                   |
|---------------------------|--------------------------------------------------------------------------------------|-----------------|---------------------------|
| Description               | Standard                                                                             | Extended Length | Alignment Deck            |
| Lifting Capacity          | 18,000 lbs.                                                                          |                 |                           |
| Max. Wheelbase            | 194" / 16' 2"                                                                        | 230" / 19' 2"   | 236" / 19' 2"             |
| Max. 2 Wheel Alignment    | NA                                                                                   | NA              | 220"                      |
| Min-Max 4 Wheel Alignment | NA                                                                                   | NA              | <b>Min: 98" Max: 206"</b> |
| Rise Height               | 78 ¾"                                                                                |                 | 83¼"                      |
| Overall Length            | 21' 7"                                                                               | 24' 4"          | 25' 11½"                  |
| Overall Width             | 11' 6⅛"                                                                              |                 | 11' 9½"                   |
| Inside Columns            | 10' 1"                                                                               |                 | 10' 2"                    |
| Between Columns           | 17'                                                                                  | 20'             | 17'                       |
| Overall Height            | 8' 6 ½"                                                                              |                 |                           |
| Height of Runways         | 7 ¼"                                                                                 |                 | 11 ⅞"                     |
| Width of Runways          | 22"                                                                                  |                 |                           |
| Width Between Runways     | 36" - 54"                                                                            |                 |                           |
| Standard Motor/Voltage    | 3HP, 208v-230v, 60Hz, 1Ph                                                            |                 |                           |
| Required Amps             | 30                                                                                   |                 |                           |
| Rise Time                 | 60s                                                                                  |                 |                           |
| Available Colors          |  |                 |                           |

# 18K 4-POST GENERAL SERVICE

## 4018XFX

| MODEL NUMBER           | 4018XFX                                                                             |
|------------------------|-------------------------------------------------------------------------------------|
| Lifting Capacity       | 18,000 lbs.                                                                         |
| Max. Wheelbase         | 220"                                                                                |
| Rise Height            | 72"                                                                                 |
| Overall Length         | 303⅜"                                                                               |
| Overall Width          | 152⅛"                                                                               |
| Inside Columns         | 128⅓⅙"                                                                              |
| Between Columns        | 229⅛"                                                                               |
| Overall Height         | 98⅝"                                                                                |
| Height of Runways      | 9½"                                                                                 |
| Width of Runways       | 24"                                                                                 |
| Width Between Runways  | 40"                                                                                 |
| Standard Motor/Voltage | 208v-230v, 60Hz, 1Ph                                                                |
| Required Amps          | 23                                                                                  |
| Rise Time              | 70s                                                                                 |
| ALI® Certified         |  |
| Available Colors       |  |

# 30K 4-POST ALIGNMENT

# 4030

| MODEL NUMBER           | 4030SFX                                                                             | 4030SAX        | 4030EFX   | 4030EAX        | 4030XFX        | 4030XAX        |
|------------------------|-------------------------------------------------------------------------------------|----------------|-----------|----------------|----------------|----------------|
| Deck Type              | Flat Deck                                                                           | Alignment Deck | Flat Deck | Alignment Deck | Flat Deck      | Alignment Deck |
| Description            | Standard                                                                            |                | Extended  |                | Extra Extended |                |
| Lifting Capacity       | 30,000 lbs.                                                                         |                |           |                |                |                |
| Max. Wheelbase         | 244½"                                                                               |                | 281"      |                | 317"           |                |
| Max. 2-Wheel Alignment | NA                                                                                  | 219½"          | NA        | 256"           | NA             | 292"           |
| Rise Height            | 71 ¾"                                                                               |                |           |                |                |                |
| Overall Length         | 25' 8"                                                                              |                | 28' 8"    |                | 31' 8"         |                |
| Overall Width          | 14' 4 ¾"                                                                            |                |           |                |                |                |
| Inside Columns         | 12' 8"                                                                              |                |           |                |                |                |
| Between Columns        | 20' 6"                                                                              |                | 23' 6½"   |                | 26' 6 ½"       |                |
| Height of Columns      | 92 ¼"                                                                               |                |           |                |                |                |
| Height of Runways      | 10"                                                                                 |                |           |                |                |                |
| Width of Runways       | 24"                                                                                 |                |           |                |                |                |
| Width Between Runways  | 46" - 52"                                                                           |                |           |                |                |                |
| Air Supply Required    | 90-120 psi                                                                          |                |           |                |                |                |
| Standard Motor/Voltage | 3HP, 208v-230v, 60Hz, 1Ph                                                           |                |           |                |                |                |
| Rise Time              | 126s                                                                                |                |           |                |                |                |
| Min. Required Bay Size | 28' x 17'                                                                           |                | 31' x 17' |                | 34' x 17'      |                |
| ALI® Certified         |    |                |           |                |                |                |
| Available Colors       |  |                |           |                |                |                |

# 10K SHORT-RISE

# SRM10 / SRM10R

| MODEL NUMBER                     | SRM10                                                                               | SRM10R           |
|----------------------------------|-------------------------------------------------------------------------------------|------------------|
| Lifting Capacity                 | 10,000 lbs.                                                                         |                  |
| Rise Height                      | 22"                                                                                 | 17¾"             |
| Overall Length                   | 92½"                                                                                | 85½"             |
| Overall Width                    | 85" (+2½" for handle)                                                               | 73¼"             |
| Outside Width of Platforms       | 72"                                                                                 | NA               |
| Width Between Platforms          | 23"                                                                                 |                  |
| Overall Platform Length          | 50"                                                                                 |                  |
| Overall Ramp and Platform Length | 82½"                                                                                | NA               |
| Low Adapter Position             | 4¾"                                                                                 | Flush with floor |
| High Adapter Position            | 6¾"                                                                                 |                  |
| Lowered Height                   | 4¼"                                                                                 | NA               |
| Locking Bar Heights              | 13¾"   18¼"   21¼"                                                                  | 9½"   14½"   17" |
| Rearward Movement                | 13¼"                                                                                |                  |
| Standard Motor/Voltage           | 1HP, 115v, 60Hz, 1Ph                                                                |                  |
| ALI® Certified                   |  |                  |
| Available Colors                 |  |                  |

# 6K MID-RISE

# MR6

| MODEL NUMBER                | MR6                                                                                   |
|-----------------------------|---------------------------------------------------------------------------------------|
| Lifting Capacity            | 6,000 lbs.                                                                            |
| Rise Height                 | 53"                                                                                   |
| Overall Length              | 94"                                                                                   |
| Overall Width               | 40"                                                                                   |
| Min. Collapsed Table Height | 5½"                                                                                   |
| Pad Height                  | <b>Min:</b> 8⅝" <b>Max:</b> 60"                                                       |
| Hydraulic Hose              | 144"                                                                                  |
| Safety Lock Positions       | 6                                                                                     |
| Standard Motor/Voltage      | 1HP, 115v, 60Hz, 1Ph                                                                  |
| Rise Time                   | 45s                                                                                   |
| Min. Required Bay Size      | 10' x 22'                                                                             |
| Available Colors            |  |

For more information,  
visit [challengerlifts.com](http://challengerlifts.com)  
or scan the QR code.



## 7.7K SCISSOR

## DX77

| MODEL NUMBER            | DX77                                                                              | DX77-R      |
|-------------------------|-----------------------------------------------------------------------------------|-------------|
| Description             | Standard                                                                          | Flush Mount |
| Lifting Capacity        | 7,700 lbs.                                                                        |             |
| Rise Height             | 74 ½"                                                                             | 70"         |
| Overall Length          | 83 ¼"                                                                             |             |
| Overall Width           | 82"                                                                               | 69 ½"       |
| Platform Length         | 59"                                                                               |             |
| Platform Width          | 24 ½"                                                                             |             |
| Width Between Platforms | 21" - 27"                                                                         |             |
| Ramp Length             | 11 ¾"                                                                             |             |
| Lowered Height          | 4 ½"                                                                              | NA          |
| Max. Wheelbase          | NA                                                                                |             |
| Wheel Alignment         | NA                                                                                |             |
| Standard Motor/Voltage  | 2HP, 208-220v, 60Hz, 1Ph                                                          |             |
| Air Supply Required     | 90-120 psi                                                                        |             |
| Rise Time               | 43s                                                                               |             |
| Max. Load per Platform  | 3,850 lbs.                                                                        |             |
| ALI® Certified          |  |             |
| Available Colors        |  |             |

## 14K HEAVY-DUTY SCISSOR ALIGNMENT

## SX14

| MODEL NUMBER            | SX14-FLUSH                                                                           | SX14-SR  | SX14-ER        |
|-------------------------|--------------------------------------------------------------------------------------|----------|----------------|
| Description             | Flush Mount                                                                          | Standard | Extended Ramps |
| Lifting Capacity        | 14,000 lbs.                                                                          |          |                |
| Rise Height             | 66 1/2"                                                                              | 77"      |                |
| Overall Length          | 219"                                                                                 | 265"     | 283"           |
| Overall Width           | 91 ¼"                                                                                |          |                |
| Platform Length         | NA                                                                                   |          |                |
| Platform Width          | 25 ½"                                                                                |          |                |
| Width Between Platforms | 40"                                                                                  |          |                |
| Ramp Length             | 62 ¾"                                                                                |          | 80 ¾"          |
| Lowered Height          | NA                                                                                   | 10 ½"    |                |
| Max. Wheelbase          | 183"                                                                                 |          |                |
| Wheel Alignment         | Min: 70 ¾" Max: 176"                                                                 |          |                |
| Standard Motor/Voltage  | 3HP, 208-240v, 60Hz, 1Ph                                                             |          |                |
| Air Supply Required     | 90-120 psi                                                                           |          |                |
| Rise Time               | 75s                                                                                  |          |                |
| Max. Load per Platform  | 7,000 lbs.                                                                           |          |                |
| ALI® Certified          |   |          |                |
| Available Colors        |  |          |                |

## 5K MEDIUM-DUTY MOBILE COLUMN

## CLMM-5000

| MODEL NUMBER                              | CLMM-5000                                                                           |
|-------------------------------------------|-------------------------------------------------------------------------------------|
| Description                               | Medium-Duty                                                                         |
| Lifting Capacity                          | 5,000 lbs.                                                                          |
| Height of Lift Unit                       | 88½"                                                                                |
| Overall Height of Lift Unit at Full Rise  | 13' 1⅞"                                                                             |
| Width of Lift Unit                        | 38½"                                                                                |
| Length of Lift Unit                       | 46¾"                                                                                |
| Max. Lift Height (with 4 units)           | 69"                                                                                 |
| Max. Lift Height (with 2 units)           | -                                                                                   |
| Wheel Diameter                            | Min. 6" - Max. 22"                                                                  |
| Max. Hydraulic System Operating Pressure  | 2,500 psi                                                                           |
| Lift Speed (Max. Load)                    | 92" per minute                                                                      |
| Weight of Lift Unit                       | 870 lbs.                                                                            |
| Footprint of Lift Unit                    | 450 sq. in.                                                                         |
| Ground Pressure for each Lift (Max. Load) | 13 psi                                                                              |
| Turning Radius of Lift Unit               | 50½"                                                                                |
| Operating Peak Power                      | 4HP                                                                                 |
| Operating Voltage                         | 24 VDC Nominal                                                                      |
| Charger Voltage Required                  | 120-240 VAC @ 60 Hz                                                                 |
| Charger Amps Required                     | 2.8 amps                                                                            |
| ALI® Certified                            |  |
| Available Colors                          |  |

## 12.5K EXTENDED FORKS MOBILE COLUMN CLHM-125-XF

| MODEL NUMBER                             | CLHM-125-XF                                                                           |
|------------------------------------------|---------------------------------------------------------------------------------------|
| Lifting Capacity                         | 12,500 lbs.                                                                           |
| Height of Lift Unit                      | 88½"                                                                                  |
| Overall Height at Full Rise              | 13' ⅞"                                                                                |
| Width of Lift Unit                       | 44¼"                                                                                  |
| Length of Lift Unit                      | 65⅝"                                                                                  |
| Max. Lift Height 4+ Units                | 69"                                                                                   |
| Max. Lift Height (with 2 units)          | 32"                                                                                   |
| Wheel Diameter                           | Min. 5" - Max. 24½"                                                                   |
| Max. Hydraulic System Operating Pressure | 2,100 psi                                                                             |
| Lift Speed (Max. Load)                   | 56¾" per minute                                                                       |
| Weight of Lift Unit                      | 1,557 lbs.                                                                            |
| Footprint of Lift Unit                   | 719 sq. in.                                                                           |
| Ground Pressure/Lift (Max. Load)         | 19.6 psi                                                                              |
| Turning Radius of Lift Unit              | 54"                                                                                   |
| Operating Peak Power                     | 4HP                                                                                   |
| Operating Voltage 2                      | 4 VDC Nominal                                                                         |
| Charger Voltage Required                 | 120-240 VAC @ 50-60 Hz                                                                |
| Charger Amps Required                    | 2.8 amps                                                                              |
| ALI® Certified                           |  |
| Available Colors                         |  |



## 14K / 19K HEAVY-DUTY MOBILE COLUMN

## CLHM-140 / CLHM-190 / CLHM-190W


| MODEL NUMBER                              | CLHM-140                                                                              | CLHM-190                                   | CLHM-190W       |
|-------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| Description                               | Heavy-Duty                                                                            |                                            | Wide Heavy-Duty |
| Lifting Capacity                          | 14,000 lbs.                                                                           | 19,000 lbs.                                |                 |
| Height of Lift Unit                       | 88 1½"                                                                                |                                            |                 |
| Overall Height of Lift Unit at Full Rise  | 157⅞"                                                                                 |                                            |                 |
| Width of Lift Unit                        | 44¼"                                                                                  |                                            | 49"             |
| Length of Lift Unit                       | 53⅝"                                                                                  |                                            |                 |
| Max. Lift Height (with 4 units)           | 69"                                                                                   |                                            |                 |
| Max. Lift Height (with 2 units)           | 32"                                                                                   |                                            |                 |
| Wheel Diameter                            | Min. 5" - Max. 24½"                                                                   | Min. 4" - Max. Determined by Tire Diameter |                 |
| Max. Hydraulic System Operating Pressure  | 2,180 psi                                                                             | 2,600 psi                                  |                 |
| Lift Speed (Max. Load)                    | 60" per minute                                                                        |                                            |                 |
| Weight of Lift Unit                       | 1,485 lbs.                                                                            | 1,510 lbs.                                 | 1,575 lbs.      |
| Footprint of Lift Unit                    | 650 sq. in.                                                                           |                                            | 705 sq. in.     |
| Ground Pressure for each Lift (Max. Load) | 23.8 psi                                                                              | 31.6 psi                                   | 29.2 psi        |
| Turning Radius of Lift Unit               | 47"                                                                                   |                                            |                 |
| Operating Peak Power                      | 4HP                                                                                   |                                            |                 |
| Operating Voltage                         | 24 VDC Nominal                                                                        |                                            |                 |
| Charger Voltage Required                  | 120-240 VAC @ 50-60 Hz                                                                |                                            |                 |
| Charger Amps Required                     | 2.3 amps                                                                              |                                            |                 |
| ALI® Certified                            |  |                                            |                 |
| Available Colors                          |  |                                            |                 |

## HEAVY-DUTY WHEEL LIFT SYSTEM

## CLHM-MR20 / CLHM-MR30 / CLHM-MR40

| MODEL NUMBER                         | CLHM-MR20                                                                             | CLHM-MR30   | CLHM-MR40   |
|--------------------------------------|---------------------------------------------------------------------------------------|-------------|-------------|
| Lifting Capacity (per pair)          | 20,000 lbs.                                                                           | 30,000 lbs. | 40,000 lbs. |
| Lift Height                          | Min. Floor Level - Max. 30"                                                           |             |             |
| Power                                | Compressed Air                                                                        |             |             |
| Max. Air Pressure                    | 160 psi                                                                               |             | 155 psi     |
| Stroke                               | 30"                                                                                   |             |             |
| Min. Wheel Diameter with Adapters    | 16"                                                                                   |             | 14"         |
| Min. Wheel Diameter without Adapters | 19"                                                                                   |             | 21"         |
| Max. Tire Diameter                   | 44"                                                                                   |             | 45"         |
| Overall Width                        | 42 ¼"                                                                                 | 45"         |             |
| Overall Depth                        | 43 1¼"                                                                                | 44"         |             |
| Overall Height                       | 58 ¾"                                                                                 | 59"         | 63"         |
| Shipping Weight                      | 1,200 lbs.                                                                            | 1,500 lbs.  | 1,965 lbs.  |
| Available Colors                     |  |             |             |

# REGIONAL SALES MANAGERS

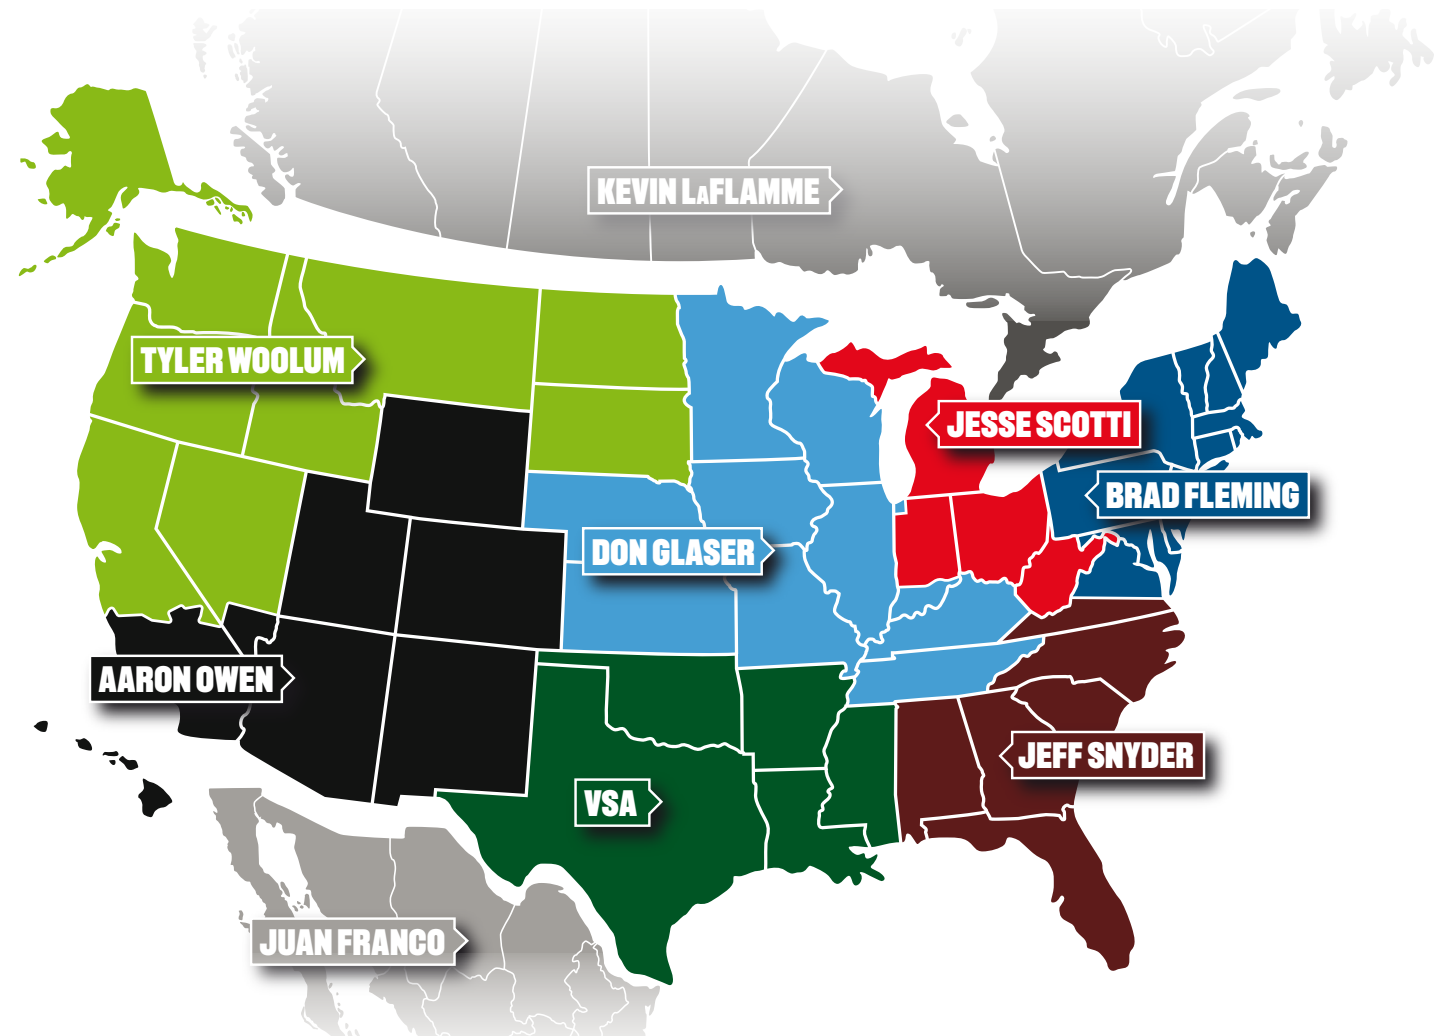

**TYLER WOOLUM**  
408-314-2129  
tylerw@challengerlifts.com



**KEVIN LaFLAMME**  
+1 226-750-7249  
kevinl@challengerlifts.com



**JESSE SCOTTI**  
502-523-1522  
jesses@challengerlifts.com



**AARON OWEN**  
480-684-4036  
aaronow@challengerlifts.com



**DON GLASER**  
847-975-7358  
donauldg@challengerlifts.com



**BRAD FLEMING**  
610-731-5267  
bradleyf@challengerlifts.com



**JUAN FRANCO**  
305-205-0940  
+57 310 2481112 (COL)  
office: +57 601408561 (COL)  
juan.e.franco@snapon.com



**VSA**  
214-353-0765  
tcole@vsareps.com




**JEFF SNYDER**  
770-490-8415  
jsnyder@challengerlifts.com



**CUSTOMER CARE & SERVICE**  
800-648-5438  
challengerlifts@soe.freshdesk.com



**PROUD  
ALI MEMBER**

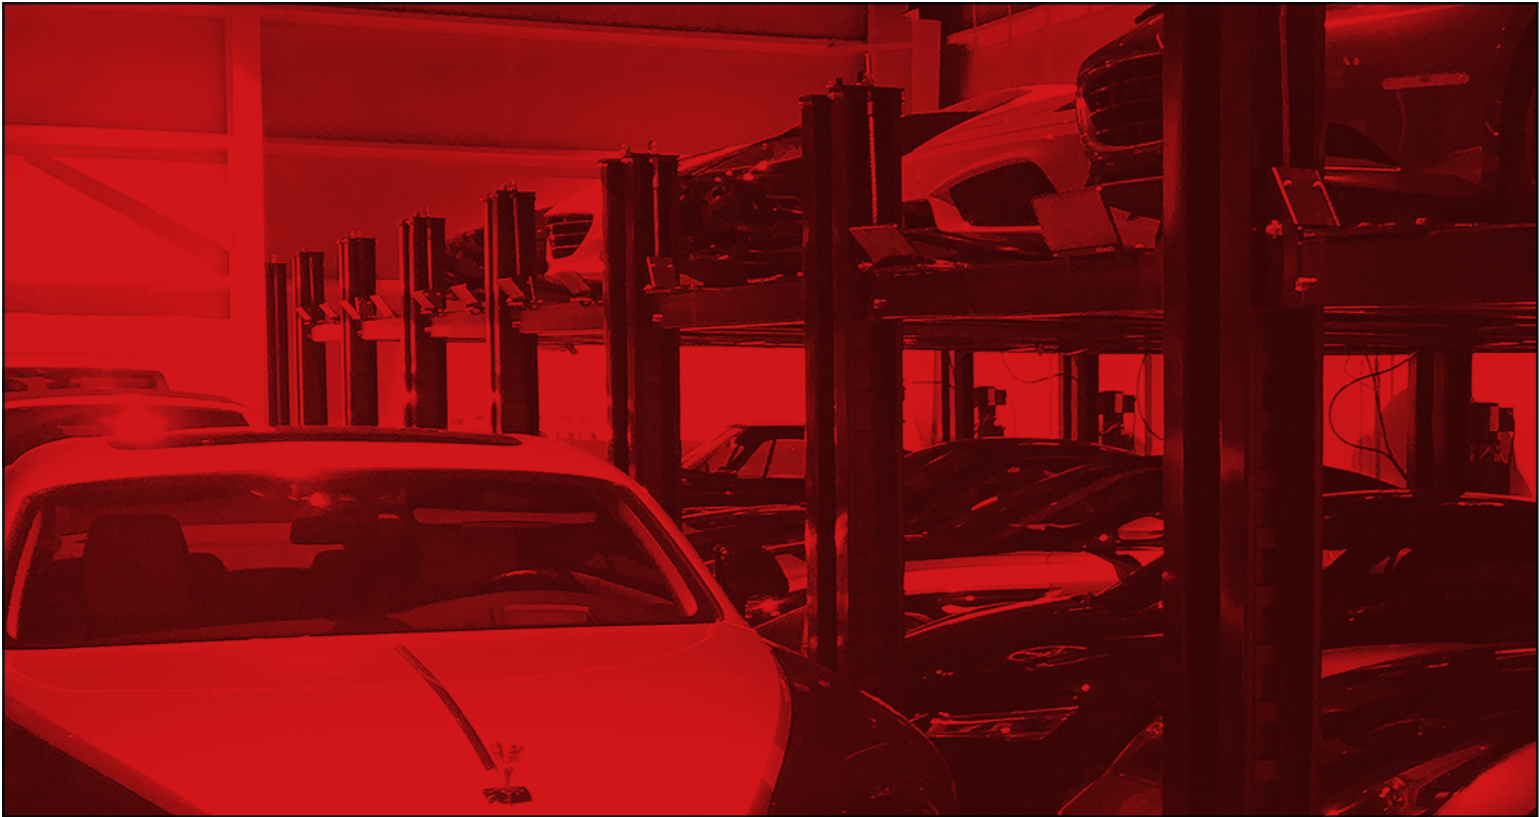

[challengerlifts.com](http://challengerlifts.com)



Snap-on® Total Shop Solutions offers a wide range of garage equipment solutions for workshops, garages, car dealers and tire shops, thanks to the specific solutions provided by its portfolio of premium brands. Challenger Lifts is a brand of TSS and is committed to product innovation and improvement. Therefore, specifications listed in this sell sheet may change without notice. ©2026 Snap-on Incorporated. Challenger Lifts is a trademark, in the United States and other countries, of Snap-on Incorporated. All rights reserved. All other marks are marks of their respective holders. ssmi22435e CL-pro-line-catalog 09/2026

