

CL Challenger Lifts

HD

LINE

HEAVY-DUTY LIFTING SOLUTIONS

2025



ADJUSTABLE HEAVY DUTY 2-POST LIFTS



All our HD 2-Posts come standard with the ability to **adjust the width and height during installation to suit your shop's needs.**

12K 2-POST

MODEL # CL12A

FULL SPECIFICATIONS PG. 10

With adjustable width and 12,000 lbs. capacity, the CL12A can **accommodate a variety of vehicles, from compact cars to full-size trucks and commercial vehicles.**

Spot vehicles faster with 3-Stage Arms and telescoping footpads. Service taller vehicles with optional 1' (# 12702-1) and 2' (# 12702-2) Column Extensions.

12K LOW-CEILING 2-POST

MODEL # CL12A-LC

All the power of our CL12A but can be installed in shops with 12' ceilings **due to a shortened column height of 11'11".**

NEW!

**EV SERVICE
READY**

INSTALLED AT WIDEST
SETTING & EQUIPPED
WITH TFPK FOOTPADS



REQUIREMENTS



13' 3" MINIMUM



14' RECOMMENDED



24' RECOMMENDED



208-230V, 1PH, 30A




MODEL # CL12A-LC



MODEL # CL12A

11' 10"



12' 4"



12' 10"



WIDTH ADJUSTMENT FOR CL12A & CL12A-LC

16K 2-POST

MODEL # CL16-3S & CL16-2-3S
FULL SPECIFICATIONS PG. 10

This 16,000 lbs. 2-Post Lift boasts optimum flexibility and meets ALI®/ANSI® safety standards.

It features **adjustable column extensions to accommodate three settings for height**, from 13'6" to 14'6", or add 2' column extensions to go from 15'6" to 16'6".

Standard features include 3-Stage Front and Rear Arms and low-profile arm supports for a full swing.

REQUIREMENTS

	13' 8" MINIMUM
	16' RECOMMENDED
	26' RECOMMENDED
	208-230V, 1PH, 30A
	90-120 PSI



STACK ADAPTER KIT

PART # 10315

(4) 3" Stack Adapters
PART # B2206-3

(2) 6" Stack Adapters
PART # 10313

(2) Organizer Racks
PART # 10316

INCLUDED WITH ALL CL12 & CL16 LIFTS, ALSO SOLD SEPARATELY.



EV SERVICE READY

INSTALLED AT WIDEST SETTING & EQUIPPED WITH TFPK FOOTPADS



MODEL # CL16-3S

20K 2-POST

MODEL # CL20 & CL20-2
FULL SPECIFICATIONS PG. 10

Engineered to be wider, taller, and more robust to tackle the heaviest vehicles in your fleet, up to 20,000 lbs.

Equipped with 2-Stage Arms, this lift also features **adjustable column extensions, adjustable width, and the ability to add optional 2' column extensions** for taller vehicles.



MODEL # CL20

STACK ADAPTERS



(1) 8" Stack Adapter
PART # B12068



(1) 4" Stack Adapter
PART # B12069

INCLUDED WITH ALL CL20 LIFTS, ALSO SOLD SEPARATELY.

REQUIREMENTS

	13' 8" MINIMUM
	16' RECOMMENDED
	28' RECOMMENDED
	208-230V, 1PH, 30A
	90-120 PSI



WIDTH ADJUSTMENT FOR CL16 & CL20

4-POST LIFTS

Our 4-Post Lifts deliver **everything you need to expand your shop offerings to commercial service**, with lift capacities starting at 15,000 lbs. to a maximum of 60,000 lbs.

18K HEAVY-DUTY 4-POST



MODEL # 44018

FULL SPECIFICATIONS PG. 11

Features include a high tensile strength leaf chain and sealed roller bearings for maximum reliability and productivity.

General service vehicles up to **18,000 lbs.** with wheelbases from **194" to 230"** and align vehicles up to **236"** in maximum wheelbase.



REQUIREMENTS



78" +VEHICLE



14' RECOMMENDED



24' RECOMMENDED



208-230V, 1PH, 30A

18K HEAVY-DUTY 4-POST

MODEL # 4018XFX

FULL SPECIFICATIONS PG. 11

This **ALI® Certified** Flat Deck 4-Post Lift is a perfect fit for shops servicing vehicles up to 18,000 lbs.

It features a **proven cable design**, **single-point mechanical lock release**, and **24" wide runways**.

ALIGNMENT RACK UPGRADE
NOT AVAILABLE FOR 4018XFX



REQUIREMENTS



78" +VEHICLE



14' RECOMMENDED



24' RECOMMENDED



208-230V, 1PH, 30A

UPGRADE

MODEL # 4018XFX-PKG

Comes with (2) 9K Rolling Jacks
w/18K Airline Kit

30K HEAVY-DUTY 4-POST



MODEL # 4030

FULL SPECIFICATIONS PG. 11

With a general service or alignment version and three options in length, our 30,000 lbs. Heavy Duty 4-Post Lift is no understatement.

The cable and cylinder system with steel sheaves make the HD design and provide durability. **Non-skid louvered approach ramps and a built-in runway rail system bring versatility to any workspace.**


Service vehicles up to a maximum wheelbase of **317"** and **perform 2-wheel alignment on vehicles up to 292"** maximum wheelbase.



MODEL # 4030



ALIGNMENT RACK UPGRADE



Wheel alignment is one of the most profitable services available to an automotive shop, and our **Alignment Rack Upgrade** provides maximum productivity in any configuration.

(2) Stainless Steel Turn Plates
(2) Fold-Down Wheel Stops
(2) Work Steps

(2) Rolling Jacks
(1) Airline Kit

ALIGNMENT RACK UPGRADE **NOT AVAILABLE** FOR 4018XF

REQUIREMENTS

-  **12' MINIMUM**
-  **17' RECOMMENDED**
-  **28' RECOMMENDED**
-  **208-230V, 1PH, 30A**
-  **90-120 PSI**

HEAVY-DUTY CHAIN-DRIVEN 4-POST

MODEL # 44030, 44040, 44050, 44060

FULL SPECIFICATIONS PG. 12

Our Heavy-Duty, Chain-Driven 4-Post Lifts are designed to provide economic, high-capacity lifting solutions that accommodate a wide range of heavier vehicles from 30,000-60,000 lbs.

The dual heavy-duty lift cylinders and lever controls provide variable or synchronous power to the front and/or rear suspension of the lift, ideal for lifting large axle vehicles with heavier front or rear ends, including waste trucks and other construction trucks.



MAKE THE MOST OF YOUR 4-POST

ADD ROLLING JACKS FOR A COMPLETE INSTALL



MODEL # 44060

REQUIREMENTS

-  **13' MINIMUM**
-  **19' RECOMMENDED**
-  **38' RECOMMENDED**
-  **208-230V, 1PH, 30A**

FOR CHAIN-DRIVE 4-POST SPECIFICATIONS, VISIT CHALLENGERLIFTS.COM

MOBILE COLUMN LIFTS



Our Mobile Columns provide the flexibility and convenience to lift any rubber-tired vehicle, within rated capacity, **without the need for pits, cables or compressed air.**

NEW!



MODEL # CLMM-5000

5K MEDIUM-DUTY

MODEL # CLMM-500
FULL SPECIFICATIONS PG. 12

Capable of lifting 20,000 lbs. on any solid surface. Built with heavy-duty tow handles and spring-loaded, caster wheels. These mobile columns are perfect for servicing EVs.

REQUIREMENTS

-  **14'8" MINIMUM**
-  **14' RECOMMENDED**
-  **28' RECOMMENDED**
-  **110V FOR CHARGING**

12.5K EXTENDED FORKS

MODEL # CLHM-125-XF
FULL SPECIFICATIONS PG. 12

These lifts offer a versatile, scalable, and efficient solution to vehicle lifting operations with a 12,500 lbs. capacity per column. The standard 22" forks allow for full tire engagement on vehicles with recessed wheels or dual tires and accommodate wheel diameters from 5"-24.5".

A maximum of eight lifts work in tandem or used in combination with our 14K/19K models.



REQUIREMENTS

-  **14'8" MINIMUM**
-  **14' RECOMMENDED**
-  **28' RECOMMENDED**
-  **120-240 VAC @ 50-60 HZ**



MODEL # CLHM-125-XF

14 & 19K HEAVY-DUTY

MODEL # CLHM-140, CLHM-190, CLHM-190W
FULL SPECIFICATIONS PG. 13

Our HD Mobile Columns are capable of lifting vehicles of any axle length or wheelbase up to **14,000 or 19,000 lbs. per column** on any solid surface.

Built with a heavy-duty tow handle for comfortable maneuverability.

LIFT ANY 2-, 3-, OR 4-AXLE RUBBER-TIRE VEHICLE
UP TO 152,000 LBS.
WITH 8 HD COLUMNS CONNECTED



**INTEGRATED TOUCH SCREEN
CONTROL CONSOLE AT
EACH COLUMN**

MODEL # CLHM-140

REQUIREMENTS

-  **14'8" MINIMUM**
-  **14' RECOMMENDED**
-  **28' RECOMMENDED**
-  **110V FOR CHARGING**



**CONNECT UP
TO 6 OR 8 HD
COLUMNS
WIRELESS.**

MODEL #
CLHM-MR30

HEAVY-DUTY WHEEL LIFTS

MODEL # CLHM-MR20, CLHM-MR30, AND CLHM-MR40
FULL SPECIFICATIONS PG. 13

Capable of lifting 20, 30, or 40,000 lbs. per pair, expect years of worry-free, maintenance-free lifting with this air-operated system. Comprised of two individual lifts, the pair work to lift one end of a vehicle at a time.

Perfect for low ceiling shops, significant component removal, and eliminating the need to remove aerodynamic body panels from vehicles.

REQUIREMENTS


-  **14'8" MINIMUM**
-  **12'3" RECOMMENDED**
-  **28' RECOMMENDED**

HEAVY-DUTY ADAPTERS


Designed to help your technicians **service vehicle types**, like **forklifts & multiple rear-axle**, more efficiently.
NOT COMPATIBLE WITH CLMM-5000 OR CLHM-125-XF.



WING PLOW ADAPTER
PART # CLHM-SP-240
24K lbs. capacity adapter for vehicles with components that could obstruct the column lift.

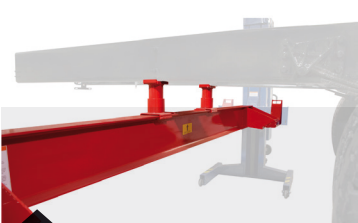


CROSS-BEAM ADAPTER
PART # CLHM-CB-32A
32K lbs. capacity adapter to lift heavy-duty vehicles by the frame rails.

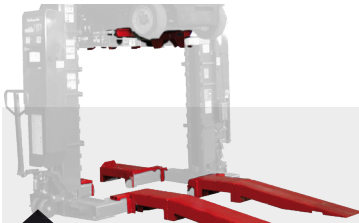

FORK LIFT ADAPTER
PART # CLHM-FLA
15K lbs. capacity adapter to raise fork lifts 64".



END LIFT ADAPTER
PART # CLHM-ELA-90A
9K lbs. capacity adapter designed to lift Humvees® specifically.

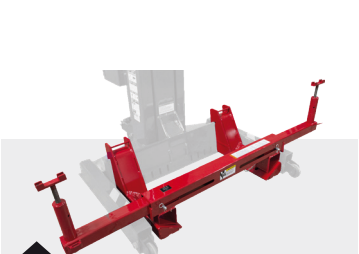

CAB-OFF ADAPTER
PART # CLHM-CA-15
For CLHM190 / CLHM140
PART # 957-00036
For CLMM5000
Adjustable length adapter to lift cabs off 2- and 4-door truck frames.



REAR AXLE RESTRAINT
PART # CLHM-RAR-20
2K lbs. capacity restraint multiple rear axle vehicles, to support unengaged axle.


ADDITIONAL UPGRADES



MAGNETIC LIGHT KIT
PART # CLHM-LS-LK
Two magnetic lights that are powered by the mobile column.



GLARE SCREEN
PART # CLHM-GS
Reduces glare and protects the screen from worksite dirt.

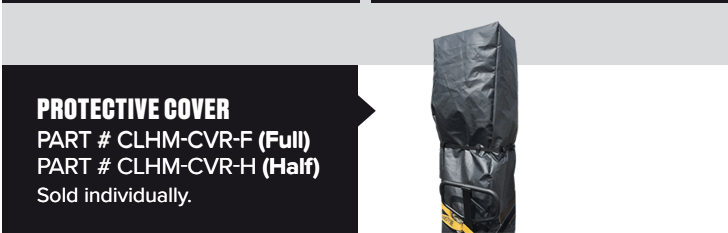

PROTECTIVE COVER
PART # CLHM-CVR-F (Full)
PART # CLHM-CVR-H (Half)
Sold individually.

SUPPORT STANDS

PART #	DESCRIPTION	ADJUST.	CAPACITY	SOLD IN
CLHM-10-TH	Short Stand	20"-32" (1" increments)	20K lbs. ea.	Set of 2
CLHM-10-THF	Medium Stand	30"-52" (1" increments)	20K lbs. ea.	Set of 2
CLHM-7-THR	High-Rise Stand	53"-72" (2.75" increments)	14K lbs. ea.	Single Unit
CLHM-10-THR	High-Rise Stand w/Gas Assist	49"-83" (2.75" increments)	20K lbs. ea.	Single Unit
CLHM-9-THR	High-Rise Stand w/Gas Assist	46.75"-84"	18K lbs. ea.	Single Unit



MODEL #
CLHM-10-TH



MODEL #
CLHM-10-THF



MODEL #
CLHM-10-THR



HEAVY-DUTY SHOP EQUIPMENT

Challenger Lifts offers a wide range of heavy-duty shop equipment to meet your needs. Our products are made from high-quality materials, ensuring durability, and are sure to meet your needs and exceed your expectations.



ENGINE STAND

PART # CLHM-ES-2000

2K lbs. capacity, adjustable platform, 360°-rotation locking wheels.



TRANSMISSION JACK

PART # CLHM-HTCJ-2000

2.7K lbs. capacity, 72" max height, 360° rotating head, retractable tow handle.



DISC BRAKE DOLLY

PART # CLHM-200

One-person operation for removing calipers and disc brake hubs.



HI-RISE TRANSMISSION JACK

PART # CLHM-HTJ-1000

1K lbs. capacity, four quick-ratcheting brackets.



6K FLOOR JACK

PART # CLHM-FSJ-60Q

6K lbs. capacity, double-plunger design for quicker lift and longer stroke.



SHOP CRANE

PART # CLHM-SC-220

2.2K lbs. capacity, folds for compact storage.



F550 WHEEL END ADAPTER

PART # CLHM-F550

Adapter for Ford® F550 Model Trucks; for use with CLHM-200.



TRANS JACK ADAPTER

PART # CLHM-90

Adapter for easy removal of transmission, for use with CLHM-HTJ-1000.



DIFFERENTIAL ADAPTER

PART # CLHM-HD-DA

Heavy-duty adapters for use with CLHM-HTCJ-2000.



SPECIFICATIONS

12K / 12K LOW-CEILING 2-POST CL12A / CL12A-LC

MODEL NUMBER	CL12A	CL12A-1	CL12A-2	CL12A-DPC-QC	CL12A-LC	CL12A-LC-DPC-QC
Description	12K				12K Low-Ceiling	
Version	Standard	w/ 1' Extensions	w/ 2' Extensions	w/ DPC & QuickCycle™		w/ DPC & QuickCycle™
Lifting Capacity	12,000 lbs.					
Lift Configuration	Symmetric					
Arm Configuration	3-Stage Front & Rear					
Rise Height	84¾"				80¾"	
Overall Height	13' 8" or 13' 2"	14' 8" or 14' 2"	15' 8" or 15' 2"	13' 8" or 13' 2"	11' 11"	
Overall Width	Standard: 11' 10" +6": 12' 4" +12": 12' 10"					
Drive Thru Clearance	Standard: 8' 7½" +6": 9' 1½" +12": 9' 7½"					
Floor to Overhead Switch	13' 2" or 12' 8"	14' 2" or 13' 8"	15' 2" or 14' 8"	13' 2" or 12' 8"	11' 4½"	
Arm Reach	Min. 27½" Max. 59"					
Screw Pad Height	Min. 4¾" Max. 12⅝" (includes 6" stack adapter)					
Motor / Voltage	2HP, 208v-230v, 60Hz, 1Ph			3HP, 208v-230v, 60Hz, 1Ph	2HP, 208v-230v, 60Hz, 1Ph	3HP, 208v-230v, 60Hz, 1Ph
Rise Time	63s			40s	60s	38s
Min. Ceiling Height	13' 9" or 13' 3"	14' 9" or 14' 3"	15' 9" or 15' 3"	13' 9" or 13' 3"	12'	
ALI® Certified						
Available Colors	  					

16K / 20K 2-POST CL16 / CL20

MODEL NUMBER	CL16-0-3S	CL16-2-3S	CL20-0	CL20-2
Description	16K Standard	16K Extended Height	20K Standard	20K Extended Height
Lifting Capacity	16,000 lbs.		20,000 lbs.	
Lift Configuration	Symmetric			
Arm Configuration	3-Stage Front & Rear		2-Stage Front & Rear	
Max. Load Per Arm	4,000 lbs.		5,000 lbs.	
Rise Height	Min. 75½" Max. 81½" (w/ stack adapter)		Min. 76⅞" Max. 84⅞" (w/ stack adapter)	
Overall Height Options	13' 6" 14' 14'6"	15'6" 16' 16'6"	13'6" 14' 14'6"	15'6" 16' 16'6"
Overall Width Options	13' 10¾" 13' 4¾" 12' 10¾"			
Drive-Thru Clearance	8' 8¼" 9' 2¼" 9' 8¼"	8' 8¼" 9' 2¼" 9' 8¼"	8' 8¼" 9' 2¼" 9' 8¼"	8' 8¼" 9' 2¼" 9' 8¼"
Floor to Overhead Switch	12' 11" 13' 5" 13' 11"	14' 11" 15' 5" 15' 11"	12' 11" 13' 5" 13' 11"	14' 11" 15' 5" 15' 11"
Arm Reach	Min. 36⅝" Max. 75"		Min. 38½" Max. 62"	
Screw Pad Height	Min. 5" Max. 6½"		Min. 6⅜" Max. 7⅞"	
Between Columns	Standard: 10' +6": 10' 6" +12": 11'			
Motor / Voltage	3HP, 208-230v, 60Hz, 1Ph			
Air Supply Required	90-120 psi			
Rise Time	62s			
Min. Ceiling Height Required	13' 8" 14' 2" 14' 8"	15' 8" 16' 2" 16' 8"	13' 8" 14' 2" 14' 8"	15' 8" 16' 2" 16' 8"
ALI® Certified				
Available Colors	  			

18K 4-POST ALIGNMENT 44018

MODEL NUMBER	44018	44018E	44018AR
Description	Standard	Extended	Alignment
Lifting Capacity	18,000 lbs.		
Max. Wheelbase	194" / 16' 2"	230" / 19' 2"	236" / 19' 2"
Rise Height	78 ¾"		83¼"
Overall Length	21' 7"	24' 4"	25' 11½"
Overall Width	11' 6⅝"		11' 91½"
Inside Columns	10' 1"		10' 2"
Between Columns	16' 1"	19' 1"	15' 10"
Overall Height	8' 6 ½"		
Height of Runways	7 ¼"		11 ⅞"
Width of Runways	22"		
Width Between Runways	36" - 54"		
Standard Motor/Voltage	3HP, 208v-230v, 60Hz, 1Ph		
Required Amps	30		
Rise Time	60s		
Available Colors			

18K HEAVY-DUTY 4-POST 4018

MODEL NUMBER	4018XFX
Lifting Capacity	18,000 lbs.
Max. Wheelbase	220"
Rise Height	72"
Overall Length	303¾"
Overall Width	152⅛"
Inside Columns	128⅓⅙"
Between Columns	229⅛"
Overall Height	98⅝"
Height of Runways	9½"
Width of Runways	24"
Width Between Runways	40"
Standard Motor/Voltage	208v-230v, 60Hz, 1Ph
Required Amps	23
Rise Time	70s
ALI® Certified	
Available Colors	

30K 4-POST ALIGNMENT 4030

MODEL NUMBER	4030SFX	4030SAX	4030EFX	4030EAX	4030XFX	4030XAX
Deck Type	Flat Deck	Alignment Deck	Flat Deck	Alignment Deck	Flat Deck	Alignment Deck
Description	Standard		Extended		Extra Extended	
Lifting Capacity	30,000 lbs.					
Max. Wheelbase	244½"		281"		317"	
Max. 2-Wheel Alignment	NA	219½"	NA	256"	NA	292"
Rise Height	71 ¾"					
Overall Length	25' 8"		28' 8"		31' 8"	
Overall Width	14' 4 ¾"					
Inside Columns	12' 8"					
Between Columns	20' 6"		23' 6½"		26' 6 ½"	
Height of Columns	92 ¼"					
Height of Runways	10"					
Width of Runways	24"					
Width Between Runways	46" - 52"					
Air Supply Required	90-120 psi					
Standard Motor/Voltage	3HP, 208v-230v, 60Hz, 1Ph					
Rise Time	126s					
Min. Required Bay Size	28' x 17'		31' x 17'		34' x 17'	
ALI® Certified						
Available Colors						

SPECIFICATIONS

30-60K CHAIN-DRIVE 4-POST

44030 / 44040 / 44050 / 44060

MODEL NUMBER	44030 / E / EAR / X	44040 / E / X	44050 / E / X	44060 / X
Lifting Capacity	30,000 lbs.	40,000 lbs.	50,000 lbs.	60,000 lbs.
Max Wheelbase	230" / 290" / 290" / 350"	310" / 370" / 430"		
Max. 2-Wheel Alignment	NA / NA / 266" / NA	NA		
Rise Height	68"	73"		
Overall Length	24' 7.5" / 29 7.5" / 29 7.5"/ 34' 7.5"	36' / 41' / 46'		
Overall Width	12' 5.5"	17' 1.25"		
Inside Columns	132.5"	144"		
Between Columns	233.75" / 293.75" / 293.75" / 353.75"	290" / 350" / 410"		
Overall Height	92"			
Height of Runways	9"	14"		
Width of Runways	24"	32"		
Width Between Runways	54" - 75"	36" - 58"		
Standard Motor / Voltage	3HP, 208-230v, 1Ph	10HP, 230-460v, 3Ph	15HP, 230-460v, 3Ph	
Required Amps	30			
Rise Time	105s	70s	75s	
Available Colors				

5K MEDIUM-DUTY MOBILE COLUMN CLMM-5000

MODEL NUMBER	CLMM-5000
Description	Medium-Duty
Lifting Capacity	5,000 lbs.
Height of Lift Unit	88½"
Overall Height of Lift Unit at Full Rise	13' 1½"
Width of Lift Unit	38½"
Length of Lift Unit	46¾"
Max. Lift Height (with 4 units)	69"
Max. Lift Height (with 2 units)	-
Wheel Diameter	Min. 6" - Max. 22"
Max. Hydraulic System Operating Pressure	2,230 psi
Lift Speed (Max. Load)	60" per minute
Weight of Lift Unit	870 lbs.
Footprint of Lift Unit	450 sq. in.
Ground Pressure for each Lift (Max. Load)	13 psi
Turning Radius of Lift Unit	50½"
Operating Peak Power	4HP
Operating Voltage	24 VDC Nominal
Charger Voltage Required	120-240 VAC @ 60 Hz
Charger Amps Required	2.8 amps
ALI® Certified	
Available Colors	

12.5K EXTENDED FORKS MOBILE COLUMN CLHM-125-XF

MODEL NUMBER	CLHM-125-XF
Lifting Capacity	12,500 lbs.
Height of Lift Unit	88½"
Overall Height at Full Rise	13' 1½"
Width of Lift Unit	44¼"
Length of Lift Unit	65⅝"
Max. Lift Height 4+ Units	69"
Max. Lift Height (with 2 units)	32"
Wheel Diameter	Min. 5" - Max. 24½"
Max. Hydraulic System Operating Pressure	2,100 psi
Lift Speed (Max. Load)	56¾" per minute
Weight of Lift Unit	1,557 lbs.
Footprint of Lift Unit	719 sq. in.
Ground Pressure/Lift (Max. Load)	19.6 psi
Turning Radius of Lift Unit	54"
Operating Peak Power	4HP
Operating Voltage	24 VDC Nominal
Charger Voltage Required	120-240 VAC @ 50-60 Hz
Charger Amps Required	2.8 amps
ALI® Certified	
Available Colors	

14K / 19K HEAVY-DUTY MOBILE COLUMN

CLHM-140 / CLHM-190 / CLHM-190W


MODEL NUMBER	CLHM-140	CLHM-190	CLHM-190W
Description	Heavy-Duty		Wide Heavy-Duty
Lifting Capacity	14,000 lbs.	19,000 lbs.	
Height of Lift Unit	88 1½"		
Overall Height of Lift Unit at Full Rise	13' 1⅛"		
Width of Lift Unit	44¼"		
Length of Lift Unit	53⅝"		
Max. Lift Height (with 4 units)	69"		
Max. Lift Height (with 2 units)	32"		
Wheel Diameter	Min. 5" - Max. 24½"	Min. 4" - Max. Determined by Tire Diameter	
Max. Hydraulic System Operating Pressure	2,180 psi	2,600 psi	
Lift Speed (Max. Load)	60" per minute		
Weight of Lift Unit	1,485 lbs.	1,510 lbs.	1,575 lbs.
Footprint of Lift Unit	650 sq. in.	705 sq. in.	
Ground Pressure for each Lift (Max. Load)	23.8 psi	31.6 psi	29.2 psi
Turning Radius of Lift Unit	47"		
Operating Peak Power	4HP		
Operating Voltage	24 VDC Nominal		
Charger Voltage Required	120 VAC @ 60 Hz		122 VAC @ 60 Hz
Charger Amps Required	2.3 amps		
ALI® Certified			
Available Colors			

HEAVY-DUTY WHEEL LIFT SYSTEM

CLHM-MR20 / CLHM-MR30 / CLHM-MR40

MODEL NUMBER	CLHM-MR20	CLHM-MR30	CLHM-MR40
Lifting Capacity (per pair)	20,000 lbs.	30,000 lbs.	40,000 lbs.
Lift Height	Min. Floor Level - Max. 30"		
Power	Compressed Air		
Max. Air Pressure	160 psi		155 psi
Stroke	30"		
Min. Wheel Diameter with Adapters	16"		14"
Min. Wheel Diameter without Adapters	19"		21"
Max. Tire Diameter	44"		45"
Overall Width	42 1/4"	45"	
Overall Depth	43 1/4"	44"	
Overall Height	58 3/4"	59"	63"
Shipping Weight	1,200 lbs.	1,500 lbs.	1,965 lbs.
Available Colors			

Regional Sales Managers

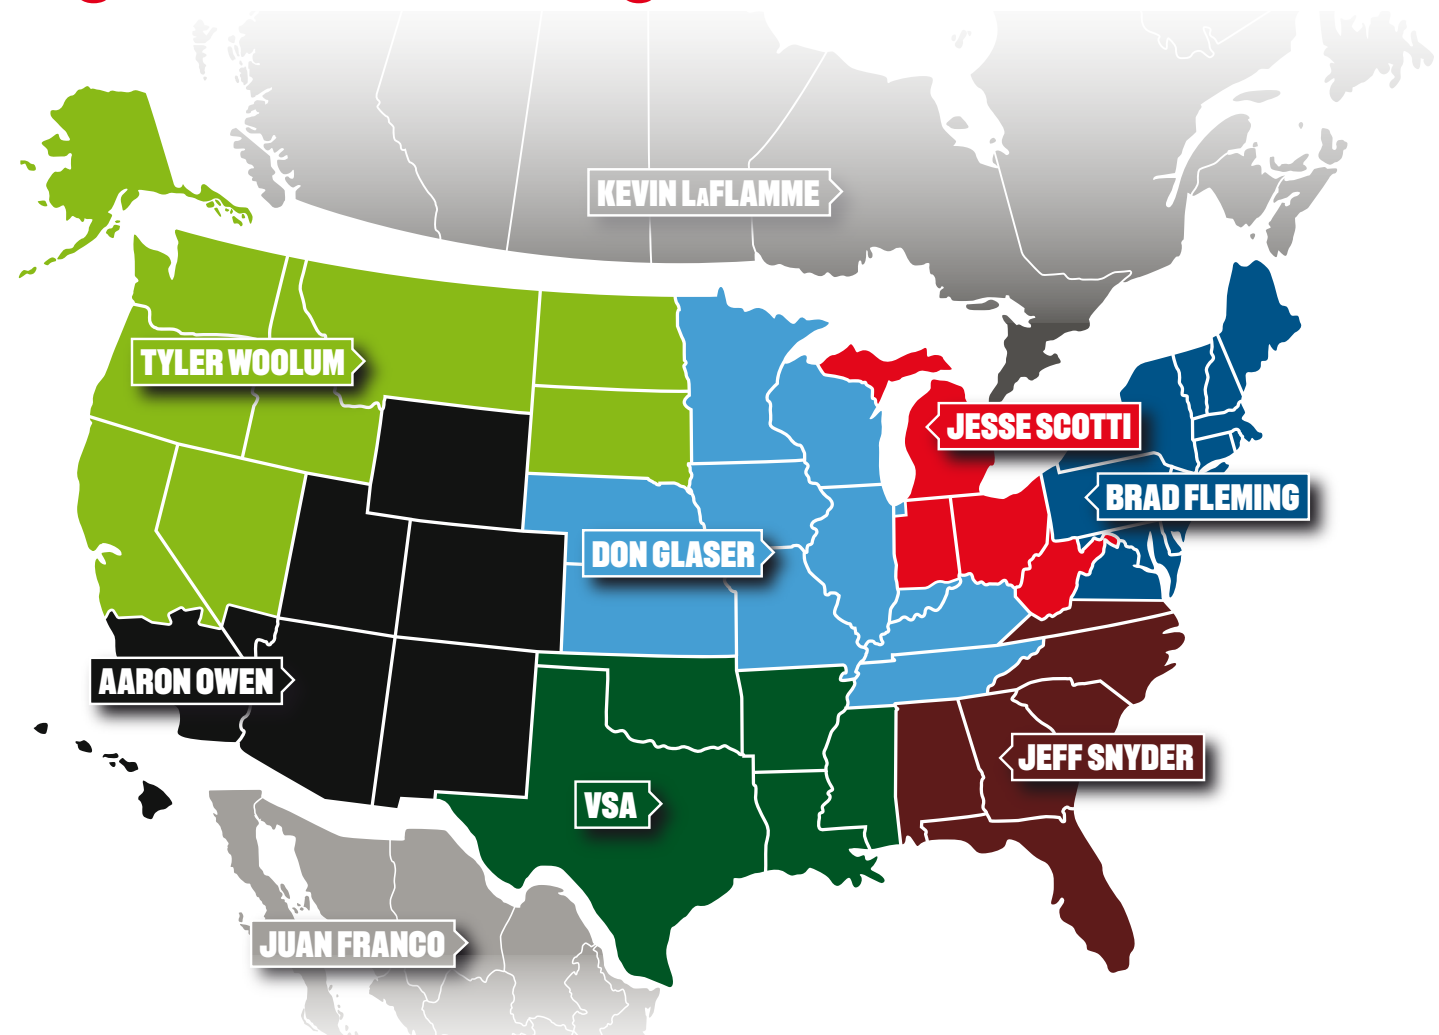

TYLER WOOLUM
408-314-2129
tylerw@challengerlifts.com



KEVIN LaFLAMME
+1 226-750-7249
kevinl@challengerlifts.com



JESSE SCOTTI
502-523-1522
jesses@challengerlifts.com



AARON OWEN
480-684-4036
aarono@challengerlifts.com



DON GLASER
847-975-7358
donaldg@challengerlifts.com



BRAD FLEMING
610-731-5267
bradleyf@challengerlifts.com



JUAN FRANCO
305-205-0940
+57 310 248112 (COL)
office: +57 601408561 (COL)
juan.e.franco@snapon.com



VSA
214-353-0765
tcole@vsareps.com



JEFF SNYDER
770-490-8415
jsnyder@challengerlifts.com



CUSTOMER CARE & SERVICE
800-648-5438
challengerlifts@soe.freshdesk.com

CL Challenger Lifts



facebook.com/challengerlifts



instagram.com/challengerlifts




linkedin.com/company/challengerlifts



youtube.com/@challengerlifts7727



**PROUD
ALI MEMBER**

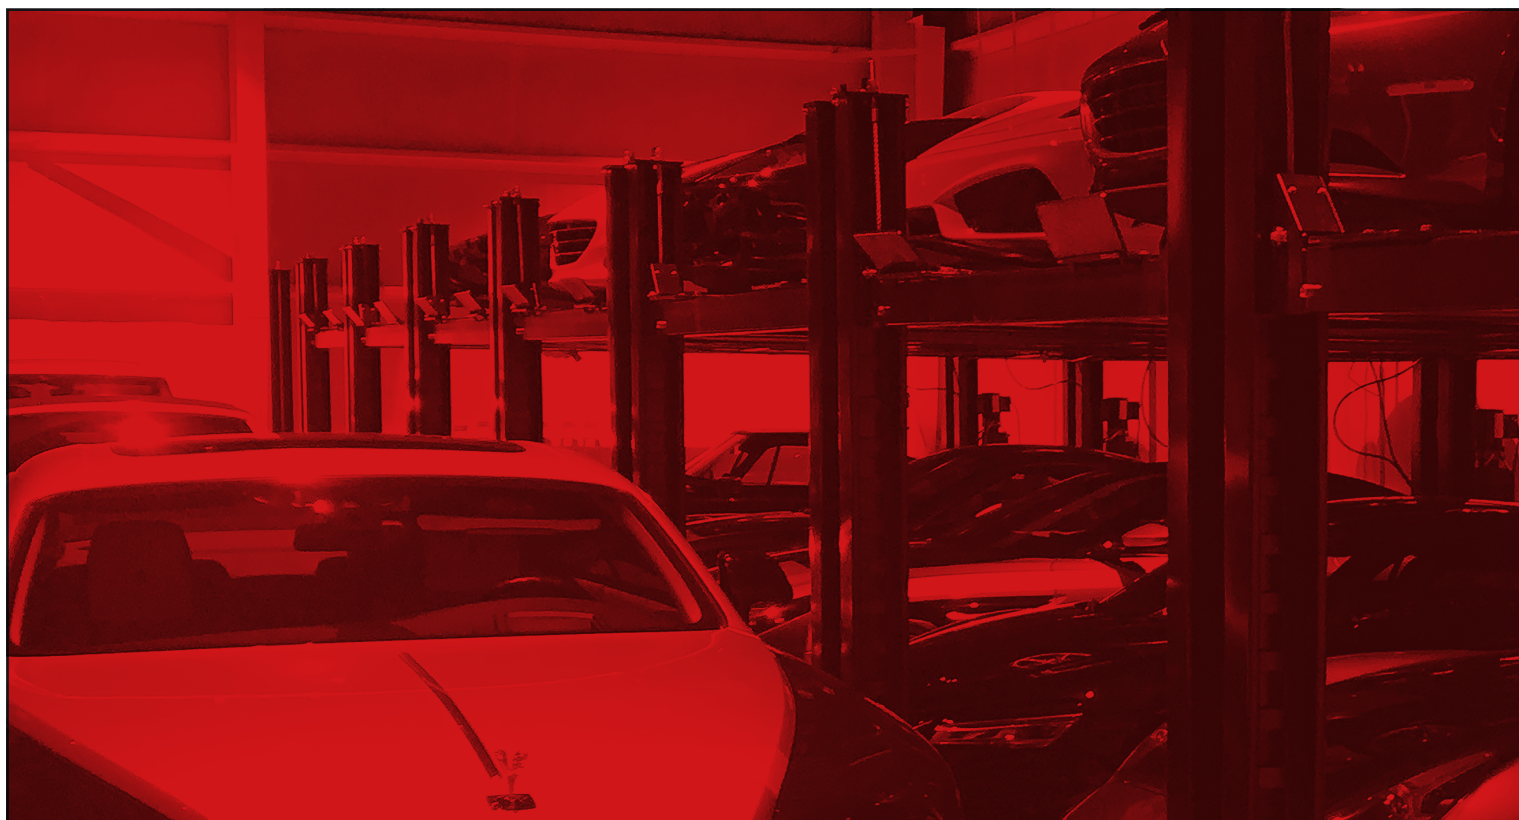

challengerlifts.com



Snap-on® Total Shop Solutions offers a wide range of garage equipment solutions for workshops, garages, car dealers and tire shops, thanks to the specific solutions provided by its portfolio of premium brands. Challenger Lifts is a brand of TSS and is committed to product innovation and improvement. Therefore, specifications listed in this sell sheet may change without notice. ©2025 Snap-on Incorporated. Challenger Lifts is a trademark, in the United States and other countries, of Snap-on Incorporated. All rights reserved. All other marks are marks of their respective holders. ssmi23028c CL-HD-catalog 03/25

