

Aqua

C & I Energy Storage Cabinet

261 kWh (314 Ah)



- Modular design shortens development/deployment time and reduces cost.
- Standard 1,000 Vdc interface for easy integration with third-party PCS systems.
- Modular battery cabinet design, scalable to up to 10 battery systems in parallel (external combiner cabinet required).

Smart & Efficient

- Equipped with an Active-Balancing BMS to improve cell consistency and extend battery cycle life.
- Liquid-cooling thermal management maintains optimal battery temperature.













Email | sales@billionwatts.com.tw

Product Specifications

adet opeemedenons	
Battery	
Rated Energy	261kWh
Nominal Voltage	832Vdc
Voltage Range	728Vdc~936Vdc
Battery Configuration	1P260S
Max Charge/Discharge Current	180A
Self-discharge Rate	≤ 3% per month
Battery Energy Efficiency	≧94%
Charging Temperature Range	0°C~+55 °C
Discharging Temperature Range	-20 °C~+55 °C
Cooling Method	Liquid Cooling
SOC Estimation Accuracy	≦5%
Specifications	
Communication Interface	RJ45
Communication Protocol	Modbus TCP \ CAN bus
Operating Temperature	-30°C~60°C
Operating Humidity	0% ~95% (non-condensing)
Storage Temperature	-20~35°C
Protection	IP54
Corrosion Category	C5
Altitude	3,000m
Fire Protection System	Temperature, Smoke, and Combustible Gas Detection; Aerosol Fire Suppression
Battery Cabinet Dimensions	998x1,310x2,200mm (W*D*H)
Battery Cabinet Weight	2,500 Kg± 20kg
Certification	IEC62619 \ CNS62619 \ IEC60730-1 \ UN38.3

Component Functional Diagram

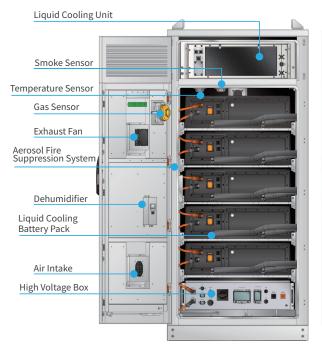

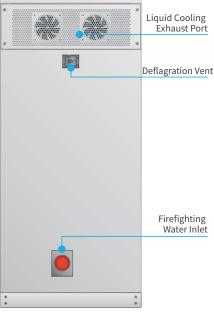

Functional Block Diagram

