

Technical Information

Polar 110



FEATURES

- CombiVac™ Advanced Control System
- Sensor Vacuum Control
- Liquid Control Sensor
- Standard functions include: Compact, Liquids, Fragile/Soft, Trapped Air, Marinate, Tenderize, Vacblanch, Hyperknead, Jarring, Infusion, Red Meat, Compression, Aero Choco, Multi-Step
- 20 Program Memory
- Heavy Duty Seal Bars
- (4) Seal Bar Configuration Options
- Double Sealing Wire
- 4.7" LCD Screen
- Pump maintenance and cleaning program
- Stainless Steel Casing and Transparent Lid
- (2) Insert Plates and Inclined Plate for Liquids
- (1) Service Maintenance Kit
- 12' cord with NEMA 15-50P plug



OPTIONAL ACCESSORIES

- Additional service kit for standard maintenance
- Zebra ZD411 thermal label printer

OPTIONS

- Cut-off / wide seal
- 1-2 Cut-off/Bi-active seal
- Gas Flush (incl. compressed air connection)
- Preparation for External Pump


PRODUCT INFORMATION

Chamber Dimension (L x W x H)	24.4" x 41.3" x 11"
Machine Dimension (L x W x H)	37.3 " x 47.2" x 45.3 "
Pump Capacity	190 m3/h / 5.7 hp
Machine Cycle	20 - 40 sec.
Voltage / Hz	208 - 220 / 3-60Hz
Power (Amps)	29 amps
Weight Net	1024 lbs.

Polar 110 Dimensions



Unit Dimensions

In inches


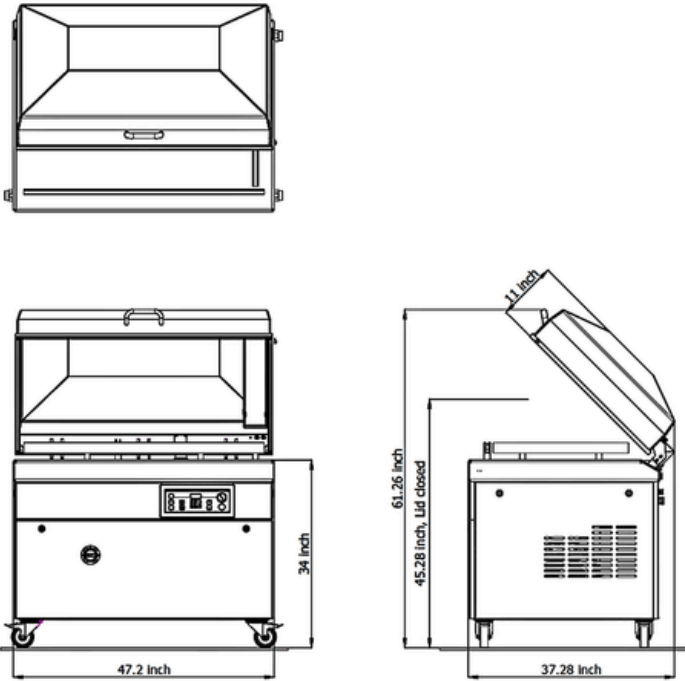


Chamber Dimension Options


Standard



Optional (added cost)

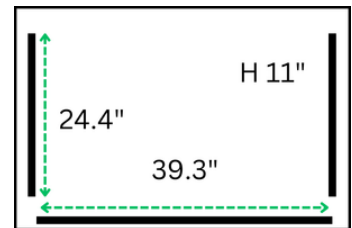

NEMA Plug Configuration



15-50P

Three phase 208 Volt
3 pole, 4 wire grounding

Certifications



3 Years Parts
1 Year Labor



Intertek



Intertek



Invacus LLC
493 W. Fullerton Ave
Elmhurst, IL 60126
+1) 331.979.2013

Sales & Information: info@invacus.com
Technical Support: service@invacus.com
www.invacus.com/
Parts: <https://parts.invacus.com/>